
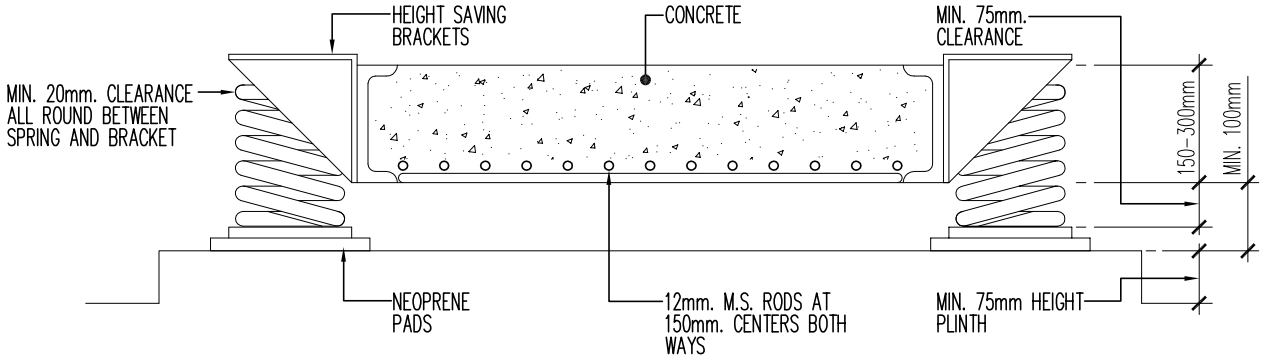


SECTIONAL VIEW

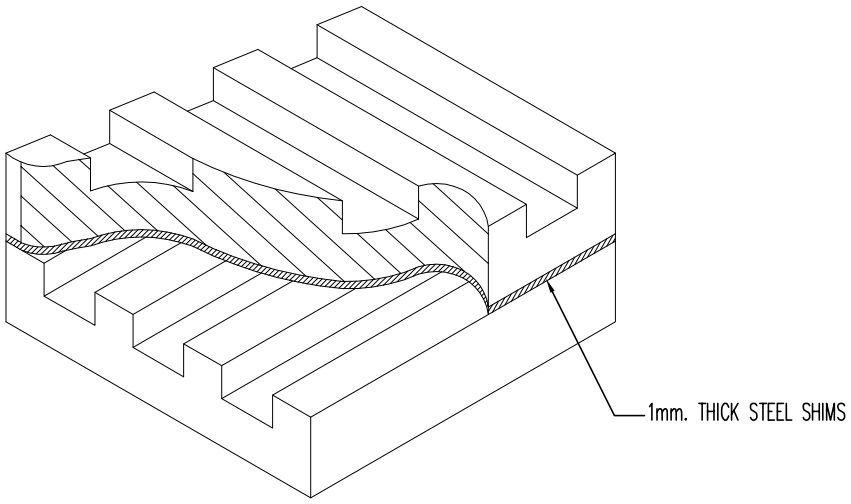

DETAIL OF 40 DUROMETER NEOPRENE PADS
(2 LAYERS x 8mm. thick)

GENERAL NOTES

1. INERTIA BLOCK SIZING, SPRING SELECTIONS AND INSTALLATION SHALL BE MADE IN ACCORDANCE WITH THE SPECIFICATIONS AND SCHEDULE OF ISOLATION EQUIPMENT.
2. INERTIA BLOCK SHALL BE SIZED (IN PLAN) TO SUPPORT THE WEIGHT OF PIPEWORK UP TO AND INCLUDING THE PIPE ELBOWS.
3. TYPICAL DETAIL MAY BE USED FOR PUMPS, FANS AND COMPRESSORS.

Filename: SMGEN-1.dwg

TITLE

TYPICAL REINFORCED CONCRETE INERTIA BLOCK

Alpha Consulting Engineers Pte Ltd

DRAWING NO.

SM(GEN) - 1