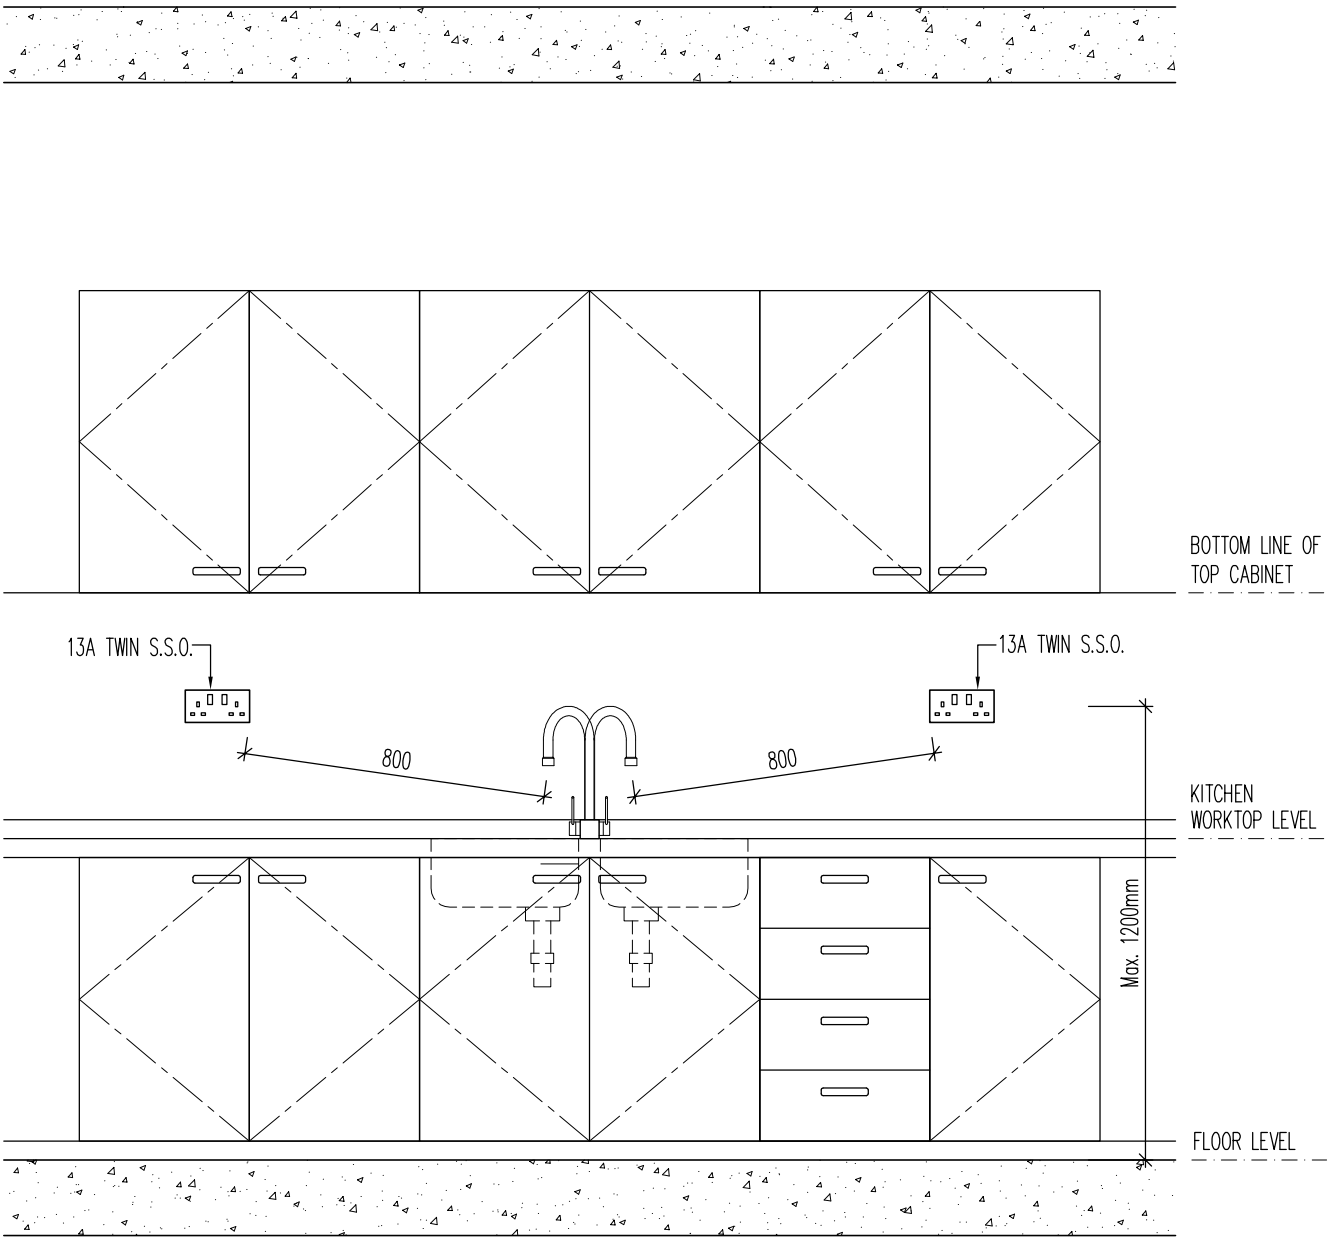


NOTES:

1. SWITCH SOCKET OUTLET (SSO) TO BE INSTALLED AT A MINIMUM DISTANCE OF 800mm AWAY FROM TAP.
2. FOR SWIVELABLE TAPS, THE DISTANCE BETWEEN THE TAP AND THE SSO SHALL BE MEASURED WITH THE TAP SWIVELLED TO ITS EXTREME LEFT OR RIGHT POSITION AS THE CASE MAYBE.
3. AN IP 55 PROTECTIVE COVER MUST BE INSTALLED ON THE SSO IF THE DISTANCE BETWEEN THE TAP AND THE SSO IS LESS THAN 800mm.

Drawing Title

TYPICAL INSTALLATION DETAIL OF SWITCH SOCKET OUTLET MOUNTED NEAR SINK

Alpha Consulting Engineers Pte Ltd	Drawing No. SE(EI) – 29	Rev. A