
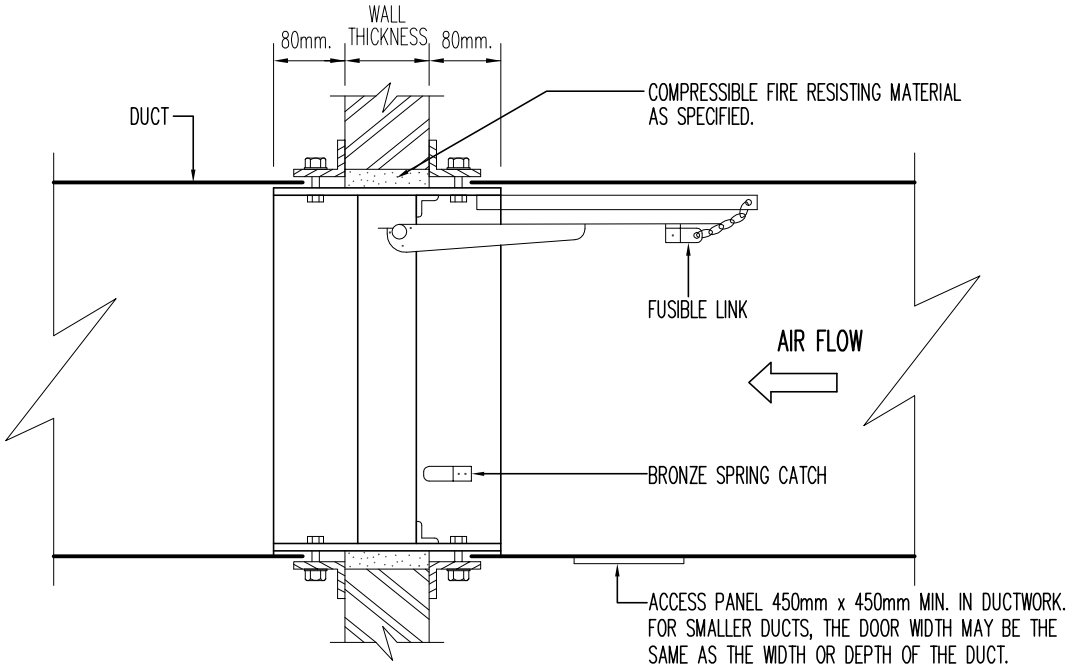



NOTE: CONNECTION OF DUCT TO FIRE DAMPER IS BY MEANS OF CLAMPING PRESSURE OF THE ANGLE IRON & THE FIRE DAMPER CASING. CONNECTION BY RIVET, SELF-TAPPING SCREWS, ETC. IS NOT ALLOWED.

## SINGLE BLADE

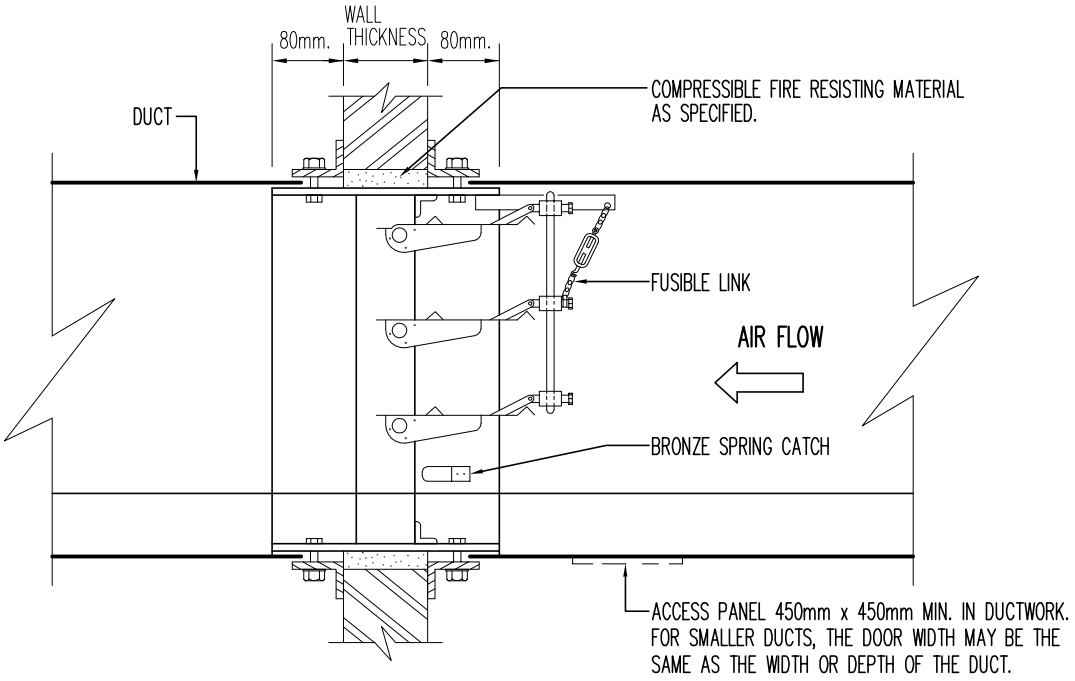


NOTE: CONNECTION OF DUCT TO FIRE DAMPER IS BY MEANS OF CLAMPING PRESSURE OF THE ANGLE IRON & THE FIRE DAMPER CASING. CONNECTION BY RIVET, SELF-TAPPING SCREWS, ETC. IS NOT ALLOWED.

## MULTI BLADE

TITLE

DETAIL OF TYPICAL WALL MOUNTED FIRE DAMPER

*Alpha Consulting Engineers Pte Ltd*

DRAWING NO.

SM(DU) - 4

Filename: SMDU-4.dwg