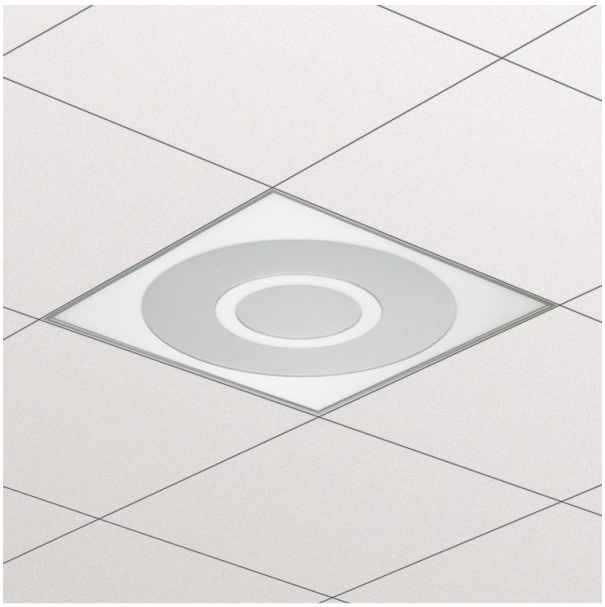

DayZone

BBS560 LED35S/840 PSD AC-MLO-C W

BBS560 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS560 [BBS560]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	840 [840 cool white]
Lamp color temperature	4000 [4000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	No [-]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	W [Plug-in connector 3-pole Wieland/Adels]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	No [-]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	63 Lm/W

• Electrical

Power consumption	56 W [56 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502003303
Full product code	910502003303
Full product name	BBS560 LED35S/840 PSD AC-MLO-C W
Order product name	BBS560 LED35S/840 PSD AC-MLO-C W
Pieces per pack	0
Packs per outerbox	1
Bar code on outerbox - EAN3	8718291272953
Logistic code(s) - 12NC	910502003303

PHILIPS

Net weight per piece 7.200 kg

Dimensional drawing

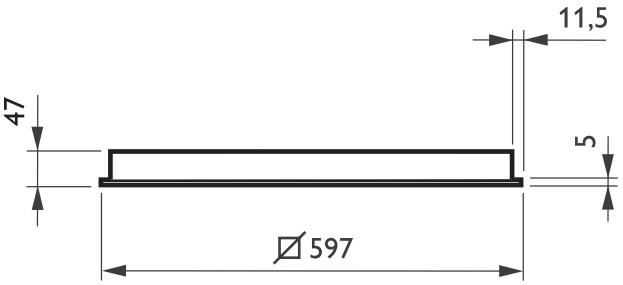

BBS560 LED35S/840 PSD AC-MLO-C W

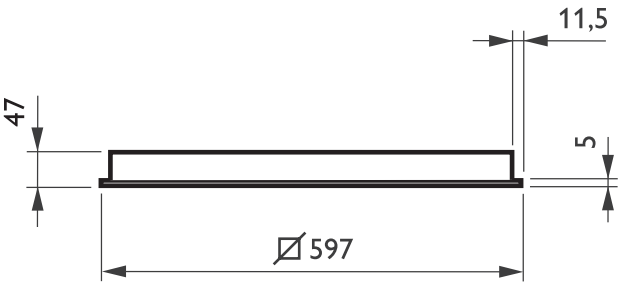

BBS560 LED35S/840 PSD AC-MLO-C W

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

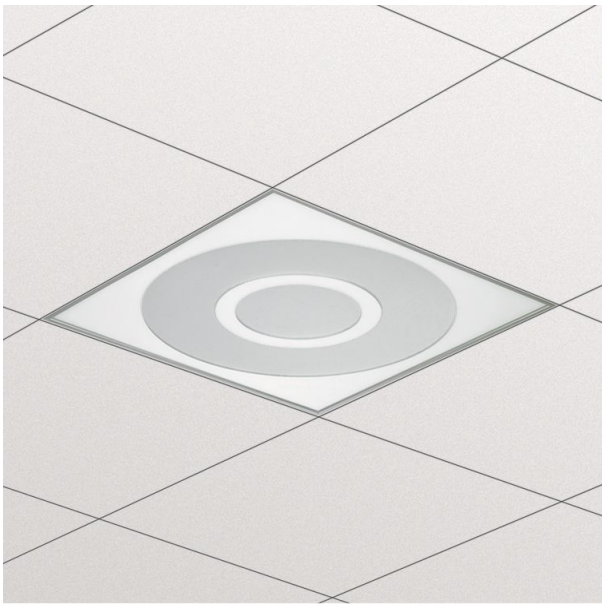

DayZone

BBS560 LED35S/840 PSD AC-MLO-C PI

BBS560 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS560 [BBS560]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	840 [840 cool white]
Lamp color temperature	4000 [4000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	No [-]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	PI [Push-in connector 3-pole]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	No [-]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	63 Lm/W

• Electrical

Power consumption	56 W [56 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502003403
Full product code	910502003403
Full product name	BBS560 LED35S/840 PSD AC-MLO-C PI
Order product name	BBS560 LED35S/840 PSD AC-MLO-C PI
Pieces per pack	0
Packs per outerbox	1
Bar code on outerbox - EAN3	8718291272960
Logistic code(s) - 12NC	910502003403

PHILIPS

Net weight per piece 7.200 kg

Dimensional drawing

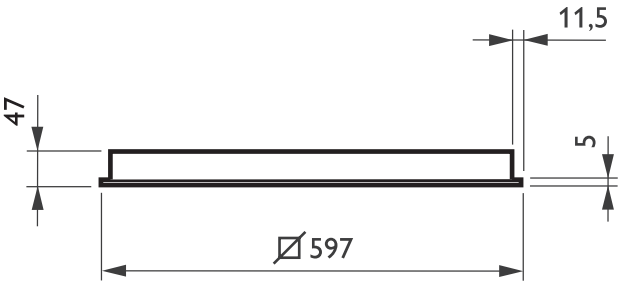

BBS560 LED35S/840 PSD AC-MLO-C PI

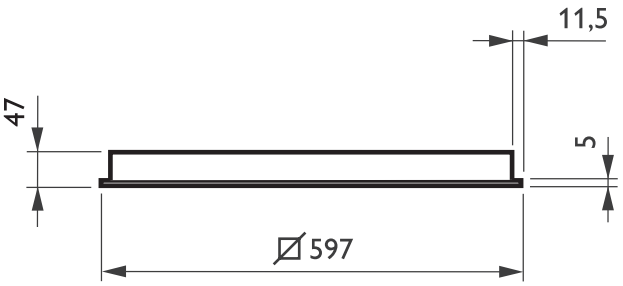

BBS560 LED35S/840 PSD AC-MLO-C PI

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

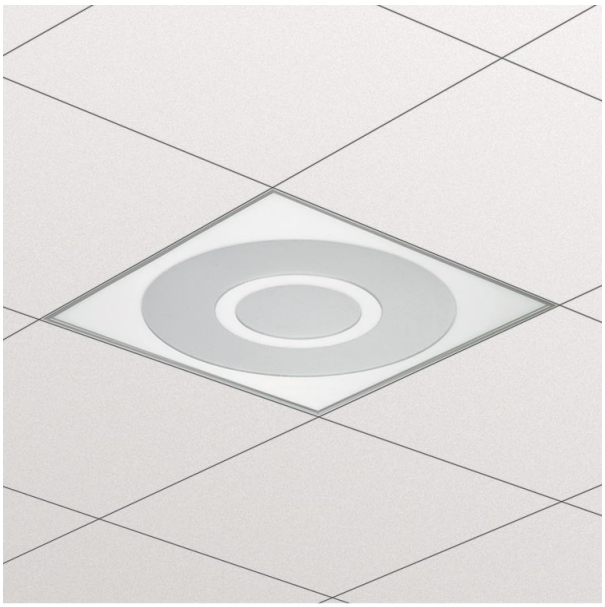

DayZone

BBS560 LED35S/840 PSD AC-MLO-C W SC

BBS560 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS560 [BBS560]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	840 [840 cool white]
Lamp color temperature	4000 [4000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	No [-]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	W [Plug-in connector 3-pole Wieland/Adels]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	SC [Safety cable]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	63 Lm/W

• Electrical

Power consumption	56 W [56 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502004903
Full product code	910502004903
Full product name	BBS560 LED35S/840 PSD AC-MLO-C W SC
Order product name	BBS560 LED35S/840 PSD AC-MLO-C W SC
Pieces per pack	0
Packs per outerbox	1
Bar code on outerbox - EAN3	8718291273110
Logistic code(s) - 12NC	910502004903

PHILIPS

Net weight per piece 7.200 kg

IP 40 IK 02 650°C F

Dimensional drawing

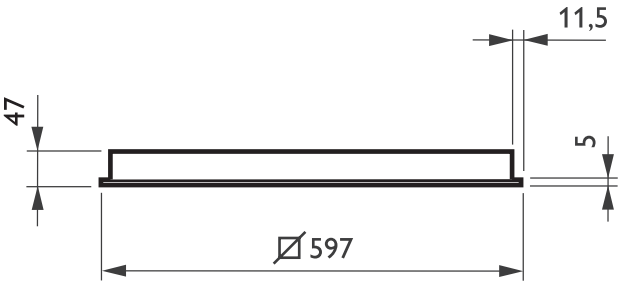

BBS560 LED35S/840 PSD AC-MLO-C W SC

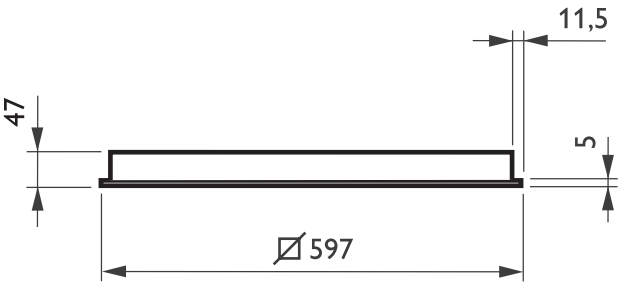

BBS560 LED35S/840 PSD AC-MLO-C W SC

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

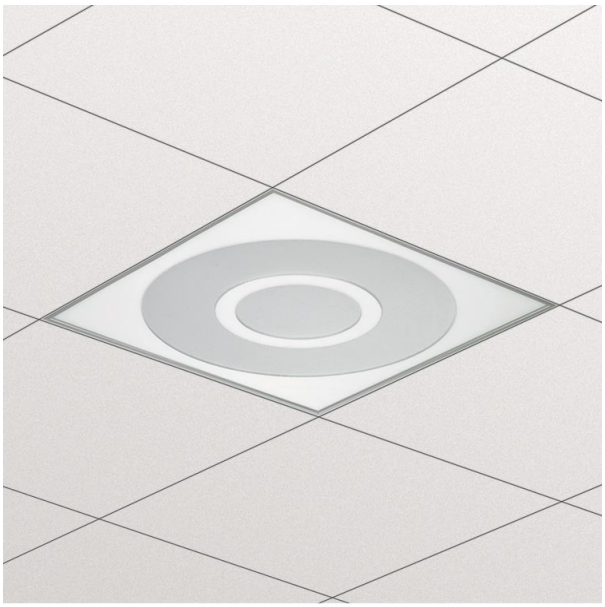

DayZone

BBS560 LED35S/830 PSD AC-MLO-C W

BBS560 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS560 [BBS560]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	830 [830 warm white]
Lamp color temperature	3000 [3000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	No [-]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	W [Plug-in connector 3-pole Wieland/Adels]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	No [-]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	57 Lm/W

• Electrical

Power consumption	61 W [61 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502003603
Full product code	910502003603
Full product name	BBS560 LED35S/830 PSD AC-MLO-C W
Order product name	BBS560 LED35S/830 PSD AC-MLO-C W
Pieces per pack	0
Packs per outerbox	1
Bar code on outerbox - EAN3	8718291272984
Logistic code(s) - 12NC	910502003603

PHILIPS

Net weight per piece 7.200 kg

IP 40 IK 02 650°C F

Dimensional drawing

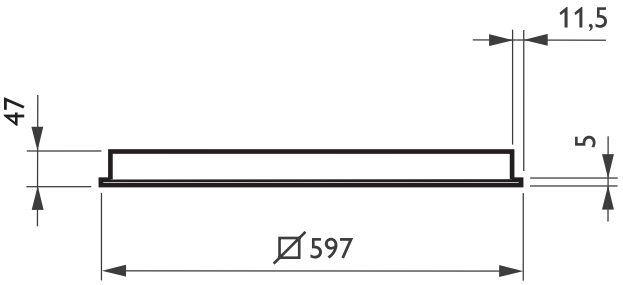

BBS560 LED35S/830 PSD AC-MLO-C W

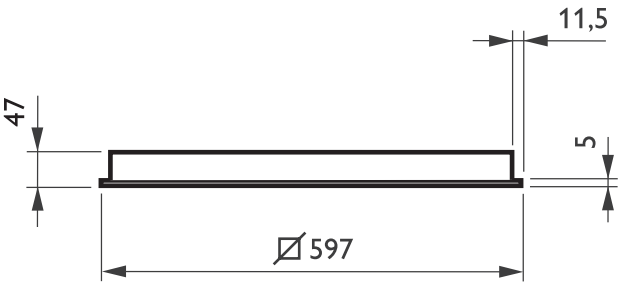

BBS560 LED35S/830 PSD AC-MLO-C W

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, August 14
data subject to change

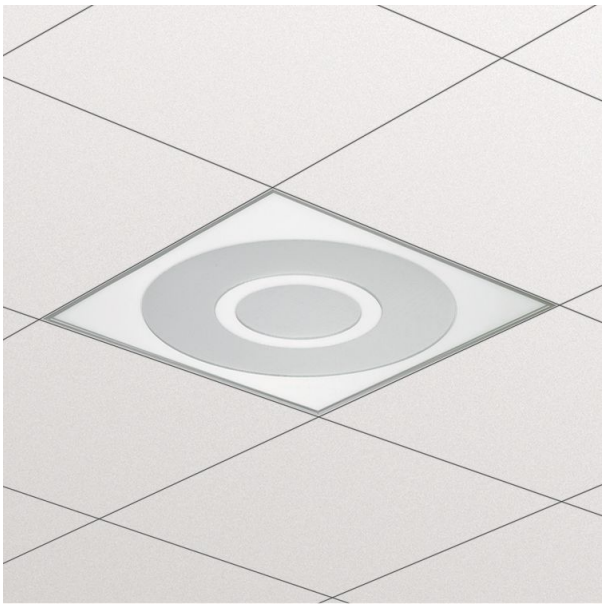

DayZone

BBS560 LED35S/830 PSD AC-MLO-C W SC

BBS560 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS560 [BBS560]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	830 [830 warm white]
Lamp color temperature	3000 [3000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	No [-]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	W [Plug-in connector 3-pole Wieland/Adels]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	SC [Safety cable]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	57 Lm/W

• Electrical

Power consumption	61 W [61 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502005103
Full product code	910502005103
Full product name	BBS560 LED35S/830 PSD AC-MLO-C W SC
Order product name	BBS560 LED35S/830 PSD AC-MLO-C W SC
Pieces per pack	0
Packs per outerbox	1
Bar code on outerbox - EAN3	8718291273134
Logistic code(s) - 12NC	910502005103

PHILIPS

Net weight per piece 7.200 kg

Dimensional drawing

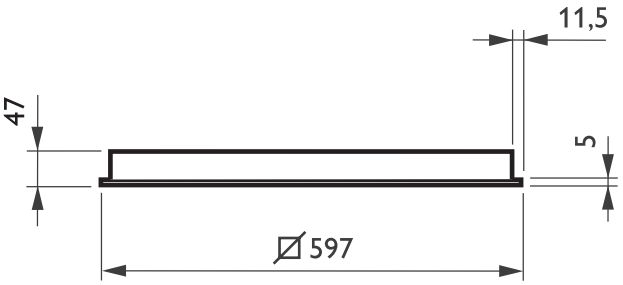

BBS560 LED35S/830 PSD AC-MLO-C W SC

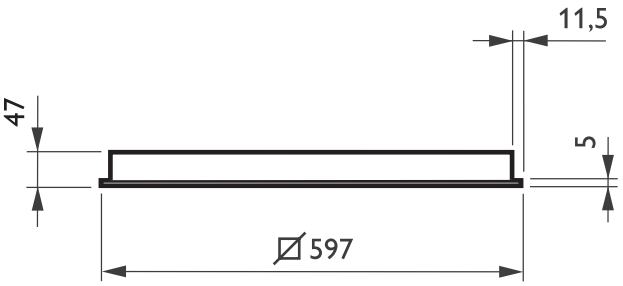

BBS560 LED35S/830 PSD AC-MLO-C W SC

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

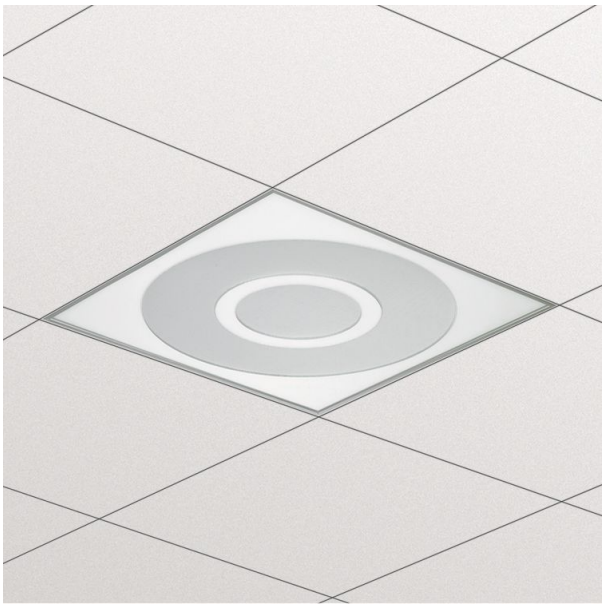

DayZone

BBS560 LED35S/830 PSD AC-MLO-C PI

BBS560 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS560 [BBS560]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	830 [830 warm white]
Lamp color temperature	3000 [3000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	No [-]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	PI [Push-in connector 3-pole]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	No [-]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	57 Lm/W

• Electrical

Power consumption	61 W [61 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502003703
Full product code	910502003703
Full product name	BBS560 LED35S/830 PSD AC-MLO-C PI
Order product name	BBS560 LED35S/830 PSD AC-MLO-C PI
Pieces per pack	0
Packs per outerbox	1
Bar code on outerbox - EAN3	8718291272991
Logistic code(s) - 12NC	910502003703

PHILIPS

Net weight per piece 7.200 kg

Dimensional drawing

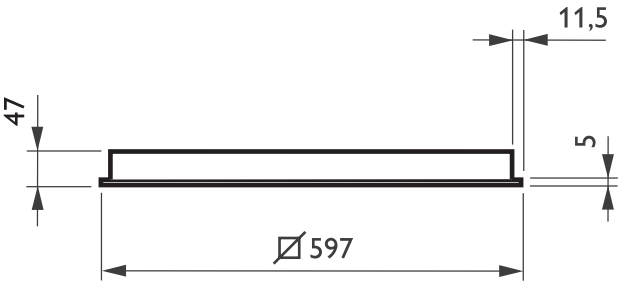

BBS560 LED35S/830 PSD AC-MLO-C PI

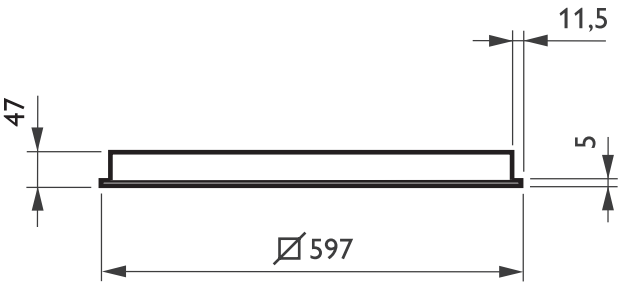

BBS560 LED35S/830 PSD AC-MLO-C PI

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

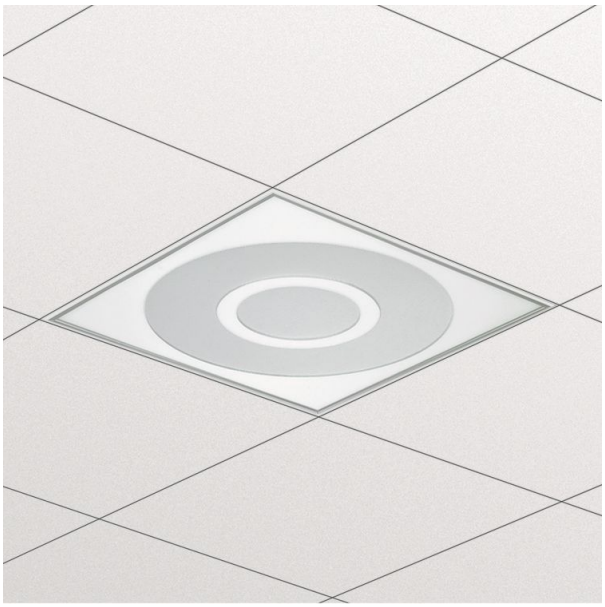

DayZone

BBS562 LED35S/840 PSD AC-MLO-C W

BBS562 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS562 [BBS562]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	840 [840 cool white]
Lamp color temperature	4000 [4000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	No [-]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	W [Plug-in connector 3-pole Wieland/Adels]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	No [-]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	63 Lm/W

• Electrical

Power consumption	56 W [56 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502003903
Full product code	910502003903
Full product name	BBS562 LED35S/840 PSD AC-MLO-C W
Order product name	BBS562 LED35S/840 PSD AC-MLO-C W
Pieces per pack	0
Packs per outerbox	1
Bar code on outerbox - EAN3	8718291273011
Logistic code(s) - 12NC	910502003903

PHILIPS

Net weight per piece 7.200 kg

Dimensional drawing

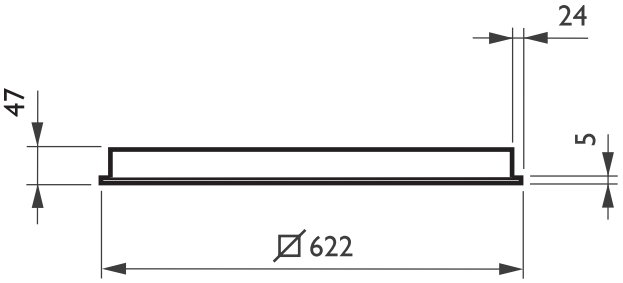

BBS562 LED35S/840 PSD AC-MLO-C W

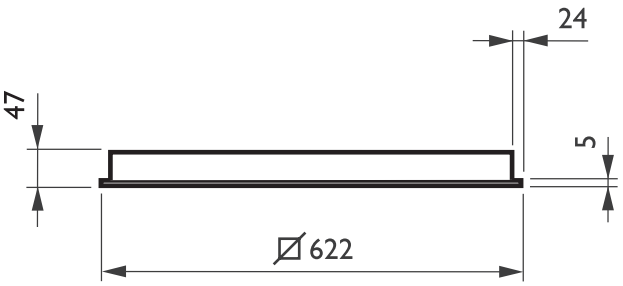

BBS562 LED35S/840 PSD AC-MLO-C W

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

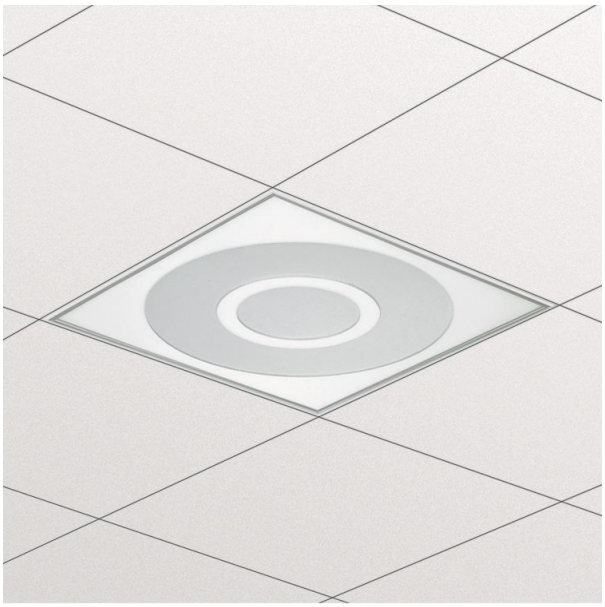

DayZone

BBS562 LED35S/840 PSD AC-MLO-C PI

BBS562 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS562 [BBS562]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	840 [840 cool white]
Lamp color temperature	4000 [4000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	No [-]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	PI [Push-in connector 3-pole]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	No [-]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	63 Lm/W

• Electrical

Power consumption	56 W [56 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502004003
Full product code	910502004003
Full product name	BBS562 LED35S/840 PSD AC-MLO-C PI
Order product name	BBS562 LED35S/840 PSD AC-MLO-C PI
Pieces per pack	0
Packs per outerbox	1
Bar code on outerbox - EAN3	8718291273028
Logistic code(s) - 12NC	910502004003

PHILIPS

Net weight per piece 7.200 kg

IP 40 IK 02 650°C F

Dimensional drawing

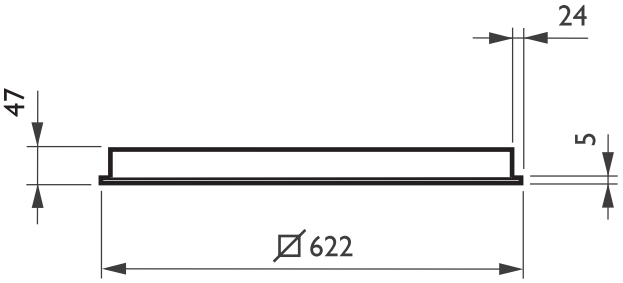

BBS562 LED35S/840 PSD AC-MLO-C PI

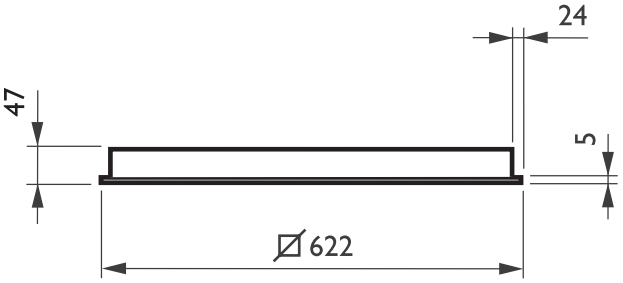

BBS562 LED35S/840 PSD AC-MLO-C PI

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

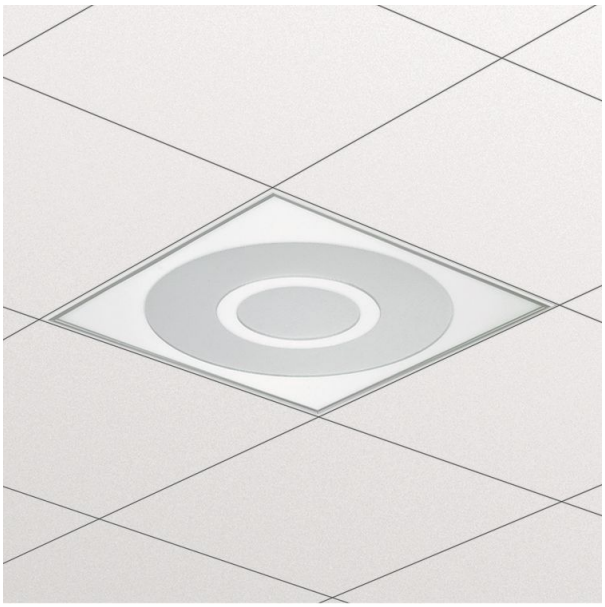

DayZone

BBS562 LED35S/830 PSD AC-MLO-C W

BBS562 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS562 [BBS562]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	830 [830 warm white]
Lamp color temperature	3000 [3000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	No [-]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	W [Plug-in connector 3-pole Wieland/Adels]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	No [-]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	57 Lm/W

• Electrical

Power consumption	61 W [61 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502004203
Full product code	910502004203
Full product name	BBS562 LED35S/830 PSD AC-MLO-C W
Order product name	BBS562 LED35S/830 PSD AC-MLO-C W
Pieces per pack	0
Packs per outerbox	1
Bar code on outerbox - EAN3	8718291273042
Logistic code(s) - 12NC	910502004203

PHILIPS

Net weight per piece 7.200 kg

IP 40 IK 02 650°C F

Dimensional drawing

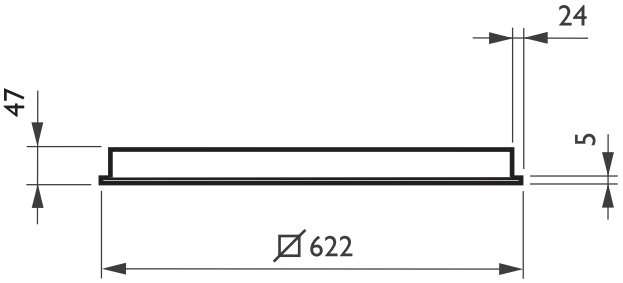

BBS562 LED35S/830 PSD AC-MLO-C W

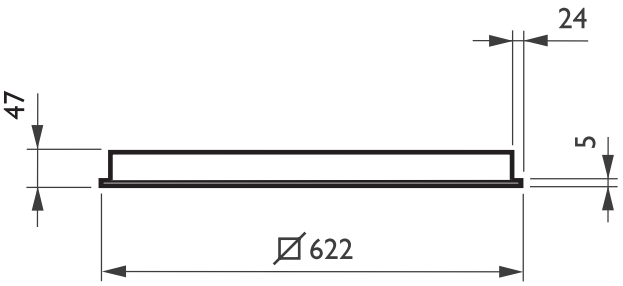

BBS562 LED35S/830 PSD AC-MLO-C W

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

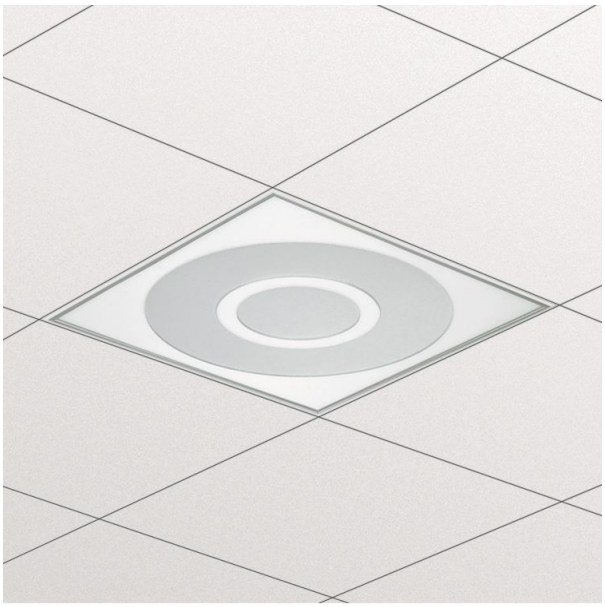

DayZone

BBS562 LED35S/830 PSD AC-MLO-C PI

BBS562 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS562 [BBS562]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	830 [830 warm white]
Lamp color temperature	3000 [3000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	No [-]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	PI [Push-in connector 3-pole]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	No [-]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	57 Lm/W

• Electrical

Power consumption	61 W [61 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502004303
Full product code	910502004303
Full product name	BBS562 LED35S/830 PSD AC-MLO-C PI
Order product name	BBS562 LED35S/830 PSD AC-MLO-C PI
Pieces per pack	0
Packs per outerbox	1
Bar code on outerbox - EAN3	8718291273059
Logistic code(s) - 12NC	910502004303

PHILIPS

DayZone

Net weight per piece 7.200 kg

IP 40 IK 02 650°C F

Dimensional drawing

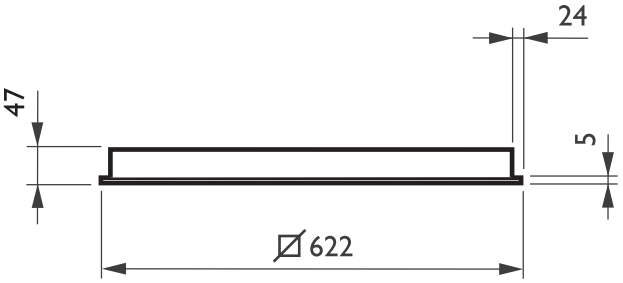

BBS562 LED35S/830 PSD AC-MLO-C PI

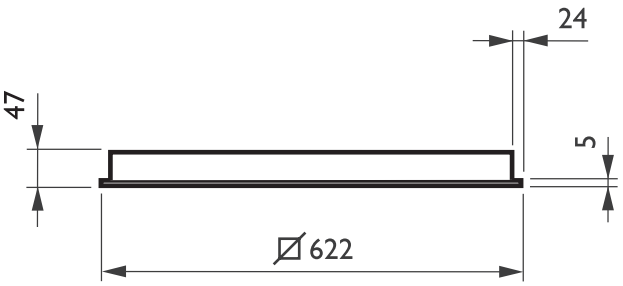

BBS562 LED35S/830 PSD AC-MLO-C PI

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, August 14
data subject to change

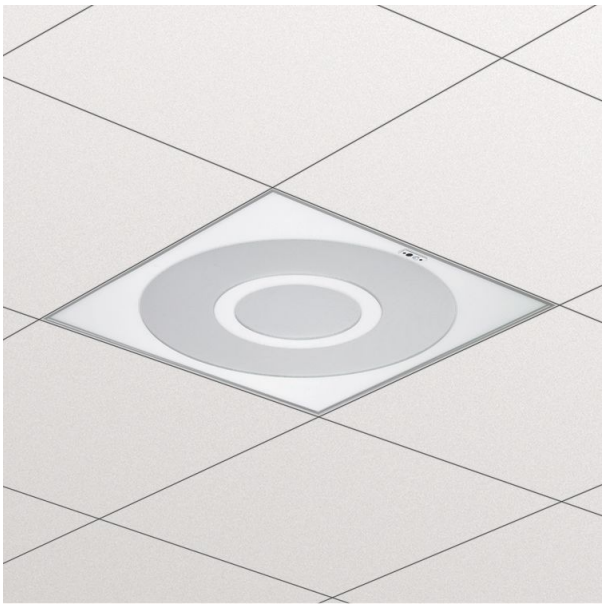

DayZone

BBS560 LED35S/840 PSD AC-MLO-C ACL W

BBS560 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular - ActiLume

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS560 [BBS560]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	840 [840 cool white]
Lamp color temperature	4000 [4000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	ACL [ActiLume]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	W [Plug-in connector 3-pole Wieland/Adels]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	No [-]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	63 Lm/W

• Electrical

Power consumption	56 W [56 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502003503
Full product code	910502003503
Full product name	BBS560 LED35S/840 PSD AC-MLO-C ACL W
Order product name	BBS560 LED35S/840 PSD AC-MLO-C ACL W
Pieces per pack	0
Packs per outerbox	1

PHILIPS

DayZone

Bar code on outerbox - EAN3	8718291272977
Logistic code(s) - 12NC	910502003503

Net weight per piece 7.300 kg

Dimensional drawing

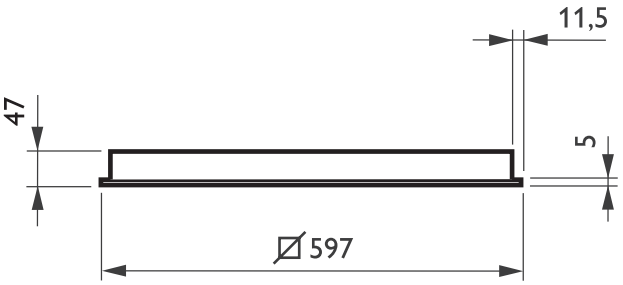

BBS560 LED35S/840 PSD AC-MLO-C ACL W

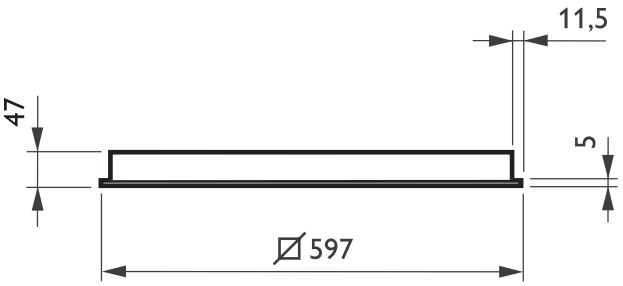

BBS560 LED35S/840 PSD AC-MLO-C ACL W

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, August 14
data subject to change

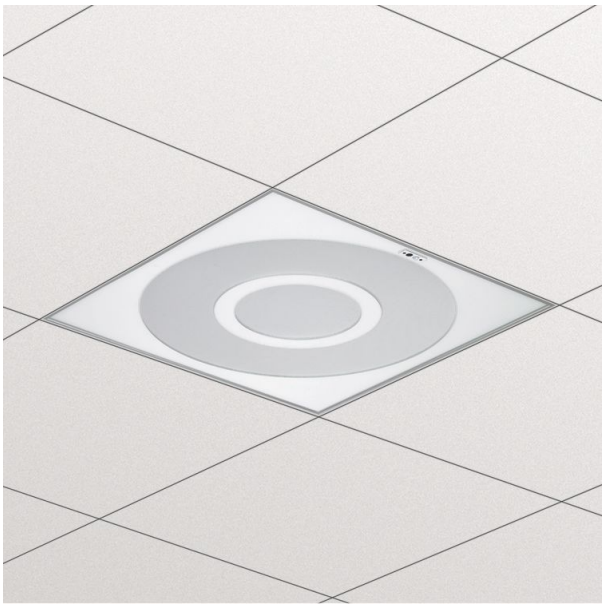

DayZone

BBS562 LED35S/830 PSD AC-MLO-C ACL W

BBS562 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular - ActiLume

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS562 [BBS562]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	830 [830 warm white]
Lamp color temperature	3000 [3000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	ACL [ActiLume]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	W [Plug-in connector 3-pole Wieland/Adels]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	No [-]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	57 Lm/W

• Electrical

Power consumption	61 W [61 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502004403
Full product code	910502004403
Full product name	BBS562 LED35S/830 PSD AC-MLO-C ACL W
Order product name	BBS562 LED35S/830 PSD AC-MLO-C ACL W
Pieces per pack	0
Packs per outerbox	1

PHILIPS

DayZone

Bar code on outerbox - EAN3	8718291273066
Logistic code(s) - 12NC	910502004403

Net weight per piece 7.300 kg

IP 40 IK 02 650°C

Dimensional drawing

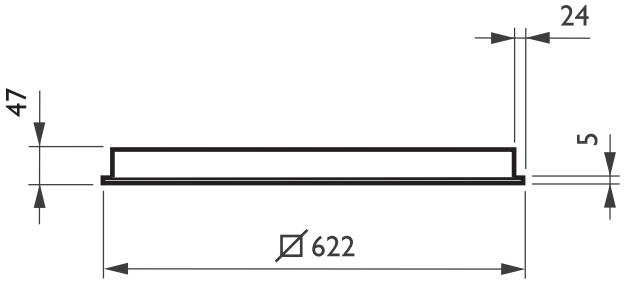

BBS562 LED35S/830 PSD AC-MLO-C ACL W

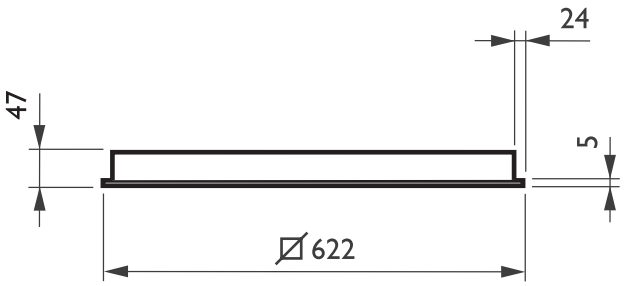

BBS562 LED35S/830 PSD AC-MLO-C ACL W

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, August 14
data subject to change

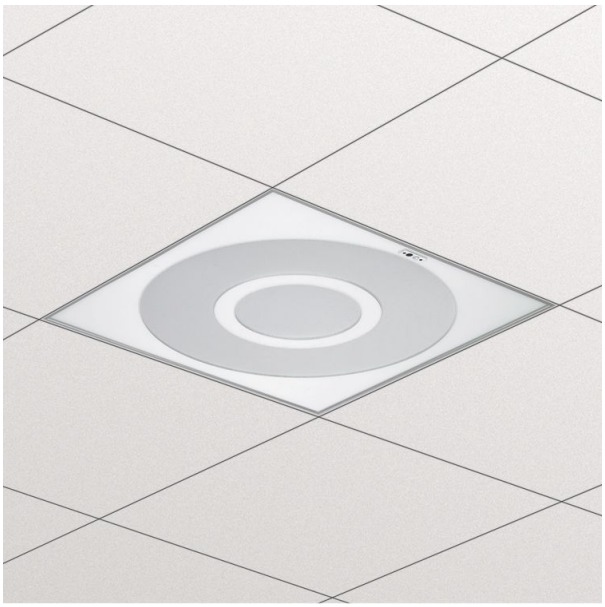

DayZone

BBS560 LED35S/840 PSD AC-MLO-C ACL W SC

BBS560 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular - ActiLume

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS560 [BBS560]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	840 [840 cool white]
Lamp color temperature	4000 [4000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	ACL [ActiLume]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	W [Plug-in connector 3-pole Wieland/Adels]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	SC [Safety cable]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	63 Lm/W

• Electrical

Power consumption	56 W [56 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502005003
Full product code	910502005003
Full product name	BBS560 LED35S/840 PSD AC-MLO-C ACL W SC
Order product name	BBS560 LED35S/840 PSD AC-MLO-C ACL W SC
Pieces per pack	0
Packs per outerbox	1

PHILIPS

DayZone

Bar code on outerbox - EAN3	8718291273127
Logistic code(s) - 12NC	910502005003

Net weight per piece 7.300 kg

IP 40 IK 02 650°C

Dimensional drawing

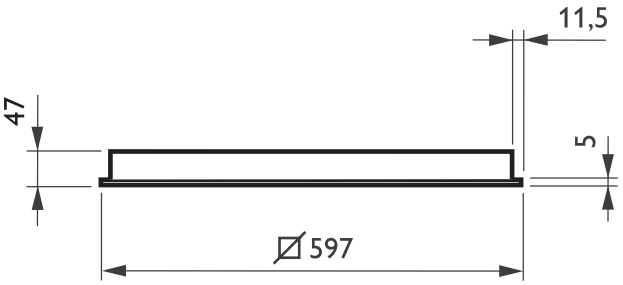

BBS560 LED35S/840 PSD AC-MLO-C ACL W SC

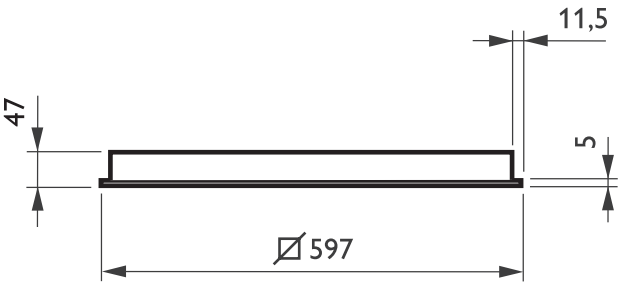

BBS560 LED35S/840 PSD AC-MLO-C ACL W SC

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, August 14
data subject to change

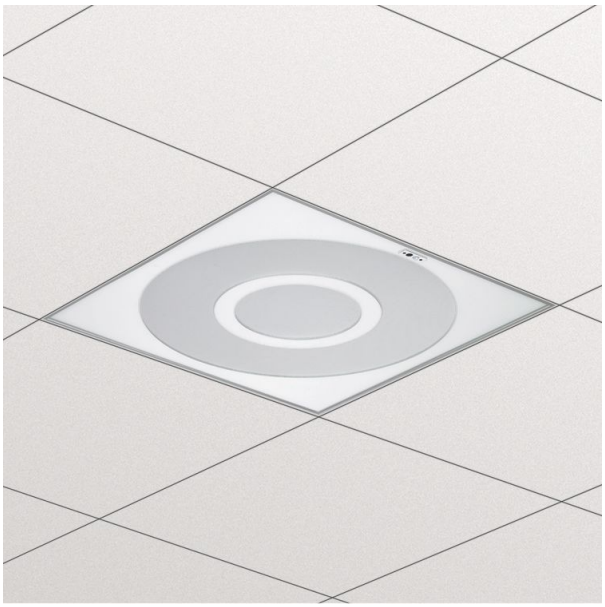

DayZone

BBS560 LED35S/830 PSD AC-MLO-C ACL W SC

BBS560 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular - ActiLume

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS560 [BBS560]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	830 [830 warm white]
Lamp color temperature	3000 [3000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	ACL [ActiLume]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	W [Plug-in connector 3-pole Wieland/Adels]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	SC [Safety cable]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	57 Lm/W

• Electrical

Power consumption	61 W [61 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502005203
Full product code	910502005203
Full product name	BBS560 LED35S/830 PSD AC-MLO-C ACL W SC
Order product name	BBS560 LED35S/830 PSD AC-MLO-C ACL W SC
Pieces per pack	0
Packs per outerbox	1

PHILIPS

DayZone

Bar code on outerbox - EAN3	8718291273141
Logistic code(s) - 12NC	910502005203

Net weight per piece 7.300 kg

IP 40 IK 02 650°C F

Dimensional drawing

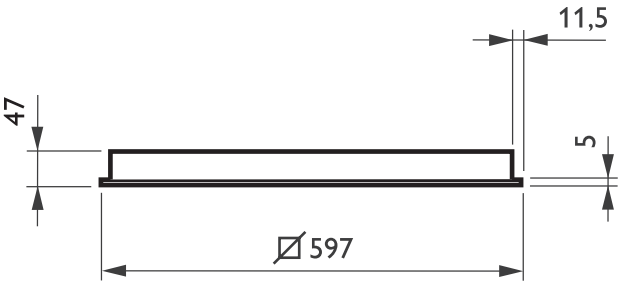

BBS560 LED35S/830 PSD AC-MLO-C ACL W SC

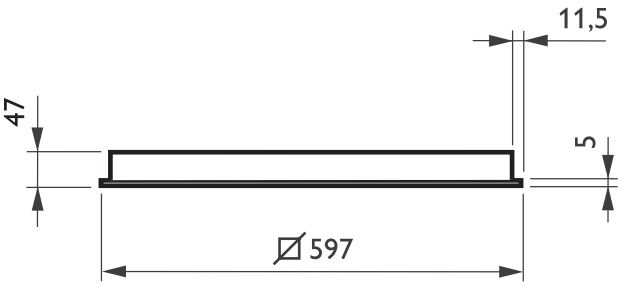

BBS560 LED35S/830 PSD AC-MLO-C ACL W SC

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, August 14
data subject to change

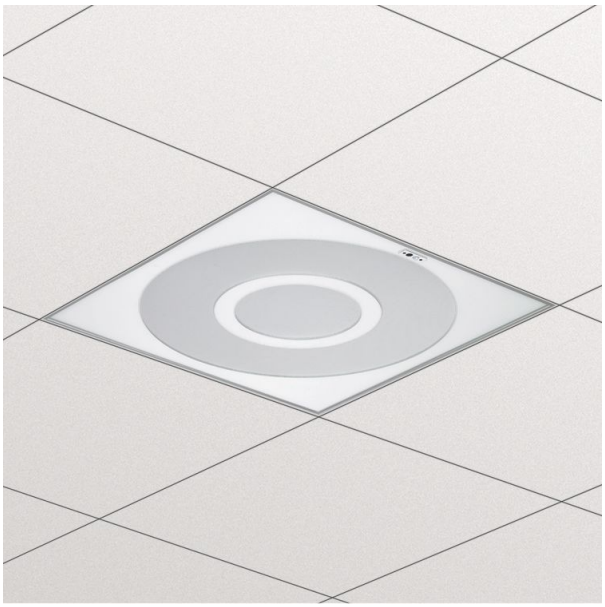

DayZone

BBS562 LED35S/840 PSD AC-MLO-C ACL W

BBS562 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular - ActiLume

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS562 [BBS562]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	840 [840 cool white]
Lamp color temperature	4000 [4000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	ACL [ActiLume]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	W [Plug-in connector 3-pole Wieland/Adels]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	No [-]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	63 Lm/W

• Electrical

Power consumption	56 W [56 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502004103
Full product code	910502004103
Full product name	BBS562 LED35S/840 PSD AC-MLO-C ACL W
Order product name	BBS562 LED35S/840 PSD AC-MLO-C ACL W
Pieces per pack	0
Packs per outerbox	1

PHILIPS

DayZone

Bar code on outerbox - EAN3	8718291273035
Logistic code(s) - 12NC	910502004103

Net weight per piece 7.300 kg

IP 40 IK 02 650°C

Dimensional drawing

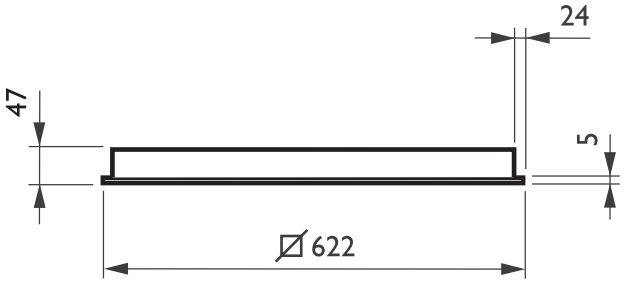

BBS562 LED35S/840 PSD AC-MLO-C ACL W

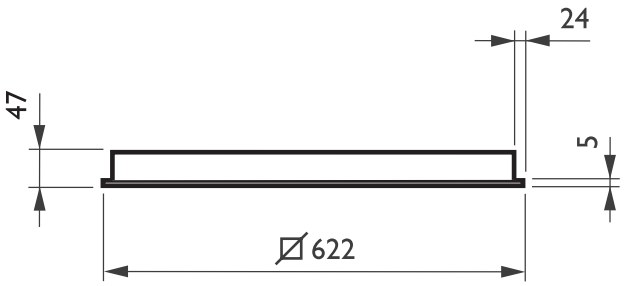

BBS562 LED35S/840 PSD AC-MLO-C ACL W

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, August 14
data subject to change



DayZone

BBS561 LED35S/830 PSD AC-MLO-C W

BBS561 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS561 [BBS561]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	830 [830 warm white]
Lamp color temperature	3000 [3000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	No [-]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	W [Plug-in connector 3-pole Wieland/Adels]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	No [-]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	57 Lm/W

• Electrical

Power consumption	61 W [61 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502004703
Full product code	910502004703
Full product name	BBS561 LED35S/830 PSD AC-MLO-C W
Order product name	BBS561 LED35S/830 PSD AC-MLO-C W
Pieces per pack	0
Packs per outerbox	1
Bar code on outerbox - EAN3	8718291273097
Logistic code(s) - 12NC	910502004703

PHILIPS

DayZone

Net weight per piece 6.600 kg

IP 40 IK 02 650°C F

Dimensional drawing

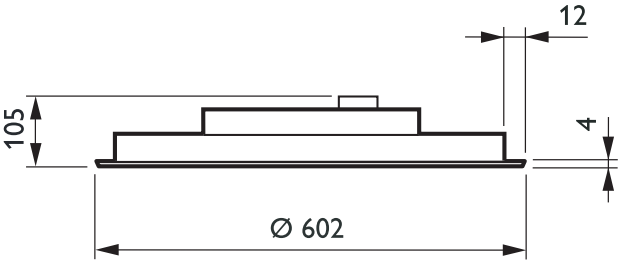

BBS561 LED35S/830 PSD AC-MLO-C W

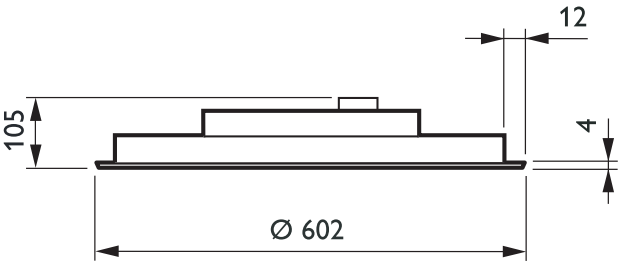

BBS561 LED35S/830 PSD AC-MLO-C W

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, August 14
data subject to change

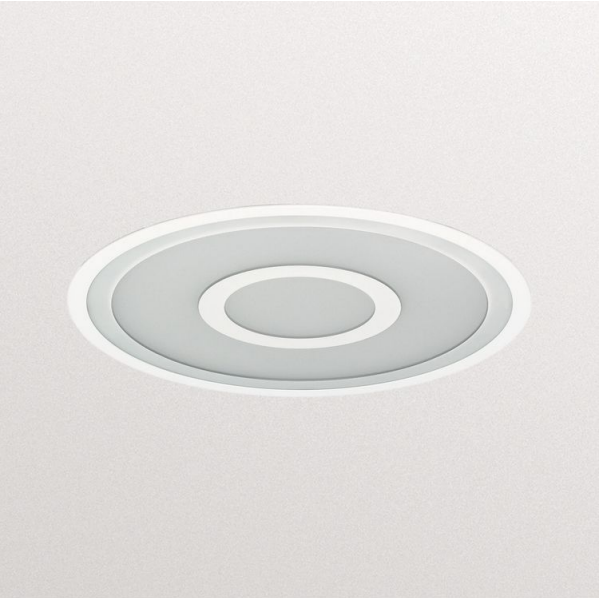

BBS561 LED35S/840 PSD AC-MLO-C SW PI

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

- General information

Product family code	BBS561 [BBS561]

- Product Data

Order code	910502007303
Full product code	910502007303
Full product name	BBS561 LED35S/840 PSD AC-MLO-C SW PI
Order product name	BBS561 LED35S/840 PSD AC-MLO-C SW PI
Pieces per pack	0
Packs per outerbox	1
Bar code on outerbox - EAN3	8718291267362
Logistic code(s) - 12NC	910502007303
Net weight per piece	6.600 kg

PHILIPS



DayZone

BBS561 LED35S/830 PSD AC-MLO-C W SC

BBS561 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS561 [BBS561]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	830 [830 warm white]
Lamp color temperature	3000 [3000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	No [-]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	W [Plug-in connector 3-pole Wieland/Adels]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	SC [Safety cable]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	57 Lm/W

• Electrical

Power consumption	61 W [61 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502005403
Full product code	910502005403
Full product name	BBS561 LED35S/830 PSD AC-MLO-C W SC
Order product name	BBS561 LED35S/830 PSD AC-MLO-C W SC
Pieces per pack	0
Packs per outerbox	1
Bar code on outerbox - EAN3	8718291273165
Logistic code(s) - 12NC	910502005403

PHILIPS

Net weight per piece 6.600 kg

Dimensional drawing

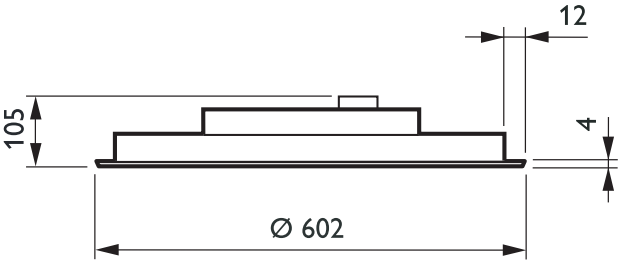

BBS561 LED35S/830 PSD AC-MLO-C W SC

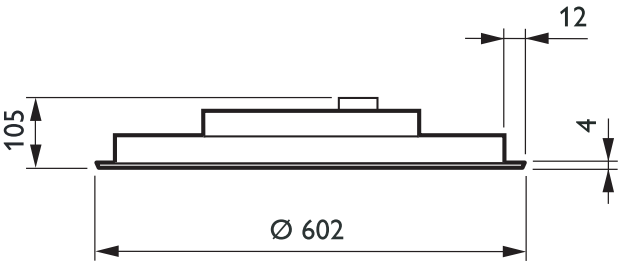

BBS561 LED35S/830 PSD AC-MLO-C W SC

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting



DayZone

BBS561 LED35S/840 PSD AC-MLO-C PI

BBS561 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS561 [BBS561]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	840 [840 cool white]
Lamp color temperature	4000 [4000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	No [-]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	PI [Push-in connector 3-pole]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	No [-]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	63 Lm/W

• Electrical

Power consumption	56 W [56 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502004603
Full product code	910502004603
Full product name	BBS561 LED35S/840 PSD AC-MLO-C PI
Order product name	BBS561 LED35S/840 PSD AC-MLO-C PI
Pieces per pack	0
Packs per outerbox	1
Bar code on outerbox - EAN3	8718291273080
Logistic code(s) - 12NC	910502004603

PHILIPS

DayZone

Net weight per piece 6.600 kg

IP 40 IK 02 650°C F

Dimensional drawing

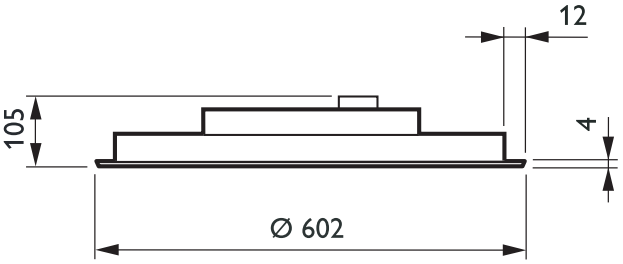

BBS561 LED35S/840 PSD AC-MLO-C PI

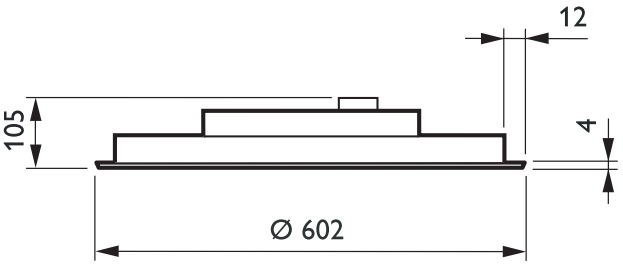

BBS561 LED35S/840 PSD AC-MLO-C PI

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, August 14
data subject to change



DayZone

BBS561 LED35S/840 PSD AC-MLO-C W SC

BBS561 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic circular

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS561 [BBS561]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	840 [840 cool white]
Lamp color temperature	4000 [4000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO-C [Acrylate micro-lens optic circular]
Emergency lighting	No [-]
Lighting control unit	No [-]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	W [Plug-in connector 3-pole Wieland/Adels]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	SC [Safety cable]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	63 Lm/W

• Electrical

Power consumption	56 W [56 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502005303
Full product code	910502005303
Full product name	BBS561 LED35S/840 PSD AC-MLO-C W SC
Order product name	BBS561 LED35S/840 PSD AC-MLO-C W SC
Pieces per pack	0
Packs per outerbox	1
Bar code on outerbox - EAN3	8718291273158
Logistic code(s) - 12NC	910502005303

PHILIPS

Net weight per piece 6.600 kg

Dimensional drawing

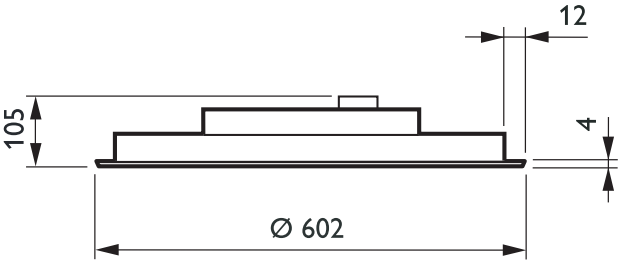

BBS561 LED35S/840 PSD AC-MLO-C W SC

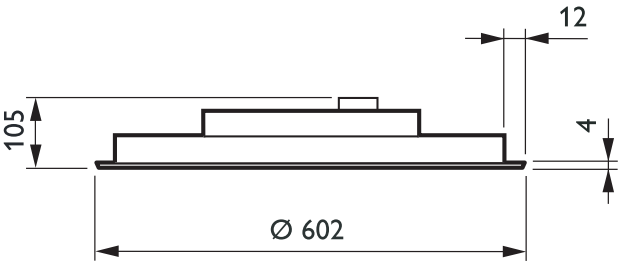

BBS561 LED35S/840 PSD AC-MLO-C W SC

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting



DayZone

BBS560 LED35S/840 PSD AC-MLO W

BBS560 - LED Module, system flux 3500 lm - Power supply unit with DALI interface - Acrylate micro-lens optic

For general office lighting, customers want to capture the benefits LED technology has to offer – sustainability and fresh, high-impact design, without compromising visual comfort.Our DayZone recessed LED luminaire delivers high-quality functional lighting with an energy efficiency that matches or even outperforms traditional fluorescent systems. But what makes DayZone really shine is its impressive visual comfort. Our innovative use of LED technology has created a luminaire that breaks away from fluorescent lighting designs of the past to offer a striking appearance and light effect. Glare control and color consistency are compliant with future office norms.DayZone is available in square versions and, to ensure a better fit in plaster ceiling applications, in a round housing.

Product data

• General information

Product family code	BBS560 [BBS560]
Number of lamps	1 [1 pc]
Lamp family code	LED35S [LED Module, system flux 3500 lm]
Lamp color code	840 [840 cool white]
Lamp color temperature	4000 [4000 K]
Light source replaceable	false [No]
Gear	No [-]
Transformer/ power supply unit	PSD [Power supply unit with DALI interface]
Driver included	true [Yes]
Optical cover	AC-MLO [Acrylate micro-lens optic]
Emergency lighting	No [-]
Lighting control unit	No [-]
Dimmable	Yes [Yes]
Separate switching	No [-]
Fuse	No [-]
Connection	W [Plug-in connector 3-pole Wieland/Adels]
Safety class	CLI [Safety class I]
IP code	IP40 [Wire-protected]
IK code	IK02 [0.2 J standard]
Ambient temperature	+10 to +40°C [+10 to +40 °C]
Color	WH [White]
Protection foil	FL [Protection foil included]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	No [-]
European Community mark	CE [CE mark]
ENEC mark	ENEC [ENEC mark]
Lifetime to 70% luminous flux	50000 hr
Lifetime to 90% luminous flux	30000 hr
Failure rate at 5000 hrs	1 %

• Light technical

Color rendering index	80 [80]
Luminous flux	3500 Lm
Luminous efficacy	63 Lm/W

• Electrical

Power consumption	56 W [56 W]
Supply voltage	220-240 V [220 to 240 V]
Line frequency	50-60 Hz [50 to 60 Hz]
Control signal voltage	0-16 V [0-16 V DC DALI]

• Product Data

Order code	910502005503
Full product code	910502005503
Full product name	BBS560 LED35S/840 PSD AC-MLO W
Order product name	BBS560 LED35S/840 PSD AC-MLO W
Pieces per pack	0
Packs per outerbox	1
Bar code on outerbox - EAN3	8718291273172
Logistic code(s) - 12NC	910502005503

PHILIPS

Net weight per piece 7.200 kg

IP 40 IK 02 650°C F

Dimensional drawing

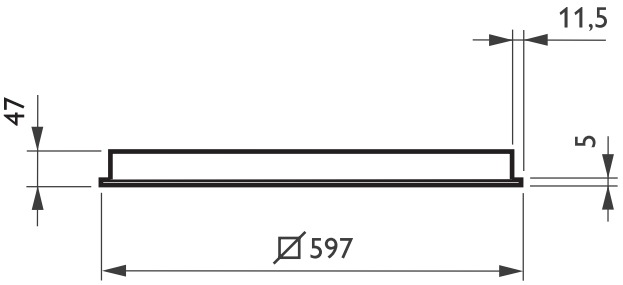

BBS560 LED35S/840 PSD AC-MLO W

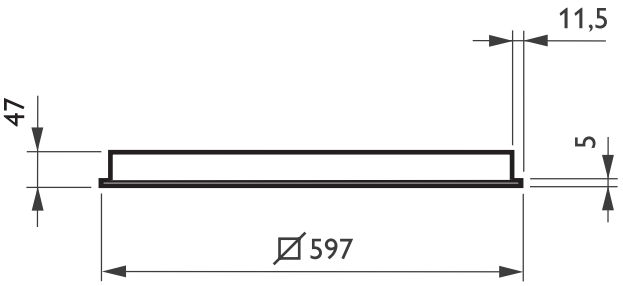

BBS560 LED35S/840 PSD AC-MLO W

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

SmartForm TBS460

ZBS460 SMB-PLC (1 set = 24PCS)



Ceiling mounting bracket for plaster ceiling

Product data

- General information

Product family code	ZBS460 [ZBS460]
Suspension accessories	SMB-PLC [Ceiling mounting bracket for plaster ceiling]
Packaging configuration	(24PCS) [24 pieces]

- Product Data

Order code	910403202503
Full product code	910403202503

Full product name	ZBS460 SMB-PLC (1 set = 24PCS)
Order product name	ZBS460 SMB-PLC (1 set = 24PCS)
Pieces per pack	1
Packs per outerbox	10
Bar code on pack - EAN1	8711559493053
Bar code on outerbox - EAN3	8711559493060
Logistic code(s) - 12NC	910403202503
Net weight per piece	0.110 kg

PHILIPS

SmartForm TBS460

ZBS460 SMB-PLC (1 set = 12PCS)



Ceiling mounting bracket for plaster ceiling

Product data

- General information

Product family code	ZBS460 [ZBS460]
Suspension accessories	SMB-PLC [Ceiling mounting bracket for plaster ceiling]
Packaging configuration	(12PCS) [12 pieces]

- Product Data

Order code	910403204103
Full product code	910403204103
Full product name	ZBS460 SMB-PLC (1 set = 12PCS)
Order product name	ZBS460 SMB-PLC (1 set = 12PCS)
Pieces per pack	1
Packs per outerbox	10
Bar code on pack - EAN1	8717943982707
Bar code on outerbox - EAN3	8717943982714
Logistic code(s) - 12NC	910403204103
Net weight per piece	0.060 kg

PHILIPS

SmartForm TBS461/471

ZBS461 SMB-PLC (1 set = 4PCS)



Ceiling mounting bracket for plaster ceiling

Brackets for plaster ceilings

Product data

- General information

Product family code	ZBS461 [ZBS461]
Suspension accessories	SMB-PLC [Ceiling mounting bracket for plaster ceiling]
Packaging configuration	(4PCS) [4 pieces]

- Product Data

Order code	910403203803
Full product code	910403203803
Full product name	ZBS461 SMB-PLC (1 set = 4PCS)
Order product name	ZBS461 SMB-PLC (1 set = 4PCS)
Pieces per pack	1
Packs per outerbox	25
Bar code on pack - EAN1	8727900641776
Bar code on outerbox - EAN3	8727900641783
Logistic code(s) - 12NC	910403203803
Net weight per piece	0.110 kg

PHILIPS

SmartForm TBS460

ZBS460 SMB-TPM (1 set = 4PCS)



Ceiling bracket for T-profile mounting

Product data

- General information

Product family code	ZBS460 [ZBS460]
Suspension accessories	SMB-TPM [Ceiling bracket for T-profile mounting]
Packaging configuration	(4PCS) [4 pieces]

- Product Data

Order code	910403202603
Full product code	910403202603
Full product name	ZBS460 SMB-TPM (1 set = 4PCS)
Order product name	ZBS460 SMB-TPM (1 set = 4PCS)
Pieces per pack	1
Packs per outerbox	50
Bar code on pack - EAN1	8711559493039
Bar code on outerbox - EAN3	8711559493046
Logistic code(s) - 12NC	910403202603
Net weight per piece	0.120 kg

PHILIPS

SmartForm TBS460

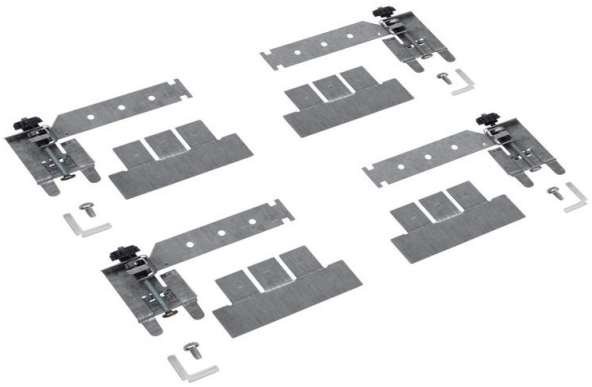

ZBS460 SMB (1 set = 4PCS)

Ceiling mounting bracket

Product data

- General information

Product family code	ZBS460 [ZBS460]
Suspension accessories	SMB [Ceiling mounting bracket]
Packaging configuration	(4PCS) [4 pieces]

- Product Data

Order code	910403202703
Full product code	910403202703
Full product name	ZBS460 SMB (1 set = 4PCS)
Order product name	ZBS460 SMB (1 set = 4PCS)
Pieces per pack	1
Packs per outerbox	25
Bar code on pack - EAN1	8711559493077
Bar code on outerbox - EAN3	8711559493084
Logistic code(s) - 12NC	910403202703
Net weight per piece	0.120 kg

PHILIPS