
T5 Fluorescent Bulkhead

- Weatherproof design suitable for indoor and outdoor applications.
- Fire Retardant (UL94) housing and UV stabilised Diffuser.
- Low heat generation, ensures longer and reliable service life.
- Low battery voltage cut-off with latch function, to eliminate battery over discharge.
- Charge LED indicator and test switch.



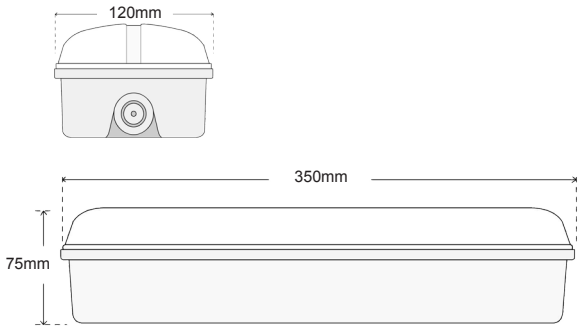

TECHNICAL SPECIFICATIONS

Model Number :	EL18NM/1A	EL28NM/1A
Mode of Operation :	Non maintained	
Lamp :	1 x 8W/T5 Fluorescent Lamp	2 x 8W/T5 Fluorescent Lamp
Rated Duration :	2 Hours (3 Hours on request)	
Mains Supply :	220-240 Volts	
Mains Frequency :	50-60Hz	
Power Consumption :	< 4.0W	
Battery :	High Temperature Nickel Cadmium	
Charger :	Variable rate, Short circuit protected	
Charge Monitor :	LED	
Degree of protection (Against dust and moisture)	IP54 (IP65 with Test Switch mounted internally)	
Test Facility :	Momentary test switch	
Safety Features :	Low battery voltage cut off to prevent over discharge	
Recharge Period :	< 24 Hours	
Fitting Construction :	Injection moulded with fire retardant (UL94), high impact material	
Weight :	Approximately 1.0 Kg	
Dimensions :	350mm (W) x 120mm (H) x 75mm (D)	
Standards / Compliance :	IEC 60598-2-22, SS 263 Part 2, SS 563	
Approvals :	PSB Type test, PSB PLS (Product Listing Scheme)	

F

IP65

CLASS I

TÜV SÜD

PSB Singapore

Type and batch tested with **PSB PLS-LISTED LABEL**

Note: Technical specifications subject to change without prior notice