

Box CCFL



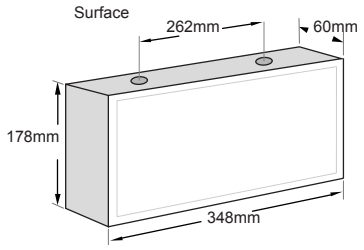

- Low power consumption CCFL meeting ISO safety colour requirements.
- Exceeds IEC 60598-2-22 and SS 563 brightness requirements.
- Low power consumption.
- High Quality, Long Life CCFL lamps.
- High efficiency charger and CCFL inverter.
- Low battery voltage cut-off with latch function, to eliminate battery over discharge.
- Charge indicator and test switch.

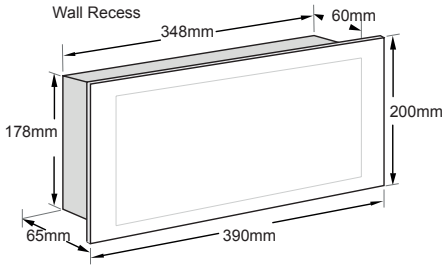

TECHNICAL SPECIFICATIONS

Model Number :	EXB-CCFL-M
Mode of Operation :	Maintained
Lamp :	1 x 4W Cold Cathode Fluorescent Lamp (CCFL) > 30,000 hours
Rated Duration :	1 Hour / 2 Hours
Mains Supply :	220-240 Volts
Mains Frequency :	50-60Hz
Power Consumption :	7W, (Total standby power inclusive of CCFL converter)
Battery :	High Temperature Nickel Cadmium
Charger :	Variable trickle rate
Charge Monitor :	LED
Test Facility :	Micro switch
Mounting :	Suspended / Surface ceiling / Surface wall
Safety Features :	Low battery voltage cut off to prevent over discharge
Recharge Period :	< 24 Hours
Diffuser :	Acrylic plate (Fire retardant)
Fitting Construction :	Electro galvanized steel. Epoxy powder coating for casing and gear tray
Weight :	Approximately 1.5 Kg
Dimensions :	Surface mount: 178mm (H) x 348mm (W) x 60mm (D), Recess mount: 180mm (H) x 350mm (W) x 60mm (D) ; 200mm (H) x 390mm (W) x 65mm (D)
Standards / Compliance :	IEC 60598-2-22, SS 263 Part 2, SS 563
Approvals :	TÜV SÜD PSB, PSB PLS (Product Listing Scheme)

F CLASS I

TÜV SÜD PSB Singapore

Type and batch tested with PSB PLS-LISTED LABEL

Ordering Guide:

Legend	Surface Mount	Recess Mount
	EXB-CCFL-M-S-RM	EXB-CCFL-M-LV-S-RM
	EXB-CCFL-M-SR-RM	EXB-CCFL-M-LV-SR-RM
	EXB-CCFL-M-SL-RM	EXB-CCFL-M-LV-SL-RM
EXIT	EXB-CCFL-M-S	EXB-CCFL-M-LV-S
EXIT	EXB-CCFL-M-SR	EXB-CCFL-M-LV-SR
EXIT	EXB-CCFL-M-SL	EXB-CCFL-M-LV-SL

Note: Technical specifications subject to change without prior notice