PowerCraft
Emergency Lighting Solutions


Surface LED

- Very wide spacing, double of traditional 10W halogen.
- Save up to 2/3 of the number of fittings used.
- Energy savings, extra low standby power consumption.






REL20NM-LED Cylinder

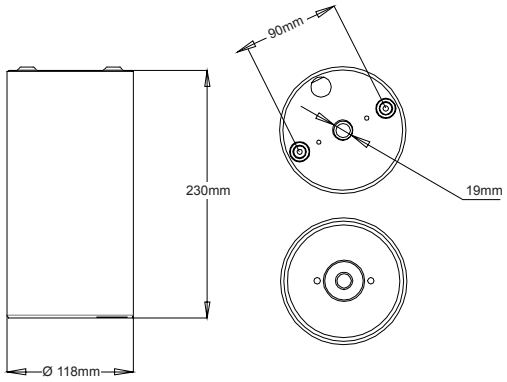

REL20NM-LED Gearbox

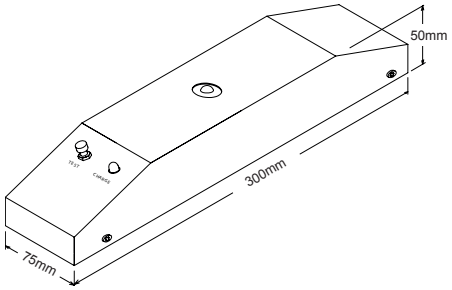

TECHNICAL SPECIFICATIONS

Model Number :	REL20NM-LED
Mode of Operation :	Non-Maintained
Lamp :	3.6V / White LED
Rated Duration :	2 Hours / 3 Hours
Mains Supply :	220-240 Volts
Mains Frequency :	50-60Hz
Power Consumption :	< 1.5W
Battery :	High Temperature Nickel Cadmium
Charger :	Regulated variable rate
Charge Monitor :	LED
Test Facility :	Momentary test switch
Safety Features :	Low battery voltage cut off to prevent over discharge
Recharge Period :	< 24 Hours
Fitting Construction :	Epoxy powder coated cold-rolled steel
Weight :	Approximately 1.2 kg
Standards / Compliance :	IEC 60598-2-22, SS 263 Part 2, SS 563
Approvals :	TÜV SÜD PSB, PSB PLS (Product Listing Scheme)

F CLASS I

TÜV SÜD PSB Singapore

Type and batch tested with PSB PLS-LISTED LABEL

Ordering Guide:

Ordering Code
REL20NM-LED-cylinder
REL20NM-LED-gearbox

Note: Technical specifications subject to change without prior notice