


Recess LED

- Very wide spacing, equivalent to 50W halogen.
- Energy savings, extra low standby power consumption.
- Suitable for high ceiling mounting.

Cutout

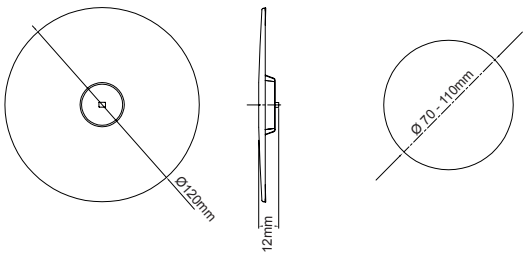

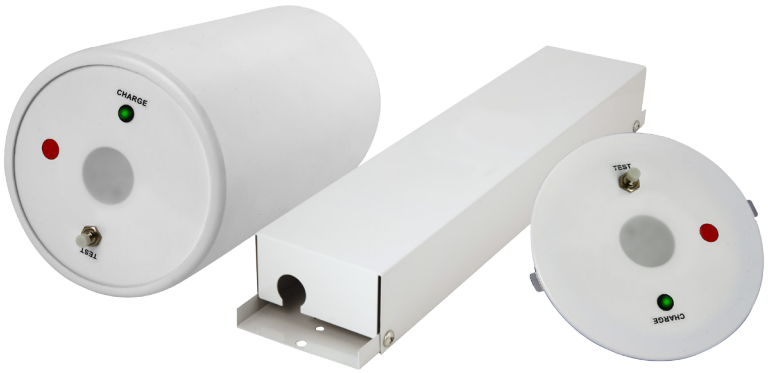

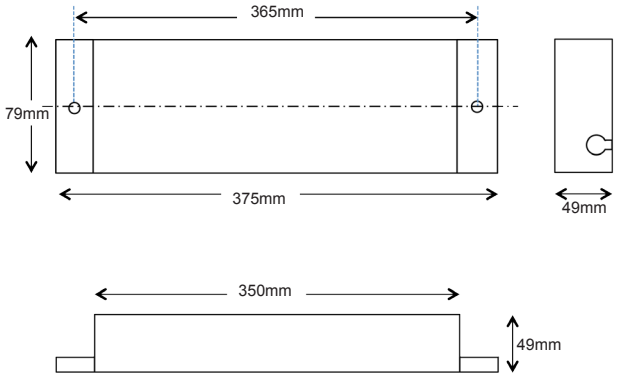

TECHNICAL SPECIFICATIONS

Model Number :	REL50NM-LED	REL50M-LED
Mode of Operation :	Non-Maintained	Maintained
Lamp :	50.4V / 0.2A / White LED	
Rated Duration :	2 Hours	
Mains Supply :	220-240 Volts	
Mains Frequency :	50-60Hz	
Power Consumption :	2.5W	12.5W
Battery :	High Temperature Nickel Cadmium	
Charger :	Regulated variable rate	
Charge Monitor :	LED	
Test Facility :	Micro switch	
Safety Features :	Low battery voltage cut off to prevent over discharge	
Recharge Period :	< 24 Hours	
Fitting Construction :	Aluminum epoxy powder coated reflector Steel (charger housing)	
Weight :	Approximately 1.3 kg	
Standards / Compliance :	IEC 61347-2-13, IEC 62384 ,SS 563	
Approvals :	TÜV SÜD PSB, PSB PLS (Product Listing Scheme)	

F

CLASS I

TÜV SUD
PSB Singapore

Type and batch tested with
PSB PLS-LISTED LABEL

Ordering Guide:

Ordering Code	
Non-Maintaned	Maintained
REL50NM-LED-120MM	REL50M-LED-120MM
REL50NM-LED-Cylinder	REL50M-LED-Cylinder

Note: Technical specifications subject to change without prior notice