MITSUBISHI ELECTRIC

Changes for the Better

Mitsubishi Electric Quality

VOTED BY CONSUMERS Reader's Digest TRUSTED BRAND 2015 GOLD 17TH ANNIVERSARY SINGAPORE

Past Awards
Reader's Digest SuperBrand & TrustedBrand (Asia or Singapore)
2003 – 2015

Mitsubishi Electric starMEX Air-Conditioner



The No.1 Specialist in Energy Saving

At the leading-edge of air conditioning technology

EXCELLENT Energy Savings

EASY To Clean! Reachable Inner Vent for Easy Clean

QUIETEST 19dB

SAVE R410A OZONE

Inverter Series
Mr.SLIM
R410A



Manufacturer of the World's First Wall-Mounted Split Air Conditioner*
*applying line flow fan

MITSUBISHI ELECTRIC

Your Life, Our Technology – The Comfort Connection.

As everyone knows, nothing compares to the comfort that nature has to provide. However, thanks to its many technical refinements, Mitsubishi Electric's air conditioners bring you closer to this ideal. Improved EER (Energy Efficiency Ratio) levels significantly reduce energy consumption while extremely quiet operation and the use of the Eco-friendly R410A refrigerant allow our series to create a naturally serene environment in every room of the house.



Technology and quality make the difference.

To create a better product that is friendly to both you and the environment, Mitsubishi Electric now utilises a new type of refrigerant called R410A. With an ozone depletion potential factor of zero, exceptionally non-toxicity, and chemically stable noninflammability, this refrigerant exemplifies the quality that our air conditioners have to offer.

Inverter Multi Split

Model	Refrigerant	Connectable Indoor Units	Page	Energy labelling scheme
MXY-3A28VA up to **3** indoor units 	DC Inverter, SAVE R410A OZONE	 MSY-GE10/13VA MSY-GE18VA	14	
MXY-4A28VA up to **4** indoor units 	DC Inverter, SAVE R410A OZONE	 MSY-GE24/26VA	14	
MXY-4A38VA up to **4** indoor units 	DC Inverter, SAVE R410A OZONE	 MSY-EF10/13/18VAB	23	
MXY-2E20VA up to **2** indoor units  **MXY-2E20VA can be connected to wall mount series only of up to cooling capacity of 3.5kW.*	DC Inverter, SAVE R410A OZONE	 MSY-GE10/13VA  MSY-EF10/13VAB	14 23	

Inverter Multi Split

Type

Model	Refrigerant	Connectable Indoor Units	Page	Energy labelling scheme
MXY-3A28VA up to **3** indoor units 	DC Inverter, SAVE R410A OZONE	 PLA-RP35/50/71BA	24	
MXY-4A38VA up to **4** indoor units 	DC Inverter, SAVE R410A OZONE	 MLZ-KA50VA	25	

Inverter Multi Split

Type

Model	Refrigerant	Connectable Indoor Units	Page	Energy labelling scheme
MXY-3A28VA up to **3** indoor units 	DC Inverter, SAVE R410A OZONE	 SEZ-KD35/50/71VAL	27	
MXY-4A38VA up to **4** indoor units 	DC Inverter, SAVE R410A OZONE	 PEAD-RP50/60/71JA(L)	26	

**PEAD-RP71JA(L) can be connected to MXY-4A38VA only.*
Total Indoor Running current must not exceed 3Amps when connecting to PEAD series.

Conversion formula: Btu/h=kW X 3412

MITSUBISHI ELECTRIC
Changes for the Better

Mitsubishi Electric starMEX Air-Conditioner

Inverter Single Split	Type		Connectable Indoor Units	Page	Energy labelling scheme
	Model	Refrigerant			
MUY-GE10VA 	DC Inverter	SAVE R410A OZONE	 MSY-GE10VA	14	
MUY-GE13VA 	DC Inverter	SAVE R410A OZONE	 MSY-GE13VA	14	
MUY-GE15VA 	DC Inverter	SAVE R410A OZONE	 MSY-GE15VA	14	
MUY-GE18VA 	DC Inverter	SAVE R410A OZONE	 MSY-GE18VA	14	
MUY-GE24VA 	DC Inverter	SAVE R410A OZONE	 MSY-GE24VA	14	

Inverter Single Split	Type		Connectable Indoor Units	Page	Energy labelling scheme
	Model	Refrigerant			
MUY-FL10VE 	DC Inverter	SAVE R410A OZONE	 MSY-FL10VE	13	

Inverter Multi Split	Type		Connectable Indoor Units	Page	Energy labelling scheme
	Model	Refrigerant			
MXY-3G28VA  up to **3** indoor units	DC Inverter	SAVE R410A OZONE	 MSXY-FJ05/07/10/13/18/24VE	21	
MXY-4G28VA  up to **4** indoor units	DC Inverter	SAVE R410A OZONE		21	
MXY-4G38VA  up to **4** indoor units	DC Inverter	SAVE R410A OZONE		21	
MXY-5G48VA  up to **5** indoor units	DC Inverter	SAVE R410A OZONE		21	
MXY-2G20VA  up to **2** indoor units	DC Inverter	SAVE R410A OZONE	 MSXY-FJ05/07/10/13VE	21	

Conversion formula: Btu/h=kW X 3412

MITSUBISHI ELECTRIC
Changes for the Better

Mr.SLIM Inverter Single Split	Type				
	Model	Refrigerant	Connectable Indoor Units	Page	Energy labelling scheme
SUY-KA18VA 	DC Inverter	SAVE R410A OZONE	PLY-P18BA 	28	
			PCY-P18KA 	30	
			PEY-P18JA 	29	
SUY-KA24VA 	DC Inverter	SAVE R410A OZONE	PLY-P24BA 	28	
			PCY-P24KA 	30	
			PEY-P24JA 	29	
SUY-KA30VA 	DC Inverter	SAVE R410A OZONE	PLY-P30BA 	28	
			PCY-P30KA 	30	
			PEY-P30JA 	29	
SUY-KA36VA 	DC Inverter	SAVE R410A OZONE	PLY-P36BA 	28	
			PCY-P36KA 	30	
			PEY-P36JA 	29	
PUY-P42VKA 	DC Inverter	SAVE R410A OZONE	PLY-P42BA 	28	
			PCY-P42KA 	30	
			PEY-P42JA 	29	

Conversion formula: Btu/h=kW X 3412

MITSUBISHI ELECTRIC
Changes for the Better

starMEX Plus series	Type				
	Model	Refrigerant	Connectable Indoor Units	Page	Energy labelling scheme
MXY-4C100VA 	DC Inverter	SAVE R410A OZONE	MSXY - FJ05VE 	31	
			MSXY - FJ07VE 		
MXY-5C125VA 			MSXY-FJ10VE 		
			MSXY-FJ13VE 		
			MSXY-FJ18VE 		
MXY-6C140VA 			MSXY-FJ24VE 		
			PEFY-P VMA(L)-E 		

Conversion formula: Btu/h=kW X 3412

EASY CLEAN

Safety system stops the machine when the horizontal vane is removed.

THE WIDE AIR OUTLET MAKES CLEANING EASY, ALWAYS KEEPING THE AIR IN YOUR ROOM

CLEAN AND FRESH.



EASY CLEAN's unique cleaning system

Open the blower outlet for cleaning




Vertical vanes


Front panel


Fan

The entire front panel can be washed


Easy removal


Scrub clean

Thorough cleaning keeps your home healthier and more comfortable.

Eliminates odours
Always bringing you fresh air

Prevents mould
The mould guard (internal drier) always keeps the inside unit clean

Longer lasting high performance
Consistent performance from time of purchase

Economical energy costs
Cleaning the fan (25%), the heat exchanger (5%) and the filter (15%) increases energy savings by a total of up to 45%!

Mitsubishi Electric's Main Technology

Easy, Clean & Comfortable

Easy Clean Design

The easily detachable panel is a snap to wash and the airflow vents can be opened without any special tools for quick cleaning of the inside of the air conditioner. It is recommended that the air conditioner be cleaned regularly as this will increase both operating efficiency and energy-savings. Always clean the heat exchanger, fan and air vent to ensure proper performance and economical operation. It reduces your electricity bill by approx. 45%*.

*Electricity bill comparison of operation under fixed temperature with 8 grams of soil on the fan and one without. Based on internal company data.

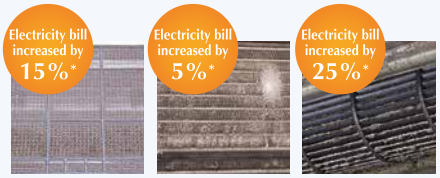

Filter | Heat exchanger | Fan



EASY CLEAN

Easy Cleaning Procedure



1 First, turn off the power. Make sure the fan is not operating before this removal procedure. Unlock every green stopper of the upper horizontal vane and pull it towards the left to remove. Do the same thing to remove the lower horizontal vane. Safety system stops the blower when the horizontal vane is removed. 2 You can reach deep into the air-conditioner, in order to clean fans and other parts that are normally hard-to-reach. 3 Hold the central green handle and pull towards body to open.

Electrosatatic Anti-Allergy Enzyme Filter

The filter is charged with static electricity, enable it to trap allergens such as molds and bacteria and decompose them using enzymes retained in the filter.

Anti-Allergy Enzyme Filter

To counter allergens, we have added filters featuring artificial blue enzymes with the power to remove harmful microbes such as bacteria*1, virus*2, dust mites*3, pollen*3, etc.

The enzymes destroy any germs caught in the filter, preventing them from working their way further inside the air conditioner. However, being artificial enzymes, they prevent allergies while remaining gentle on the human body.

(Confirmed by *1 Japan Spinners Inspecting Foundation test No. 007715-1,2 *2 Japan Food Research Laboratories Ref. No.20491448-002 *3 Shinshu University)



ANTI-ALLERGY ENZYME FILTER

Anti-Allergy Enzyme filter mechanism

1. Artificial enzyme (meta-phthalocyanine) catalysts on the filament catch allergens.
2. The artificial enzyme catalysts aid the chemical reaction with oxygen and sever the S-S bonds.
3. Once the S-S bonds are severed, the proteins no longer act as allergens.

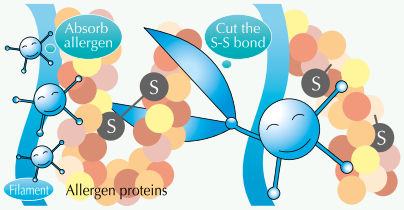

Allergen protein (such as mites) → *Transformed protein (Non-allergen proteins)*

Catechin Plus Air Purifying System

The Catechin offers many benefits through its deodorizing, anti-bacterial and anti-virus properties. These benefits can be experienced fully with our long-lasting Hybrid Catechin Pre-filter. At the same time, dust collection efficiency is doubled with our Double Air Cleaning Filter.

The filter can be easily removed and when washed regularly, deodorizing effectiveness should last for more than 10 years.



Catechin plus Air Purifying Systems

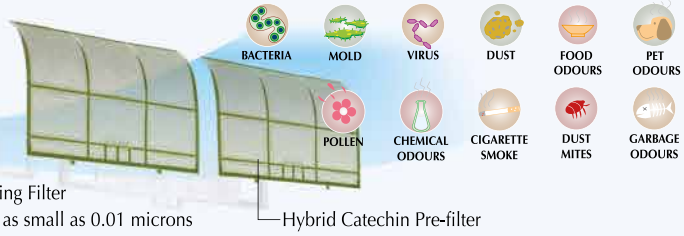

Double Air Cleaning Filter removes particles as small as 0.01 microns

Hybrid Catechin Pre-filter

Not every feature detailed on these two pages is available on every product in this brochure. Please refer to individual product information pages for precise specifications.

Nano Platinum Filter

The filter has a large capture area and incorporates nanometre-sized platinum-ceramic particles that work to kill bacteria and deodourise the circulating air. Better dust collection than conventional filters is also ensured.

Fuzzy Logic "I Feel"

Is the room too hot or cold, too dry or humid? On auto mode selection, the fuzzy logic control system adjusts conditions to suit you. Your selected temperature setting is stored in the memory system and reproduced automatically each time you operate your air conditioning.

Wide & Long Airflow

Bringing extra comfort to your life, left-right vane can be automatically controlled by remote controller. Simply use of Wide-vane mode, you can easily adjust direction of airflow to reach any corner of the room. The high-power motor combines with a newly designed "Long mode" to push air out further, providing an extended airflow that can reach the far end of long living rooms or reach the kitchen in open-concept living areas and studios. When operating in Long mode, the airflow can be extended as far as 12m.

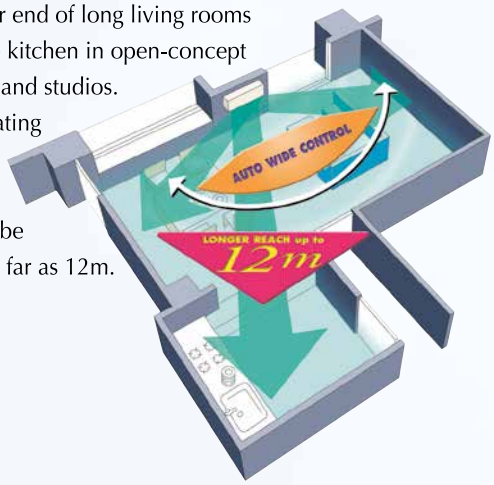

WiDE & LONG

Improved efficiency with 7-way airflow



By combining the use of the Wide-vane mode and Long and vane mode, you can adjust airflow horizontal 7 directions and vertical 6 directions. Exclusive to Mitsubishi Electric, this advantage ensures maximum control over air direction and flow up to 42 ways, which guarantee that the air conditioning effect isn't wasted, where it isn't needed.

Auto Mode

We offer you an easy way to comfort with auto mode. "Auto vane" is created to set the vane angle automatically. "Auto fan" is created to adjust airflow speed automatically. These could let ideal temperature to be achieved in the shortest amount of time.

Anti-Rust Treatment

Every cabinet of the outdoor unit has been applied with a special anti-rust treatment.

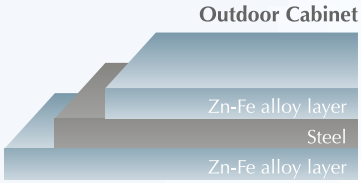

LCD Remote Control

From temperature and operation modes to air volume and direction, you'll be able to customise your environment at the touch of a button. Large, easy-to-identify buttons allow for easy access to frequently used functions. The generous LCD display lets you check temperature and other operating conditions at a glance, while an easy-open slide cover prevents inadvertent operation of preset controls and other functions.

Luminous Buttons

The remote controller features luminous buttons that make use easy even in the dark environment.





Mitsubishi Electric's Main Technology

Silent Operation Technology & Multi-System

Only 19 dB The Quietest Air Conditioner In The Market

Noise level during silent mode operation is only **19dB** for the MSY-GE10VA, making it the quietest indoor unit in the market. Inside the unit, the multi-angled heat exchanger has a modified fin shape that reduces air resistance for a smoother, quieter airflow. The wide fan diameter produces greater airflow at lower fan speeds and the uneven pitch between each fan blade helps to eliminate annoying noise. What's more, the remote controlled vane significantly decreases downward air resistance for much lower noise levels.

Super Quiet Operation only 19db

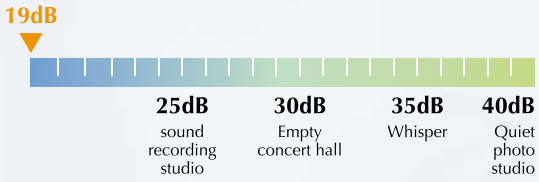

Twin Rotary Compressor Ensures Peace And Quiet

Unlike conventional models with a single rotary, all Inverter Multi Split System MXY Series outdoor units feature a twin-rotary compressor that provides balanced rotation as the centrifugal force of one roller is counterbalanced by the other. This significantly reduces both vibration and noise. This is why Mitsubishi Electric's outdoor units are so peacefully quiet.

Comparison of outdoor unit noise levels dB(A)

Outdoor unit	MXY-4A28VA	MUX-4BD26VB
Cooling	45	52

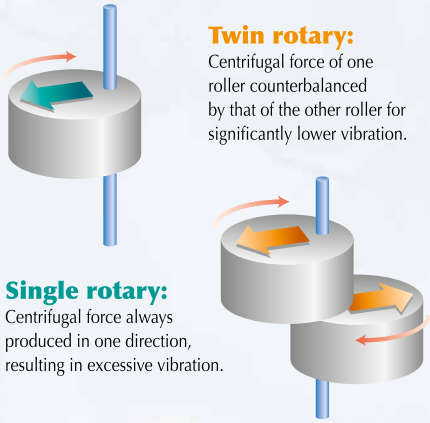

Twin rotary:
Centrifugal force of one roller counterbalanced by that of the other roller for significantly lower vibration.

Single rotary:
Centrifugal force always produced in one direction, resulting in excessive vibration.

Multi-Split System The Convenient Way To Enhance Any Interior

Mitsubishi Electric Multi-split system could be the best solution balancing use of available space, exotic interior and money. With the system's innovative design, several indoor units could be mixed and matched and connected to a single outdoor unit as a customized system. It's your choice to add indoor units at any time more economically while facilitating installation.



Mitsubishi Electric starMEX Air-Conditioner

Mitsubishi Electric's Main Technology

Cleaning-Free, Pipe Reuse Technology

It is a fact that the world's ozone layer is being depleted.

Many scientists believe that refrigerants that contain hydrochlorofluorocarbons such as HCFC-R22 with chlorine are a contributing factor to this problem. R410A – a chlorine-free, non-inflammable, environmentally friendly and energy efficient refrigerant offers a new alternative. In addition to the properties just mentioned, R410A is as easy to handle as the environmentally unfriendly R22 because of its pseudoazeotropic characteristics. R410A is also highly efficient and provides the same level of performance as R22.

SAVE R410A OZONE

	Composition	Ozone depletion potential factor*	Toxicity	Stability
NEW REFRIGERANT R410A	Non-uniform boiling point composite refrigerant (HFC:R32/R125=50:50WT%)	0	NON	GOOD
CURRENT REFRIGERANT R22	Single component refrigerant (HCFC:R22=100WT%)	0.05	NON	GOOD

* Relative value when CFC is considered as 1

Mitsubishi Electric's Cleaning-Free Technology

Our R410A Inverter-driven models are the first in the industry to use hard alkyl benzene (HAB) oil — a unique refrigerant oil that degrades very slowly — for refrigeration. Employing our exclusive cleaning-free technologies such as a specially developed high-efficiency oil separator and optimum distribution of heat exchangers to prevent oil stagnation, we have made it possible to reuse previously installed R22 pipeworks.



ORIGINAL HAB Oil	ORDINARY ESTER Oil
• No special cleaning required • Re-use existing pipes • Cleaning / Purging process • Special tools (Oil trap kit) • Higher working pressure	• Formation of Sludge • Clogging • Premature breakdown of equipment • Strip and replace existing R22 pipes

1st in the Industry!

Mitsubishi Electric's original HAB oil — Ordinary ester oil



Refrigerant circuit lasts longer with less deterioration using the new HAB refrigerant oil.*

*Data taken from our lab: Test results equivalent to 10 years worth of use

QUESTION: *In general, why is the reuse of existing R22 pipeworknot allowed for models with R410A HFC refrigerant?*

ANSWER: *This is because existing R22 pipework contains moisture and chloride residue that, when mixed with compressor's ester oil, can result in a chemical reaction. Additionally, refrigerant oil sludge and corrosion within the compressor can clog up the refrigerant circuit.*

MITSUBISHI ELECTRIC'S SOLUTION:

FLUSH, VACUUM & INSTALL!

Mitsubishi Electric's exclusive cleaning-free, Pipe-reuse technology allows you to reuse existing R22 refrigeration piping even when installing a new R410A model.

Not every feature detailed on these two pages is available on every product in this brochure. Please refer to individual product information pages for precise specifications.

Mitsubishi Electric's Main Technology

Inverter & Energy Saving Technology

Inverter Control Technology

By controlling current frequency according to the desired temperature setting and outside air-conditions, energy-efficient performance is assured. Frequency is lowered when less power is required to substantially reduce electricity consumption for more economical operation. Providing you with more economy and comfort throughout the year, inverter control presents an ideal situation as it reduces compressor rotation speed when air-conditioning load is low so it's like using a small compressor with a large heat-exchanger.

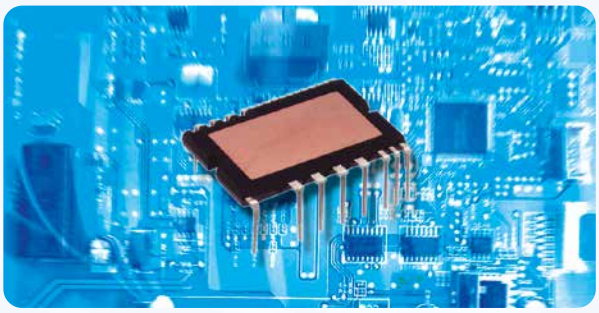

Optimum comfort year-round

To ensure that a room is never too cold or too hot, inverter technology allows the air conditioner to detect subtle fluctuations in room temperature and adjust automatically. Unlike conventional air conditioning units that must start or stop repetitively, inverter units offer finely tuned operation – such as the accurate control of compressor rotation – for a more comforting airflow and far less temperature variations.

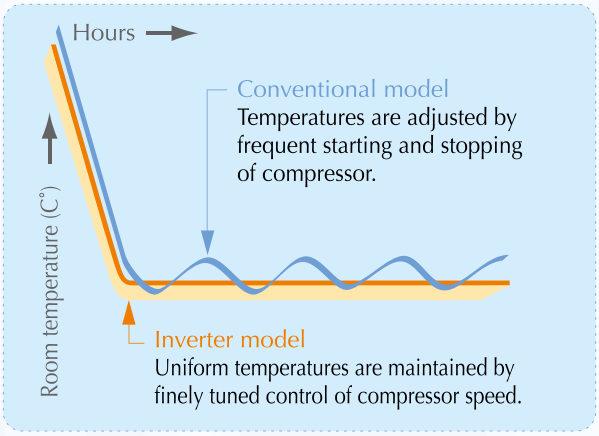

NEW DC Inverter

DC Inverter DC Inverter

A high-efficiency DC motor drives the fan of the outdoor unit. It offers up to 60% greater efficiency than an equivalent AC motor.



Joint Wrap DC Motor

Mitsubishi Electric's newly developed, unique Joint Wrap Motor is environmentally friendly, using less copper wiring than conventional motors through the employment of joint wrap production techniques. This concentrated winding DC Motor (linked core type) features our original high density, concentrated winding technique for a reliable, highly efficient motor.



PAM Control PAM (Pulse Amplitude Modulation)

Electricity can be used efficiently with less loss, the current wave resembles the supply voltage wave. PAM is a method for controlling the form of the current wave so that it conforms to the supply voltage wave. With PAM control, 98% of input power supply is effectively used.

without PAM Control



with PAM Control



PAM adjusts the form of current wave so that it is close to that of the supply voltage wave. High harmonics are reduced and 98% of the electricity is utilized.

High-speed cooling

Our advanced Inverter technology enables efficient high-speed cooling by precisely and flexibly controlling the rotation of the compressor according to your cooling needs. For example, during summer months, the compressor speed is automatically set at a maximum level that is 30% faster than non-inverter models. So your room takes even less time to be cool.

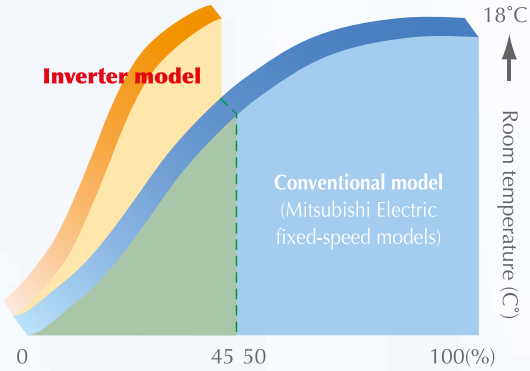

Compared to conventional models, desired temperatures are reached much more rapidly.

Using a Motorcycle as an Example

Power increased
Efficient increase of voltage for increased power

Significant energy savings
Electricity loss reduced for surprising energy savings



Energy savings is limited
Fuel is wasted

Power is limited
Power is insufficient for steep hills

**This diagram illustrates the merits of PAM Control.*

Econo Cool – smart save

The Econo Cool one touch operation automatically adjusts the direction of airflow based on the temperature at the air outlet. The set temperature can therefore be 2 ºC above conventional temperature settings without loss of comfort and with a 20% increase in energy efficiency.
Ensures greater comfort even when the temperature setting is 2 ºC above conventional settings.

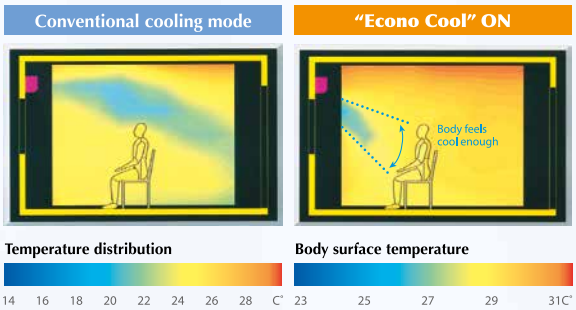

Ensures more comfort even when the set temperature is 2˚C higher than the conventional cooling mode.

	Conventional	Econo Cool
Ambient temperature	35˚C	35˚C
Set temperature	25˚C	27˚C
Perceived temperature	30˚C	**29.3˚C**

New LEV Control



LEV (Linear Expansion Valve) control automatically adjusts the volume of refrigerant flowing through the air conditioner according to air conditioning load. When the load is low, Needle A drops, restricting the flow path and decreasing the volume of refrigerant. In this simple yet effective concept, circulation of refrigerant is optimized to facilitate more economical operation.

Not every feature detailed on these two pages is available on every product in this brochure.
Please refer to individual product information pages for precise specifications.

Inverter Single Split System

SAVE R410A OZONE

Mitsubishi Electric starMEX Air-Conditioner

Our Inverter Technology adjusts capacity in response to conditions such as the difference between the outside and inside air temperatures, allowing our air conditioners to run more efficiently and reduce energy costs.



MSY Series

Indoor Unit





Luminous Buttons

Dimensions (W X D X H) : 798 X 232 X 295 mm

MSY-GE10VA
Cooling capacity: 2.5kW*

MSY-GE13VA
Cooling capacity: 3.5kW*

MSY-GE15VA
Cooling capacity: 4.2kW*

MSY-GE18VA
Cooling capacity: 4.8kW*





Luminous Buttons

Dimensions (W X D X H) : 1100 X 238 X 325 mm

MSY-GE24VA
Cooling capacity: 6.6kW*

EASY CLEAN | ANTI-ALLERGY ENZYME FILTER | Catechin Filter | SAVE R410A OZONE | Cleaning-free, pipe reuse

DC Inverter | PAM Control | Only 19dB (MSY-GE10/13VA) | Quiet | Anti-Allergy Enzyme | Electrostatic Anti-allergy (MSY-GE10/13/15/18VA) | Catechin (MSY-GE10/13/15/18VA) | Nano Platinum | EASYCLEAN | Econo Cool | Fuzzy I FEEL | 24

Auto Restart | (MSY-GE24VA) | Self Diagnosis | i SMART (MSY-GE10/13/15/18VA) | i SAVE (MSY-GE24VA) | NEW LEV | COOL (MSY-GE24VA) | Wide (MSY-GE24VA) | Long (MSY-GE24VA) | AUTO

Outdoor Unit



MUY-GE10/13/15VA
Dimensions (W X D X H) :
800 X 285 X 550 mm



MUY-GE18VA
Dimensions (W X D X H) :
840 X 330 X 850 mm



MUY-GE24VA
Dimensions (W X D X H) :
840 X 330 X 880 mm

(Optional drainage kit is available for CU)

Inverter Single Split system MSY-GE series

Model			EASY CLEAN, WIDE & LONG				
Indoor			MSY-GE10VA	MSY-GE13VA	MSY-GE15VA	MSY-GE18VA	MSY-GE24VA
Outdoor			MUY-GE10VA	MUY-GE13VA	MUY-GE15VA	MUY-GE18VA	MUY-GE24VA
Function & type			Cooling, Wall-mounted				
Capacity (Min-Max)		kW	2.50 (1.1-3.5)	3.50 (1.4-3.9)	4.20 (0.9-4.8)	4.80 (1.4-5.4)	6.60 (2.4-8.7)
Total power input		kW	0.64	1.02	1.25	1.43	1.83
Full load COP			4.56	3.58	3.44	3.43	3.82
Weighted COP**			5.8	4.61	4.51	4.53	4.83
Starting current		A	3.30	4.70	5.70	6.40	8.20
Running current		A	3.30	4.70	5.70	6.40	8.20
Airflow (High)		CMM(m³/min)	11.4	12.8	14.2	15.1	20.7#
Dimension	Indoor	mm	798 X 232 X 295				1100 X 238 X 325
(W x D x H)	Outdoor	mm	800 X 285 X 550			840 X 330 X 850	840 X 330 X 880
Net weight	Indoor	kg	10	10	10	10	16
	Outdoor	kg	30	30	36	54	53
*Sound level (Silent - High)	Indoor	dB(A)	19-40	19-45	26-48	28-49	30-53#
	Outdoor	dB(A)	46	47	50	54	55
Connection method	Indoor/Outdoor		Flared				
Dehumidification		l/h	0.30	0.80	1.20	1.60	1.80
External Piping Diameter	Gas (ø)	mm	9.52	9.52	9.52	12.70	15.88
	Liquid (ø)	mm	6.35	6.35	6.35	6.35	9.52
Max. length		m	20	20	20	30	30
Max. height		m	12	12	12	15	15
Power supply		V, Phase, Hz	230, 1, 50				
Energy labelling scheme							

*Note: Sound level is measured in anechoic chambers. ** Tested based on NEA energy labelling scheme.
#Super high + long + powerful mode

Conversion formula: Btu/h=kW x 3412

Inverter Single Split System

SAVE R410A OZONE

Mitsubishi Electric starMEX Air-Conditioner

The F Series is designed for optimum cooling performance as well as operational comfort. Quiet, energy-saving operation is supported by some of Mitsubishi Electric's latest technologies. Advanced funtions such as "3D i-see Sensor" temperature control and the Plasma Quad air purification system raise room comfort levels to new heights



MSY Series

Indoor Unit



Dimensions (W X D X H) : 925 x 234 x 305 mm

MSY-FL10VE

Cooling capacity: 2.75kW*

Outdoor Unit



MUY-FL10VE

Dimensions (W X D X H) :
800 x 285 x 550 mm

(Optional drainage kit is available for CU)

SAVE R410A OZONE · Cleaning-free, pipe reuse · DC Inverter · PAM Control · Econo Cool · 24 · Weekly Timer · Self Diagnosis · AUTO · 3D i-see sensor · Plasma Quad

Inverter Single Split system MSY-FL series

Model			EASY CLEAN, WIDE & LONG
Indoor			MSY-FL10VE
Outdoor			MUY-FL10VE
Function & type			Cooling, Wall-mounted
Capacity (Min-Max)		kW	2.75 (1.4-3.5)
Total power input		kW	0.56
Full load COP			4.91
Weighted COP**			5.88
Starting current		A	2.9
Running current		A	2.9
Airflow		CMM(m³/min)	11.6
Dimension (W x D x H)	Indoor	mm	925 x 234 x 305
	Outdoor	mm	800 x 285 x 550
Net weight	Indoor	kg	13.5
	Outdoor	kg	37
*Noise level (Silent - High)	Indoor	dB(A)	20-42
	Outdoor	dB(A)	47
Connection method	Indoor/Outdoor		Flared
Dehumidification		l/h	0.2
External Piping Diameter	Gas (ø)	mm	9.52
	Liquid (ø)	mm	6.35
Max. length		m	20
Max. height		m	12
Power supply		V, Phase, Hz	230, 1, 50
Energy labelling scheme *Super high + long + powerful mode			

*Note: Noise level is measured in anechoic chambers. ** Tested based on NEA energy labelling scheme.
#Super high + long + powerful mode

Conversion formula: Btu/h=kW x 3412

Inverter Multi Split System



Our Inverter Technology adjusts capacity in response to conditions such as the difference between the outside and inside air temperatures, allowing our air conditioners to run more efficiently and reduce energy costs. With capacity ranging from 2.5 kW to 7.1 kW, you can mix and match units to build a customized air conditioning system that is just right for your home. We are the Good Choice for comfortable living.

MXY Series

Indoor Unit





Luminous Buttons

Dimensions (W X D X H) : 798 X 232 X 295 mm

MSY-GE10VA
Cooling capacity: 2.5kW*

MSY-GE13VA
Cooling capacity: 3.5kW*

MSY-GE18VA
Cooling capacity: 5.0kW*

EASY CLEAN · ANTI-ALLERGY ENZYME FILTER · Catechin plus Air Purifying Systems · SAVE R410A OZONE · Cleaning-free, pipe reuse

DC Inverter · PAM Control · Only 19dB · Anti-Allergy Enzyme · Catechin · EASYCLEAN · Econo Cool · Fuzzy FEEL

24 · Auto Restart · Self Diagnosis · i SMART

Quiet · AUTO · NEW LEV





Luminous Buttons

(MSY-GE24VA)



(MSY-GE26VA)

Dimensions (W X D X H) : 1,100 X 238 X 325 mm

MSY-GE24VA
Cooling capacity: 6.0kW*

MSY-GE26VA
Cooling capacity: 7.1kW*

EASY CLEAN WiDE & LONG · ANTI-ALLERGY ENZYME FILTER · SAVE R410A OZONE · Cleaning-free, pipe reuse

DC Inverter · PAM Control · Quiet · Electrostatic Anti-allergy · Nano Platinum · Wide · Long · Econo Cool · Fuzzy FEEL

AUTO · 24 (Weekly Timer) · Auto Restart

Self Diagnosis · EASYCLEAN · COOL · i SAVE · NEW LEV

Outdoor Unit

System 3

3 Rooms **MXY-3A28VA** Outdoor unit 1:3 Indoor units
Total capacity of all indoor units must not exceed 14.6kW.

Certain unit combinations are not compatible. Please refer to the configuration pattern charts on the page 15-18 for more details.

(Optional drainage kit is available)



MXY-3A28VA
Dimensions (W X D X H) :
840 X 330 X 710 mm



System 4

4 Rooms **MXY-4A28VA** Outdoor unit 1:4 Indoor units
Total capacity of all indoor units must not exceed 15.6kW.

Certain unit combinations are not compatible. Please refer to the configuration pattern charts on the page 15-18 for more details.

(Optional drainage kit is available)



MXY-4A28VA
Dimensions (W X D X H) :
840 X 330 X 710 mm



Room D



or



Conversion formula: Btu/h=kW x 3412 *With single unit operation

Indoor Unit



Dimensions (W X D X H) : 798 X 232 X 295 mm



Luminous Buttons

MSY-GE10VA
Cooling capacity: 2.5kW*

MSY-GE13VA
Cooling capacity: 3.5kW*

MSY-GE18VA
Cooling capacity: 5.0kW*

EASY CLEAN · ANTI-ALLERGY ENZYME FILTER · Catechin PLUS Air Purifying Systems · SAVE R410A OZONE · Cleaning-free, pipe reuse

DC Inverter · PAM Control · Only 19dB · Anti-Allergy Enzyme · Catechin · EASYCLEAN · Econo Cool · Fuzzy FEEL

Auto Restart · 24 · Self Diagnosis · i SMART

Quiet · AUTO · NEW LEV



Dimensions (W X D X H) : 1,100 X 238 X 325 mm



Luminous Buttons

(MSY-GE24VA)



(MSY-GE26VA)

MSY-GE24VA
Cooling capacity: 6.0kW*

MSY-GE26VA
Cooling capacity: 7.1kW*

EASY CLEAN WiDE & LONG · ANTI-ALLERGY ENZYME FILTER · SAVE R410A OZONE · Cleaning-free, pipe reuse

DC Inverter · PAM Control · Quiet · Electrostatic Anti-allergy · Nano Platinum · Wide · Long · Econo Cool · Fuzzy FEEL · AUTO · 24 · Weekly Timer

Auto Restart · Self Diagnosis · EASYCLEAN · COOL · i SAVE · NEW LEV



Dimensions (W X D X H) : 798 X 232 X 295 mm



Luminous Buttons

MSY-GE10VA
Cooling capacity: 2.5kW*

MSY-GE13VA
Cooling capacity: 3.5kW*

EASY CLEAN · ANTI-ALLERGY ENZYME FILTER · Catechin PLUS Air Purifying Systems · SAVE R410A OZONE · Cleaning-free, pipe reuse

DC Inverter · PAM Control · Only 19dB · Anti-Allergy Enzyme · Catechin · EASYCLEAN · Econo Cool · Fuzzy FEEL

Auto Restart · 24 · Self Diagnosis · i SMART

Quiet · AUTO · NEW LEV

Outdoor Unit

System 4

4 Rooms **MXY-4A38VA** Outdoor unit 1:4 Indoor units
Total capacity of all indoor units must not exceed 16.5kW.

Certain unit combinations are not compatible. Please refer to the configuration pattern charts on the page 15-18 for more details.

(Optional drainage kit is available)



MXY-4A38VA
Dimensions (W X D X H) :
900 X 320 X 900 mm
(+35)

System 2

2 Rooms **MXY-2E20VA** Outdoor unit 1:2 Indoor units
Total capacity of all indoor units must not exceed 7.0kW.

Certain unit combinations are not compatible. Please refer to the configuration pattern charts on the page 15-18 for more details.

(Optional drainage kit is available)



MXY-2E20VA
Dimensions (W X D X H) :
800 X 285 X 550 mm



Mitsubishi Electric starMEX Air-Conditioner

Inverter Multi Split system MXY series

Model				EASY CLEAN, WIDE & LONG			
Outdoor				MXY-3A28VA	MXY-4A28VA	MXY-4A38VA	MXY-2E20VA
Indoor				MSY-GE10VA / MSY-GE13VA / MSY-GE18VA / MSY-GE24VA / MSY-GE26VA			MSY-GE10VA / MSY-GE13VA
No. of connectable indoor units (System)				3	4	4	2
Function & type				Cooling, Wall-mounted			
Capacity			kW	Please refer to the chart on pages 15-18			
Power input			kW				
Full load COP				3.36	3.44	3.63	3.77
Weighted COP**				4.45	4.42	4.57	4.87
Max Running current (Indoor only)			A	MSY-GE10VA : 0.22 / MSY-GE13VA : 0.29 / MSY-GE18VA : 0.39 / MSY-GE24/26VA : 0.55			
Airflow (High)			CMM(m³/min)	MSY-GE10VA :11.4 / MSY-GE13VA : 12.8 / MSY-GE18VA : 15.1 / MSY-GE24/26VA : 20.7#			
Dimension (W x D x H)		Indoor	mm	MSY-GE10/13/18VA : 798 X 232 X 295 / MSY-GE24/26VA : 1,100 X 238 X 325			798 X 232 X 295
		Outdoor	mm	840 X 330 X 710		900 X 320(+35) X 900	800 X 285 X 550
Net weight		Indoor	kg	MSY-GE10/13/18VA :10 / MSY-GE24/26VA : 16			MSY-GE10/13VA : 10
		Outdoor	kg	57	58	67	40
*Sound level (Silent - High)		Indoor	dB(A)	MSY-GE10VA : (19-40) / MSY-GE13VA : (19-45) / MSY-GE18VA : (28-49) MSY-GE24/26VA : (30-53#)			MSY-GE10VA : (19-40) MSY-GE13VA : (19-45)
		Outdoor	dB(A)	49	49	46	49
Connection method		Indoor/Outdoor		Flared			
External piping	Diameter	Gas (ø)	mm	MSY-GE10/13VA : 9.52 / MSY-GE18VA : 12.70 / MSY-GE24/26VA : 15.88			MSY-GE10/13VA : 9.52
		Liquid (ø)	mm	MSY-GE10/13/18VA : 6.35 / MSY-GE24/26VA : 9.52			MSY-GE10/13VA : 6.35
	Max. length	Total - Each	m	60 - 25	60 - 25	70 - 25	30 - 20
	Max. height		m	15			
Power supply			V, Phase, Hz	230, 1, 50			
Energy labelling scheme							

*Note: Sound level is measured in anechoic chambers. ** Tested based on NEA energy labelling scheme.
#Super high + long + powerful mode

Specifications

Type		Name	Rated Capacity (kW)	Max Running Current (A)	Fan speed	Airflow (High) (m³/min)	Sound level (dB(A))	Dimensions (WxDxH)	Net weight (Kg)	Pipe size (mm)	Remote controller	External static pressure
Ceiling cassette	PLA-RP	PLA-RP35BA	3.5	0.22	4 steps	15.0	27-31	840 x 840 x 258	28	6.35 / 12.70	Wireless(S) / Wired(O)	-
		PLA-RP50BA	5.0	0.36	4 steps	18.0	28-32	840 x 840 x 258	28	6.35 / 12.70	Wireless(S) / Wired(O)	-
		PLA-RP71BA	7.1	0.51	4 steps	21.0	28-34	840 x 840 x 258	29	9.52 / 15.88	Wireless(S) / Wired(O)	-
Ceiling Cassette	MLZ	MLZ-KA50VA	5.0	0.30	3 steps	11.4	34-43	1102 x 360 x 175	18.5	6.35 / 12.70	Wireless(S)	-
Compact ceiling concealed	SEZ-KD	SEZ-KD35VAL	3.5	0.46	4 steps	11.0	23-33	900 x 700 x 200	21	6.35 / 9.52	Wireless(S) / Wired(O)	5/15/35/50
		SEZ-KD50VAL	5.0	0.63	4 steps	15.0	30-37	900 x 700 x 200	23	6.35 / 12.70	Wireless(S) / Wired(O)	5/15/35/50
		SEZ-KD71VAL	7.1	0.84	4 steps	20.0	30-40	1100 x 700 x 200	27	9.52 / 15.88	Wireless(S) / Wired(O)	5/15/35/50
Ceiling concealed	PEAD-RP	PEAD-RP50JA(L)	5.0	1.39	3 steps	17.0	26-35	900 x 732 x 250	28	6.35 /12.70	Wireless(S) / Wired(O)	35/50/70/100/150
		PEAD-RP60JA(L)	6.0	1.62	3 steps	21.0	25-33	1100 x 732 x 250	33	9.52 / 15.88	Wireless(S) / Wired(O)	35/50/70/100/150
		PEAD-RP71JA(L)	7.1	1.97	3 steps	25.0	26-34	1100 x 732 x 250	33	9.52 15.88	Wireless(S) / Wired(O)	35/50/70/100/150
Wall mounted	MSY-EF	MSY-EF10VA	2.5	0.14	5 steps	8.3	21-42	895 x 195 x 299	11.5	6.35 / 9.52	Wireless(S)	-
		MSY-EF13VA	3.5	0.14	5 steps	8.3	21-42	895 x 195 x 299	11.5	6.35 / 9.52	Wireless(S)	-
		MSY-EF18VA	5.0	0.18	5 steps	9.3	30-43	895 x 195 x 299	11.5	6.35 / 12.70	Wireless(S)	-

*PEAD-RP60JA(L) and PEAD-RP71JA(L) can be connected to MXY-4A38VA only.
Total Indoor Running current must not exceed 3Amps when connecting to PEAD series.
*MXY-2E20VA can be connected to wall mount series only of up to cooling capacity of 3.5kW.

Legend: (S)-Standard, (O)-Optional



PLA-RP35/50/71BA

(Optional)



MLZ-KA50VA



SEZ-KD35/50/71VAL

(Optional)

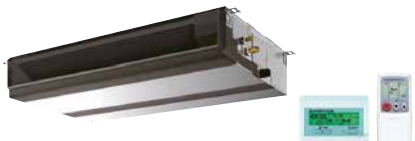

PEAD-RP50/60/71JA(L)

(Optional)



MSY-EF10/13/18VA

Inverter Multi Split System MXY Series (For private dwellings & HDB flats without current limitation)

Outdoor unit	Indoor unit combination	(A + B + C + D)	Capacity of each indoor unit (kW) A	B	C	D	Total capacity (kW) Nominal Rating	Min.	Max.	Total power input (kW) Nominal Rating	Min.	Max.	Total running current (A) Nominal Rating	Min.	Max.
MXY-3A28VA	1 Room	10	2.50	–	–	–	2.50	1.40	3.50	0.59	0.45	0.85	2.59	1.98	3.73
		13	3.50	–	–	–	3.50	1.50	4.30	0.81	0.45	1.00	3.56	1.98	4.39
		18	5.00	–	–	–	5.00	1.60	5.90	1.23	0.48	1.64	5.40	2.11	7.20
		24	6.00	–	–	–	6.00	1.60	6.60	1.72	0.54	1.95	7.55	2.37	8.56
		26	7.10	–	–	–	7.10	1.70	7.50	2.55	0.54	2.80	11.20	2.37	12.30
	2 Rooms	10+10	2.50	2.50	–	–	5.00	2.00	6.50	1.28	0.60	1.89	5.62	2.64	8.30
		10+13	2.50	3.50	–	–	6.00	2.00	6.80	1.74	0.60	2.06	7.64	2.64	9.05
		10+18	2.50	4.70	–	–	7.20	2.00	7.60	2.62	0.63	2.83	11.51	2.77	12.43
		10+24	2.20	5.00	–	–	7.20	2.00	8.20	2.62	0.64	3.22	11.51	2.81	14.14
		10+26	2.10	5.10	–	–	7.20	2.00	8.20	2.62	0.64	3.22	11.51	2.81	14.14
		13+13	3.50	3.50	–	–	7.00	2.00	7.40	2.36	0.60	2.59	10.36	2.64	11.37
		13+18	3.20	4.00	–	–	7.20	2.00	7.60	2.62	0.63	2.83	11.51	2.77	12.43
		13+24	3.00	4.20	–	–	7.20	2.00	8.20	2.62	0.64	3.22	11.51	2.81	14.14
		13+26	2.90	4.30	–	–	7.20	2.00	8.20	2.62	0.64	3.22	11.51	2.81	14.14
		18+18	3.60	3.60	–	–	7.20	2.00	7.50	2.62	0.66	2.84	11.51	2.90	12.47
		18+24	3.41	4.09	–	–	7.50	2.00	8.00	2.57	0.68	2.90	11.29	2.99	12.74
		18+26	3.10	4.40	–	–	7.50	2.00	8.00	2.57	0.68	2.90	11.29	2.99	12.74
		24+24	3.75	3.75	–	–	7.50	2.00	8.40	2.43	0.70	3.00	10.67	3.07	13.18
		24+26	3.44	4.06	–	–	7.50	2.00	8.40	2.43	0.70	3.00	10.67	3.07	13.18
	3 Rooms	10+10+10	2.50	2.50	2.50	–	7.50	2.90	8.90	2.18	0.76	2.88	9.57	3.34	12.65
		10+10+13	2.21	2.21	3.08	–	7.50	2.90	8.90	2.18	0.76	2.88	9.57	3.34	12.65
		10+10+18	1.88	1.88	3.74	–	7.50	2.90	8.90	2.10	0.79	2.88	9.22	3.47	12.65
		10+10+24	1.70	1.70	4.10	–	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65
		10+10+26	1.55	1.55	4.40	–	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65
		10+13+13	1.98	2.76	2.76	–	7.50	2.90	8.90	2.18	0.76	2.88	9.57	3.34	12.65
		10+13+18	1.70	2.39	3.41	–	7.50	2.90	8.90	2.10	0.79	2.88	9.22	3.47	12.65
		10+13+24	1.56	2.19	3.75	–	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65
		10+13+26	1.44	2.00	4.06	–	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65
		10+18+18	1.50	3.00	3.00	–	7.50	2.90	8.90	2.08	0.82	2.88	9.13	3.60	12.65
		10+18+24	1.39	2.78	3.33	–	7.50	2.90	8.90	2.04	0.83	2.88	8.96	3.65	12.65
		10+18+26	1.28	2.57	3.65	–	7.50	2.90	8.90	2.04	0.83	2.88	8.96	3.65	12.65
		13+13+13	2.50	2.50	2.50	–	7.50	2.90	8.90	2.18	0.76	2.88	9.57	3.34	12.65
		13+13+18	2.19	2.19	3.12	–	7.50	2.90	8.90	2.10	0.79	2.88	9.22	3.47	12.65
		13+13+24	2.02	2.02	3.46	–	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65
		13+13+26	1.86	1.86	3.78	–	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65
		13+18+18	1.94	2.78	2.78	–	7.50	2.90	8.90	2.08	0.82	2.88	9.13	3.60	12.65
		13+18+24	1.82	2.58	3.10	–	7.50	2.90	8.90	2.04	0.82	2.88	8.96	3.60	12.65
MXY-4A28VA	1 Room	10	2.50	–	–	–	2.50	1.40	3.50	0.59	0.45	0.85	2.59	1.98	3.73
		13	3.50	–	–	–	3.50	1.50	4.30	0.81	0.45	1.00	3.56	1.98	4.39
		18	5.00	–	–	–	5.00	1.60	5.90	1.23	0.48	1.64	5.40	2.11	7.20
		24	6.00	–	–	–	6.00	1.60	6.60	1.72	0.54	1.95	7.55	2.37	8.56
		26	7.10	–	–	–	7.10	1.70	7.50	2.55	0.54	2.80	11.20	2.37	12.30
	2 Rooms	10+10	2.50	2.50	–	–	5.00	2.00	6.50	1.28	0.60	1.89	5.62	2.64	8.30
		10+13	2.50	3.50	–	–	6.00	2.00	6.80	1.74	0.60	2.06	7.64	2.64	9.05
		10+18	2.50	4.70	–	–	7.20	2.00	7.60	2.62	0.63	2.83	11.51	2.77	12.43
		10+24	2.20	5.00	–	–	7.20	2.00	8.20	2.62	0.64	3.22	11.51	2.81	14.14
		10+26	2.10	5.10	–	–	7.20	2.00	8.20	2.62	0.64	3.22	11.51	2.81	14.14
		13+13	3.50	3.50	–	–	7.00	2.00	7.40	2.36	0.60	2.59	10.36	2.64	11.37
		13+18	3.20	4.00	–	–	7.20	2.00	7.60	2.62	0.63	2.83	11.51	2.77	12.43
		13+24	3.00	4.20	–	–	7.20	2.00	8.20	2.62	0.64	3.22	11.51	2.81	14.14
		13+26	2.90	4.30	–	–	7.20	2.00	8.20	2.62	0.64	3.22	11.51	2.81	14.14
		18+18	3.60	3.60	–	–	7.20	2.00	7.50	2.62	0.66	2.84	11.51	2.90	12.47
		18+24	3.41	4.09	–	–	7.50	2.00	8.00	2.57	0.68	2.90	11.29	2.99	12.74
		18+26	3.10	4.40	–	–	7.50	2.00	8.00	2.57	0.68	2.90	11.29	2.99	12.74
		24+24	3.75	3.75	–	–	7.50	2.00	8.40	2.43	0.70	3.00	10.67	3.07	13.18
		24+26	3.44	4.06	–	–	7.50	2.00	8.40	2.43	0.70	3.00	10.67	3.07	13.18
	3 Rooms	10+10+10	2.50	2.50	2.50	–	7.50	2.90	8.90	2.18	0.76	2.88	9.57	3.34	12.65
		10+10+13	2.21	2.21	3.08	–	7.50	2.90	8.90	2.18	0.76	2.88	9.57	3.34	12.65
		10+10+18	1.88	1.88	3.74	–	7.50	2.90	8.90	2.10	0.79	2.88	9.22	3.47	12.65
		10+10+24	1.70	1.70	4.10	–	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65
		10+10+26	1.55	1.55	4.40	–	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65
		10+13+13	1.98	2.76	2.76	–	7.50	2.90	8.90	2.18	0.76	2.88	9.57	3.34	12.65
		10+13+18	1.70	2.39	3.41	–	7.50	2.90	8.90	2.10	0.79	2.88	9.22	3.47	12.65
		10+13+24	1.56	2.19	3.75	–	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65
		10+13+26	1.44	2.00	4.06	–	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65
		10+18+18	1.50	3.00	3.00	–	7.50	2.90	8.90	2.08	0.82	2.88	9.13	3.60	12.65
		10+18+24	1.39	2.78	3.33	–	7.50	2.90	8.90	2.04	0.83	2.88	8.96	3.65	12.65
		10+18+26	1.28	2.57	3.65	–	7.50	2.90	8.90	2.04	0.83	2.88	8.96	3.65	12.65
		13+13+13	2.50	2.50	2.50	–	7.50	2.90	8.90	2.18	0.76	2.88	9.57	3.34	12.65
		13+13+18	2.19	2.19	3.12	–	7.50	2.90	8.90	2.10	0.79	2.88	9.22	3.47	12.65
		13+13+24	2.02	2.02	3.46	–	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65
		13+13+26	1.86	1.86	3.78	–	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65
		13+18+18	1.94	2.78	2.78	–	7.50	2.90	8.90	2.08	0.82	2.88	9.13	3.60	12.65
		13+18+24	1.82	2.58	3.10	–	7.50	2.90	8.90	2.04	0.82	2.88	8.96	3.60	12.65
	4 Rooms	10+10+10+10	1.875	1.875	1.875	1.875	7.50	3.70	8.90	2.16	0.92	2.85	9.49	4.04	12.52
		10+10+10+13	1.70	1.70	1.70	2.40	7.50	3.70	8.90	2.16	0.92	2.85	9.49	4.04	12.52
		10+10+10+18	1.50	1.50	1.50	3.00	7.50	3.70	8.90	2.08	0.95	2.85	9.13	4.17	12.52
		10+10+10+24	1.39	1.39	1.39	3.33	7.50	3.70	8.90	2.06	0.96	2.85	9.05	4.22	12.52
		10+10+10+26	1.28	1.28	1.28	3.66	7.50	3.70	8.90	2.06	0.96	2.85	9.05	4.22	12.52
		10+10+13+13	1.56	1.56	2.19	2.19	7.50	3.70	8.90	2.16	0.92	2.85	9.49	4.04	12.52
		10+10+13+18	1.39	1.39	1.94	2.78	7.50	3.70	8.90	2.08	0.95	2.85	9.13	4.17	12.52
		10+10+13+24	1.29	1.29	1.81	3.11	7.50	3.70	8.90	2.06	0.95	2.85	9.05	4.17	12.52
		10+10+13+26	1.20	1.20	1.68	3.42	7.50	3.70	8.90	2.06	0.95	2.85	9.05	4.17	12.52
		10+13+13+13	1.44	2.02	2.02	2.02	7.50	3.70	8.90	2.16	0.92	2.85	9.49	4.04	12.52
		10+13+13+18	1.29	1.81	1.81	2.59	7.50	3.70	8.90	2.08	0.95	2.85	9.13	4.17	12.52
		13+13+13+13	1.875	1.875	1.875	1.875	7.50	3.70	8.90	2.16	0.95	2.85	9.49	4.17	12.52

CAPACITY

Mitsubishi Electric starMEX Air-Conditioner

Inverter Multi Split System MXY Series (For private dwellings & HDB flats without current limitation)

Outdoor unit	Indoor unit combination		Capacity of each indoor unit (kW)				Total capacity (kW)			Total power input (kW)			Total running current (A)		
	(A + B + C + D)		A	B	C	D	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.
MXY-4A38VA	1 Room	10	2.50	–	–	–	2.50	1.40	3.50	0.59	0.43	0.81	2.59	1.89	3.56
		13	3.50	–	–	–	3.50	1.40	4.30	0.81	0.43	1.00	3.56	1.89	4.39
		18	5.00	–	–	–	5.00	1.50	6.10	1.23	0.47	1.64	5.40	2.06	7.20
		24	6.00	–	–	–	6.00	1.60	6.70	1.72	0.47	1.93	7.55	2.06	8.48
		26	7.10	–	–	–	7.10	1.60	8.50	2.55	0.47	3.48	11.20	2.06	15.28
	2 Rooms	10+10	2.50	2.50	–	–	5.00	2.00	6.50	1.18	0.64	1.89	5.18	2.81	8.30
		10+13	2.50	3.50	–	–	6.00	2.00	7.30	1.61	0.64	2.35	7.07	2.81	10.32
		10+18	2.50	5.00	–	–	7.50	2.00	8.50	2.46	0.64	3.28	10.80	2.81	14.40
		10+24	2.50	6.00	–	–	8.50	2.00	8.70	3.32	0.65	3.48	14.58	2.85	15.28
		10+26	2.27	6.43	–	–	8.70	2.00	8.80	3.38	0.65	3.48	14.84	2.85	15.28
		13+13	3.50	3.50	–	–	7.00	2.00	8.80	2.22	0.64	3.33	9.75	2.81	14.62
		13+18	3.50	5.00	–	–	8.50	2.00	8.90	3.32	0.64	3.48	14.58	2.81	15.28
		13+24	3.21	5.49	–	–	8.70	2.00	9.10	3.27	0.65	3.48	14.36	2.85	15.28
		13+26	2.87	5.83	–	–	8.70	2.00	9.10	3.20	0.65	3.48	14.05	2.85	15.28
		18+18	4.35	4.35	–	–	8.70	2.10	9.10	3.20	0.69	3.48	14.05	3.03	15.28
		18+24	4.00	4.80	–	–	8.80	2.10	9.20	3.20	0.69	3.48	14.05	3.03	15.28
		18+26	3.64	5.16	–	–	8.80	2.10	9.20	3.20	0.69	3.48	14.05	3.03	15.28
		24+24	4.40	4.40	–	–	8.80	2.10	9.20	3.20	0.69	3.48	14.05	3.03	15.28
		24+26	4.03	4.77	–	–	8.80	2.10	9.20	3.20	0.69	3.48	14.05	3.03	15.28
		26+26	4.40	4.40	–	–	8.80	2.10	9.20	3.20	0.69	3.48	14.05	3.03	15.28
	3 Rooms	10+10+10	2.50	2.50	2.50	–	7.50	2.90	10.00	1.88	0.78	3.48	8.26	3.43	15.28
		10+10+13	2.50	2.50	3.50	–	8.50	2.90	10.00	2.33	0.78	3.48	10.23	3.43	15.28
		10+10+18	2.28	2.28	4.54	–	9.10	2.90	10.60	2.52	0.81	3.48	11.07	3.56	15.28
		10+10+24	2.07	2.07	4.96	–	9.10	2.90	10.60	2.51	0.81	3.48	11.02	3.56	15.28
		10+10+26	1.88	1.88	5.34	–	9.10	2.90	10.60	2.51	0.81	3.48	11.02	3.56	15.28
		10+13+13	2.36	3.32	3.32	–	9.00	2.90	10.60	2.54	0.78	3.48	11.16	3.43	15.28
		10+13+18	2.07	2.90	4.13	–	9.10	2.90	10.60	2.51	0.81	3.48	11.02	3.56	15.28
		10+13+24	1.90	2.65	4.55	–	9.10	2.90	10.60	2.51	0.81	3.48	11.02	3.56	15.28
		10+13+26	1.76	2.46	4.98	–	9.20	2.90	10.70	2.59	0.81	3.48	11.37	3.56	15.28
		10+18+18	1.84	3.68	3.68	–	9.20	2.90	10.70	2.58	0.81	3.48	11.33	3.56	15.28
		10+18+24	1.70	3.42	4.08	–	9.20	2.90	10.70	2.58	0.81	3.48	11.33	3.56	15.28
		10+18+26	1.58	3.15	4.47	–	9.20	2.90	10.70	2.56	0.81	3.48	11.24	3.56	15.28
		10+24+24	1.58	3.81	3.81	–	9.20	2.90	10.70	2.55	0.81	3.48	11.20	3.56	15.28
		13+13+13	3.00	3.00	3.00	–	9.00	2.90	10.60	2.52	0.81	3.48	11.07	3.56	15.28
		13+13+18	2.65	2.65	3.80	–	9.10	2.90	10.60	2.51	0.81	3.48	11.02	3.56	15.28
		13+13+24	2.48	2.48	4.24	–	9.20	2.90	10.70	2.59	0.81	3.48	11.37	3.56	15.28
		13+13+26	2.28	2.28	4.64	–	9.20	2.90	10.70	2.59	0.81	3.48	11.37	3.56	15.28
		13+18+18	2.38	3.41	3.41	–	9.20	2.90	10.70	2.58	0.81	3.48	11.33	3.56	15.28
		13+18+24	2.22	3.17	3.81	–	9.20	2.90	10.70	2.56	0.81	3.48	11.24	3.56	15.28
		13+24+24	2.08	3.56	3.56	–	9.20	2.90	10.80	2.55	0.81	3.48	11.20	3.56	15.28
		18+18+18	3.06	3.06	3.06	–	9.18	2.90	10.80	2.53	0.83	3.48	11.11	3.65	15.28
	4 Rooms	10+10+10+10	2.30	2.30	2.30	2.30	9.20	3.70	11.20	2.48	0.93	3.48	10.89	4.08	15.28
		10+10+10+13	2.09	2.09	2.09	2.93	9.20	3.70	11.20	2.48	0.93	3.48	10.89	4.08	15.28
		10+10+10+18	1.84	1.84	1.84	3.68	9.20	3.70	11.20	2.45	0.93	3.45	10.76	4.08	15.15
		10+10+10+24	1.70	1.70	1.70	4.10	9.20	3.70	11.20	2.44	0.93	3.44	10.72	4.08	15.11
		10+10+10+26	1.58	1.58	1.58	4.46	9.20	3.70	11.20	2.44	0.93	3.44	10.72	4.08	15.11
		10+10+13+13	1.92	1.92	2.68	2.68	9.20	3.70	11.20	2.48	0.93	3.48	10.89	4.08	15.28
		10+10+13+18	1.70	1.70	2.39	3.41	9.20	3.70	11.20	2.45	0.93	3.45	10.76	4.08	15.15
		10+10+13+24	1.59	1.59	2.22	3.80	9.20	3.70	11.20	2.44	0.93	3.44	10.72	4.08	15.11
		10+10+13+26	1.47	1.47	2.07	4.19	9.20	3.70	11.20	2.44	0.93	3.44	10.72	4.08	15.11
		10+10+18+18	1.53	1.53	3.07	3.07	9.20	3.70	11.20	2.41	0.95	3.41	10.58	4.17	14.98
		10+13+13+13	1.76	2.48	2.48	2.48	9.20	3.70	11.20	2.48	0.93	3.48	10.89	4.08	15.28
		10+13+13+18	1.59	2.22	2.22	3.17	9.20	3.70	11.20	2.45	0.93	3.45	10.76	4.08	15.15
		10+13+13+24	1.48	2.08	2.08	3.56	9.20	3.70	11.20	2.44	0.93	3.44	10.72	4.08	15.11
		13+13+13+13	2.30	2.30	2.30	2.30	9.20	3.70	11.20	2.48	0.93	3.48	10.89	4.08	15.28
		13+13+13+18	2.08	2.08	2.08	2.96	9.20	3.70	11.20	2.45	0.93	3.45	10.76	4.08	15.15
		13+13+13+24	1.95	1.95	1.95	3.35	9.20	3.70	11.20	2.45	0.93	3.45	10.76	4.08	15.15
MXY-2E20VA	1 Room	10	2.50	–	–	–	2.50	0.90	2.60	0.70	0.15	0.71	3.38	0.72	3.43
		13	3.50	–	–	–	3.50	0.90	3.65	0.98	0.15	0.99	4.73	0.72	4.78
	2 Rooms	10+10	2.40	2.40	–	–	4.80	1.10	6.30	1.44	0.30	2.44	6.45	1.34	10.94
		10+13	2.10	2.80	–	–	4.90	1.10	6.40	1.44	0.30	2.44	6.45	1.34	10.94
		13+13	2.50	2.50	–	–	5.00	1.10	6.55	1.44	0.31	2.44	6.45	1.39	10.94

Inverter Multi Split System *MXY Series* *(For HDB flats with limited current)*

Outdoor unit	Indoor unit combination	(A + B + C + D)	Capacity of each indoor unit (kW) A	B	C	D	Total capacity (kW) Nominal Rating	Min.	Max.	Total power input (kW) Nominal Rating	Min.	Max.	Total running current (A) Nominal Rating	Min.	Max.
MXY-3A28VA (8.5A)	1 Room	10	2.50	–	–	–	2.50	1.40	3.50	0.59	0.45	0.85	2.59	1.98	3.73
		13	3.50	–	–	–	3.50	1.50	4.30	0.81	0.45	1.00	3.56	1.98	4.39
		18	5.00	–	–	–	5.00	1.60	5.90	1.23	0.48	1.64	5.40	2.11	7.20
		24	6.00	–	–	–	6.00	1.60	6.60	1.72	0.54	1.95	7.55	2.37	8.56
		26	6.70	–	–	–	6.70	1.70	6.70	1.93	0.54	1.93	8.48	2.37	8.48
	2 Rooms	10+10	2.50	2.50	–	–	5.00	2.00	6.50	1.28	0.60	1.89	5.62	2.64	8.30
		10+13	2.50	3.50	–	–	6.00	2.00	6.60	1.74	0.60	1.93	7.64	2.64	8.48
		10+18	2.25	4.45	–	–	6.70	2.00	6.70	1.91	0.63	1.91	8.39	2.77	8.39
		10+24	1.99	4.71	–	–	6.70	2.00	6.70	1.91	0.64	1.91	8.39	2.81	8.39
		10+26	1.77	4.93	–	–	6.70	2.00	6.70	1.91	0.64	1.91	8.39	2.81	8.39
		13+13	3.35	3.35	–	–	6.70	2.00	6.70	1.93	0.60	1.93	8.48	2.64	8.48
		13+18	2.77	3.93	–	–	6.70	2.00	6.70	1.91	0.63	1.91	8.39	2.77	8.39
		13+24	2.48	4.22	–	–	6.70	2.00	6.70	1.91	0.64	1.91	8.39	2.81	8.39
		13+26	2.23	4.47	–	–	6.70	2.00	6.70	1.91	0.64	1.91	8.39	2.81	8.39
		18+18	3.35	3.35	–	–	6.70	2.00	6.70	1.91	0.66	1.91	8.39	2.90	8.39
		18+24	3.05	3.65	–	–	6.70	2.00	6.70	1.91	0.68	1.91	8.39	2.99	8.39
		18+26	2.80	3.90	–	–	6.70	2.00	6.70	1.91	0.68	1.91	8.39	2.99	8.39
		24+24	3.35	3.35	–	–	6.70	2.00	6.70	1.91	0.70	1.91	8.39	3.07	8.39
		24+26	3.07	3.63	–	–	6.70	2.00	6.70	1.91	0.70	1.91	8.39	3.07	8.39
	3 Rooms	10+10+10	2.40	2.40	2.40	–	7.20	2.90	7.20	1.90	0.76	1.90	8.34	3.34	8.34
		10+10+13	2.11	2.11	2.98	–	7.20	2.90	7.20	1.90	0.76	1.90	8.34	3.34	8.34
		10+10+18	1.78	1.78	3.64	–	7.20	2.90	7.20	1.90	0.79	1.90	8.34	3.47	8.34
		10+10+24	1.60	1.60	4.00	–	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34
		10+10+26	1.45	1.45	4.30	–	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34
		10+13+13	1.88	2.66	2.66	–	7.20	2.90	7.20	1.90	0.76	1.90	8.34	3.34	8.34
		10+13+18	1.60	2.29	3.31	–	7.20	2.90	7.20	1.90	0.79	1.90	8.34	3.47	8.34
		10+13+24	1.46	2.09	3.65	–	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34
		10+13+26	1.34	1.90	3.96	–	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34
		10+18+18	1.40	2.90	2.90	–	7.20	2.90	7.20	1.90	0.82	1.90	8.34	3.60	8.34
		10+18+24	1.29	2.68	3.23	–	7.20	2.90	7.20	1.90	0.83	1.90	8.34	3.65	8.34
		10+18+26	1.18	2.47	3.55	–	7.20	2.90	7.20	1.90	0.83	1.90	8.34	3.65	8.34
		13+13+13	2.40	2.40	2.40	–	7.20	2.90	7.20	1.90	0.76	1.90	8.34	3.34	8.34
		13+13+18	2.09	2.09	3.02	–	7.20	2.90	7.20	1.90	0.79	1.90	8.34	3.47	8.34
		13+13+24	1.92	1.92	3.36	–	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34
		13+13+26	1.76	1.76	3.68	–	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34
		13+18+18	1.84	2.68	2.68	–	7.20	2.90	7.20	1.90	0.82	1.90	8.34	3.60	8.34
		13+18+24	1.72	2.48	3.00	–	7.20	2.90	7.20	1.90	0.82	1.90	8.34	3.60	8.34
MXY-4A28VA (8.5A)	1 Room	10	2.50	–	–	–	2.50	1.40	3.50	0.59	0.45	0.85	2.59	1.98	3.73
		13	3.50	–	–	–	3.50	1.50	4.30	0.81	0.45	1.00	3.56	1.98	4.39
		18	5.00	–	–	–	5.00	1.60	5.90	1.23	0.48	1.64	5.40	2.11	7.20
		24	6.00	–	–	–	6.00	1.60	6.60	1.72	0.54	1.95	7.55	2.37	8.56
		26	6.70	–	–	–	6.70	1.70	6.70	1.93	0.54	1.93	8.48	2.37	8.48
	2 Rooms	10+10	2.50	2.50	–	–	5.00	2.00	6.50	1.28	0.60	1.89	5.62	2.64	8.30
		10+13	2.50	3.50	–	–	6.00	2.00	6.60	1.74	0.60	1.93	7.64	2.64	8.48
		10+18	2.25	4.45	–	–	6.70	2.00	6.70	1.91	0.63	1.91	8.39	2.77	8.39
		10+24	1.99	4.71	–	–	6.70	2.00	6.70	1.91	0.64	1.91	8.39	2.81	8.39
		10+26	1.77	4.93	–	–	6.70	2.00	6.70	1.91	0.64	1.91	8.39	2.81	8.39
		13+13	3.35	3.35	–	–	6.70	2.00	6.70	1.93	0.60	1.93	8.48	2.64	8.48
		13+18	2.77	3.93	–	–	6.70	2.00	6.70	1.91	0.63	1.91	8.39	2.77	8.39
		13+24	2.48	4.22	–	–	6.70	2.00	6.70	1.91	0.64	1.91	8.39	2.81	8.39
		13+26	2.23	4.47	–	–	6.70	2.00	6.70	1.91	0.64	1.91	8.39	2.81	8.39
		18+18	3.35	3.35	–	–	6.70	2.00	6.70	1.91	0.66	1.91	8.39	2.90	8.39
		18+24	3.05	3.65	–	–	6.70	2.00	6.70	1.91	0.68	1.91	8.39	2.99	8.39
		18+26	2.80	3.90	–	–	6.70	2.00	6.70	1.91	0.68	1.91	8.39	2.99	8.39
		24+24	3.35	3.35	–	–	6.70	2.00	6.70	1.91	0.70	1.91	8.39	3.07	8.39
		24+26	3.07	3.63	–	–	6.70	2.00	6.70	1.91	0.70	1.91	8.39	3.07	8.39
	3 Rooms	10+10+10	2.40	2.40	2.40	–	7.20	2.90	7.20	1.90	0.76	1.90	8.34	3.34	8.34
		10+10+13	2.11	2.11	2.98	–	7.20	2.90	7.20	1.90	0.76	1.90	8.34	3.34	8.34
		10+10+18	1.78	1.78	3.64	–	7.20	2.90	7.20	1.90	0.79	1.90	8.34	3.47	8.34
		10+10+24	1.60	1.60	4.00	–	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34
		10+10+26	1.45	1.45	4.30	–	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34
		10+13+13	1.88	2.66	2.66	–	7.20	2.90	7.20	1.90	0.76	1.90	8.34	3.34	8.34
		10+13+18	1.60	2.29	3.31	–	7.20	2.90	7.20	1.90	0.79	1.90	8.34	3.47	8.34
		10+13+24	1.46	2.09	3.65	–	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34
		10+13+26	1.34	1.90	3.96	–	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34
		10+18+18	1.40	2.90	2.90	–	7.20	2.90	7.20	1.90	0.82	1.90	8.34	3.60	8.34
		10+18+24	1.29	2.68	3.23	–	7.20	2.90	7.20	1.90	0.83	1.90	8.34	3.65	8.34
		10+18+26	1.18	2.47	3.55	–	7.20	2.90	7.20	1.90	0.83	1.90	8.34	3.65	8.34
		13+13+13	2.40	2.40	2.40	–	7.20	2.90	7.20	1.90	0.76	1.90	8.34	3.34	8.34
		13+13+18	2.09	2.09	3.02	–	7.20	2.90	7.20	1.90	0.79	1.90	8.34	3.47	8.34
		13+13+24	1.92	1.92	3.36	–	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34
		13+13+26	1.76	1.76	3.68	–	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34
		13+18+18	1.84	2.68	2.68	–	7.20	2.90	7.20	1.90	0.82	1.90	8.34	3.60	8.34
		13+18+24	1.72	2.48	3.00	–	7.20	2.90	7.20	1.90	0.82	1.90	8.34	3.60	8.34
	4 Rooms	10+10+10+10	1.80	1.80	1.80	1.80	7.20	3.70	7.20	1.89	0.92	1.89	8.30	4.04	8.30
		10+10+10+13	1.80	1.80	1.80	1.80	7.20	3.70	7.20	1.89	0.92	1.89	8.30	4.04	8.30
		10+10+10+18	1.50	1.50	1.50	2.70	7.20	3.70	7.20	1.89	0.95	1.89	8.30	4.17	8.30
		10+10+10+24	1.39	1.39	1.39	3.03	7.20	3.70	7.20	1.89	0.96	1.89	8.30	4.22	8.30
		10+10+10+26	1.28	1.28	1.28	3.36	7.20	3.70	7.20	1.89	0.96	1.89	8.30	4.22	8.30
		10+10+13+13	1.80	1.80	1.80	1.80	7.20	3.70	7.20	1.89	0.92	1.89	8.30	4.04	8.30
		10+10+13+18	1.50	1.50	1.50	2.70	7.20	3.70	7.20	1.89	0.95	1.89	8.30	4.17	8.30
		10+10+13+24	1.39	1.39	1.39	3.03	7.20	3.70	7.20	1.89	0.95	1.89	8.30	4.17	8.30
		10+10+13+26	1.28	1.28	1.28	3.36	7.20	3.70	7.20	1.89	0.95	1.89	8.30	4.17	8.30
		10+13+13+13	1.80	1.80	1.80	1.80	7.20	3.70	7.20	1.89	0.92	1.89	8.30	4.04	8.30
		10+13+13+18	1.50	1.50	1.50	2.70	7.20	3.70	7.20	1.89	0.95	1.89	8.30	4.17	8.30
		13+13+13+13	1.80	1.80	1.80	1.80	7.20	3.70	7.20	1.89	0.95	1.89	8.30	4.17	8.30

Inverter Multi Split System MXY Series (For HDB flats with limited current)

Outdoor unit	Indoor unit combination		Capacity of each indoor unit (kW)				Total capacity (kW)			Total power input (kW)			Total running current (A)		
	(A + B + C + D)		A	B	C	D	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.
MXY-4A38VA (8.5A)	1 Room	10	2.50	–	–	–	2.50	1.40	3.50	0.59	0.43	0.81	2.59	1.89	3.56
		13	3.50	–	–	–	3.50	1.40	4.30	0.81	0.43	1.00	3.56	1.89	4.39
		18	5.00	–	–	–	5.00	1.50	6.10	1.23	0.47	1.64	5.40	2.06	7.20
		24	6.00	–	–	–	6.00	1.60	6.70	1.72	0.47	1.93	7.55	2.06	8.48
		26	6.70	–	–	–	6.70	1.60	6.70	1.93	0.47	1.93	8.48	2.06	8.48
	2 Rooms	10+10	2.50	2.50	–	–	5.00	2.00	6.50	1.18	0.64	1.89	5.18	2.81	8.30
		10+13	2.50	3.50	–	–	6.00	2.00	6.60	1.61	0.64	1.89	7.07	2.81	8.30
		10+18	2.20	4.40	–	–	6.60	2.00	6.60	1.93	0.64	1.93	8.48	2.81	8.48
		10+24	1.94	4.66	–	–	6.60	2.00	6.60	1.93	0.65	1.93	8.48	2.85	8.48
		10+26	1.72	4.88	–	–	6.60	2.00	6.60	1.93	0.65	1.93	8.48	2.85	8.48
		13+13	3.25	3.25	–	–	6.50	2.00	6.50	1.93	0.64	1.93	8.48	2.81	8.48
		13+18	2.72	3.88	–	–	6.60	2.00	6.60	1.93	0.64	1.93	8.48	2.81	8.48
		13+24	2.43	4.17	–	–	6.60	2.00	6.60	1.93	0.65	1.93	8.48	2.85	8.48
		13+26	2.18	4.42	–	–	6.60	2.00	6.60	1.93	0.65	1.93	8.48	2.85	8.48
		18+18	3.35	3.35	–	–	6.70	2.10	6.70	1.93	0.69	1.93	8.48	3.03	8.48
		18+24	3.05	3.65	–	–	6.70	2.10	6.70	1.93	0.69	1.93	8.48	3.03	8.48
		18+26	2.80	3.90	–	–	6.70	2.10	6.70	1.93	0.69	1.93	8.48	3.03	8.48
		24+24	3.35	3.35	–	–	6.70	2.10	6.70	1.93	0.69	1.93	8.48	3.03	8.48
		24+26	3.07	3.63	–	–	6.70	2.10	6.70	1.93	0.69	1.93	8.48	3.03	8.48
		26+26	3.35	3.35	–	–	6.70	2.10	6.70	1.93	0.69	1.93	8.48	3.03	8.48
	3 Rooms	10+10+10	2.50	2.50	2.50	–	7.50	2.90	7.60	1.88	0.78	1.93	8.26	3.43	8.48
		10+10+13	2.24	2.24	3.12	–	7.60	2.90	7.60	1.93	0.78	1.93	8.48	3.43	8.48
		10+10+18	1.95	1.95	3.90	–	7.80	2.90	7.80	1.93	0.81	1.93	8.48	3.56	8.48
		10+10+24	1.77	1.77	4.26	–	7.80	2.90	7.80	1.92	0.81	1.92	8.43	3.56	8.43
		10+10+26	1.61	1.61	4.58	–	7.80	2.90	7.80	1.92	0.81	1.92	8.43	3.56	8.43
		10+13+13	2.00	2.80	2.80	–	7.60	2.90	7.60	1.93	0.78	1.93	8.48	3.43	8.48
		10+13+18	1.77	2.48	3.55	–	7.80	2.90	7.80	1.93	0.81	1.93	8.48	3.56	8.48
		10+13+24	1.63	2.27	3.90	–	7.80	2.90	7.80	1.92	0.81	1.92	8.43	3.56	8.43
		10+13+26	1.49	2.08	4.23	–	7.80	2.90	7.80	1.93	0.81	1.92	8.48	3.56	8.43
		10+18+18	1.56	3.12	3.12	–	7.80	2.90	7.80	1.93	0.81	1.93	8.48	3.56	8.48
		10+18+24	1.44	2.89	3.47	–	7.80	2.90	7.80	1.92	0.81	1.92	8.43	3.56	8.43
		10+18+26	1.34	2.67	3.79	–	7.80	2.90	7.80	1.92	0.81	1.92	8.43	3.56	8.43
		10+24+24	1.34	3.23	3.23	–	7.80	2.90	7.80	1.91	0.81	1.91	8.39	3.56	8.39
		13+13+13	2.53	2.53	2.53	–	7.59	2.90	7.59	1.93	0.81	1.93	8.48	3.56	8.48
		13+13+18	2.28	2.28	3.24	–	7.80	2.90	7.80	1.93	0.81	1.93	8.48	3.56	8.48
		13+13+24	2.10	2.10	3.60	–	7.80	2.90	7.80	1.92	0.81	1.92	8.43	3.56	8.43
		13+13+26	1.94	1.94	3.92	–	7.80	2.90	7.80	1.92	0.81	1.92	8.43	3.56	8.43
		13+18+18	2.02	2.89	2.89	–	7.80	2.90	7.80	1.93	0.81	1.93	8.48	3.56	8.48
		13+18+24	1.88	2.69	3.23	–	7.80	2.90	7.80	1.92	0.81	1.92	8.43	3.56	8.43
		13+24+24	1.76	3.02	3.02	–	7.80	2.90	7.80	1.92	0.81	1.92	8.43	3.56	8.43
		18+18+18	2.60	2.60	2.60	–	7.80	2.90	7.80	1.91	0.83	1.91	8.39	3.65	8.39
	4 Rooms	10+10+10+10	2.00	2.00	2.00	2.00	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+10+10+13	1.82	1.82	1.82	2.54	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+10+10+18	1.60	1.60	1.60	3.20	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+10+10+24	1.48	1.48	1.48	3.56	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+10+10+26	1.37	1.37	1.37	3.89	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+10+13+13	1.67	1.67	2.33	2.33	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+10+13+18	1.48	1.48	2.08	2.96	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+10+13+24	1.38	1.38	1.93	3.31	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+10+13+26	1.28	1.28	1.80	3.64	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+10+18+18	1.33	1.33	2.67	2.67	8.00	3.70	8.00	1.93	0.95	1.93	8.48	4.17	8.48
		10+13+13+13	1.55	2.15	2.15	2.15	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+13+13+18	1.38	1.93	1.93	2.76	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+13+13+24	1.29	1.81	1.81	3.09	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		13+13+13+13	2.00	2.00	2.00	2.00	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		13+13+13+18	1.81	1.81	1.81	2.57	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		13+13+13+24	1.70	1.70	1.70	2.90	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
MXY-2E20VA (8.5A)	1 Room	10	2.50	–	–	–	2.50	0.90	2.60	0.70	0.15	0.71	3.38	0.72	3.43
		13	3.50	–	–	–	3.50	0.90	3.65	0.98	0.15	0.99	4.73	0.72	4.78
	2 Rooms	10+10	2.40	2.40	–	–	4.80	1.10	5.80	1.44	0.30	1.90	6.45	1.34	8.43
		10+13	2.10	2.80	–	–	4.90	1.10	5.90	1.44	0.30	1.90	6.45	1.34	8.43
		13+13	2.50	2.50	–	–	5.00	1.10	6.00	1.44	0.31	1.90	6.45	1.39	8.43

starMEX

Our New Starmex series range is designed to achieve industry's leading seasonal energy effciency through use of new technologies and high-performance compressor.



Indoor Unit



MSXY-FJ
Dimension (W x D x H): 923 x 250 x 305 mm



Outdoor Unit



MXY-2G20VA
Dimension (W x D x H):
800 x 285 x 550 mm



MXY-3G28VA / MXY-4G28VA
Dimension (W x D x H):
840 x 330 x 710 mm



MXY-4G38VA
Dimension (W x D x H):
950 x 330 x 796 mm



MXY-5G48VA
Dimension (W x D x H):
950 x 330 x 1048 mm

Inverter Multi Split system

Model - Outdoor			MXY-2G20VA	MXY-3G28VA	MXY-4G28VA	MXY-4G38VA	MXY-5G48VA
Model - Indoor			MSXY-FJ05/07/10/13VE	MSXY-FJ05/07/10/13/18/24VE			
No. of connectable indoor units (System)			2	3	4	4	5
Function & type			Cooling, Wall-mounted				
Capacity		kW	4.8 (1.5 - 6.3)	6.0 (2.9 - 8.9)	6.5 (2.9 - 8.9)	7.5 (3.7 - 11.2)	9.0 (4.4-13.5)
Power input		kW	0.985	1.23	1.33	1.54	1.85
Full load COP			4.87	4.88	4.89	4.87	4.87
Weighted COP			5.84	5.55	5.63	5.7	5.66
Max Running current (Indoor Only)		A	MSXY-FJ05/07VE:0.28/MSXY-FJ10/13VE:0.35/MSXY-FJ18VE:0.45/MSXY-FJ24VE:0.52				
Airflow (High)		CMM(m³/min)	MSXY-FJ05/07VE:15.1/MSXY-FJ10/13VE:16.9/MSXY-FJ18VE:18.7/MSXY-FJ24VE:19.9				
Dimension (W x D x H)	Indoor	mm	MSXY-FJ05/07/10/13/18/24VE: 923 x 250 x 305				
	Outdoor	mm	800 x 285 x 550	840 x 330 x 710		950 x 330 x 796	950 x 330 x 1048
Net Weight	Indoor	kg	MSXY-FJ05/07/10/13VE:13	MSXY-FJ05/07/10/13/18/24VE: 13			
	Outdoor	kg	38	52	53	61	86
Indoor Sound level*	(Silent-high)	dB(A)	MSXY-FJ05/07VE: (19-42)/ MSXY-FJ10/13VE: (19-47)	MSXY-FJ05/07VE: (19-42)/MSXY-FJ10/13VE: (19-47)/MSXY-FJ18VE:(28-49)/MSXY-FJ24VE:(30-50)			
Outdoor Sound level*	Silent	dB(A)	-	49	49	49	49
	Rated	dB(A)	49	56	56	53	53
Connection method	Indoor/Outdoor		Flared				
External Piping	Diameter	Gas (ø) mm	MSXY-FJ05/07/10/13VE: 9.52	MSXY-FJ05/07/10/13VE: 9.52/MSXY-FJ18VE: 12.7/MSXY-FJ24VE:15.88			
		Liquid (ø) mm	MSXY-FJ05/07/10/13VE: 6.35	MSXY-FJ05/07/10/13/18VE: 6.35/MSXY-FJ24VE:9.52			
	Max. length	Total - Each m	30-20	60-25	60-25	70-25	80-25
	Max. height	m	15				
Power Supply		V, Phase, Hz	230, 1, 50				
Energy labelling scheme**							

*Note: Sound level is measured in anechoic chambers.
** Tested based on NEA energy labelling scheme.

FJ Series

Introducing a compact and stylish indoor unit with amazing quiet performance. Having advantage of neat installations in small bedrooms made possible, and increase in energy-savings by selecting the optimal capacity required for each room.





MSXY-FJ

Easy Clean Design

The easily detachable panel is a snap to wash and the airflow vents can be opened without any special tools for quick cleaning of the inside of the air conditioner. It is recommended that the air conditioner be cleaned regularly as this will increase both operating efficiency and energy-savings. Always clean the heat exchanger, fan and air vent to ensure proper performance and economical operation. It reduces your electricity bill by approx. 45%*.

*Electricity bill comparison of operation under fixed temperature with 8 grams of soil on the fan and one without. Based on internal company data.

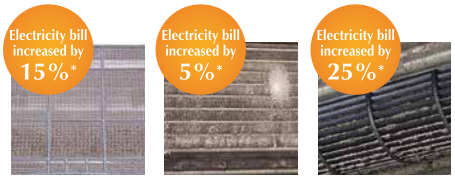

Filter　Heat exchanger　Fan

Nano Platinum Filter

The filter has a large capture area and incorporates nanometre-sized platinum-ceramic particles that work to kill bacteria and deodourise the circulating air. Better dust collection than conventional filters is also ensured.

Anti-Allergy Enzyme Filter

To counter allergens, we have added filters featuring artificial blue enzymes with the power to remove harmful microbes such as bacteria*1, virus*2, dust mites*3, pollen*3, etc.

The enzymes destroy any germs caught in the filter, preventing them from working their way further inside the air conditioner. However being artificial enzymes, they prevent allergies while remaining gentle on the human body.

(Confirmed by *1 Japan Spinners Inspecting Foundation test No. 007715-1,1　*2 Japan Food Research Laboratories Ref. No. 20491448-002　*3 Shinshu University)



Anti-Allergy Enzyme filter mechanism

1. Artificial enzyme (meta-phthalocyanine) catalysts on the filament catch allergens.
2. The artificial enzyme catalysts aid the chemical reaction with oxygen and sever the S-S bonds.
3. Once the S-S bonds are severed, the proteins no longer act as allergens.

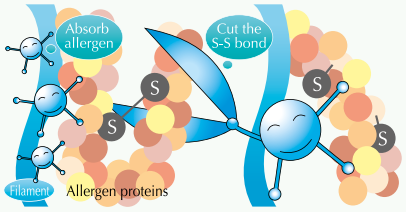

Allergen protein (such as mites) → *Transformed protein (Non-allergen proteins)*

EF Series

Developed to complement modern interior room décor, StarMEX ZEN air conditioners are available in three colours specially chosen to blend in naturally wherever installed.



MSY-EF Black

Stylish Line-up Matches Any Room Décor

The streamlined wall-mounted indoor units have eloquent silver-bevelled edges, expressing sophistication and quality. Combining impressively low power consumption and quiet yet powerful performance, these units provide a best-match scenario for diverse interior designs while simultaneously ensuring maximum room and energy savings.

Weekly Timer Function

Easily sets desired temperatures and operation start/stop times to match lifestyle patterns. Reduces wasted energy consumption by using the timer to prevent forgetting to turn off the unit and eliminate temperature setting adjustments.

Easy Set-up Using Dedicated Buttons

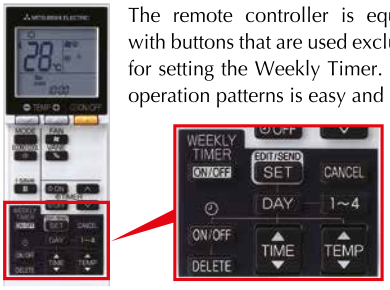

The remote controller is equipped with buttons that are used exclusively for setting the Weekly Timer. Setting operation patterns is easy and quick.

Settings

- A maximum of 4 ON or OFF timers can be set for individual days of the week
- A maximum of 28 ON or OFF timers can be set for a week.

E.g. : Runs at 24°C from waking up to leaving home, and runs at 27°C from getting home to going to bed on weekdays.
Runs at 27°C from waking up late to going bed early on weekends.

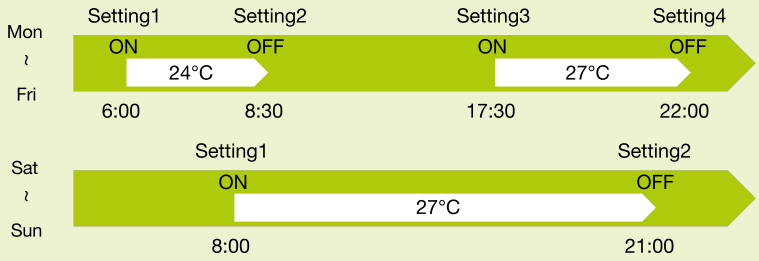

Quiet Comfort All Day Long

Mitsubishi Electric's advanced "Quiet Mode" fan speed setting provides super-quiet operation as low as 21dB for EF10/13 models. This unique feature makes the StarMEX ZEN series ideal for use in any situation.

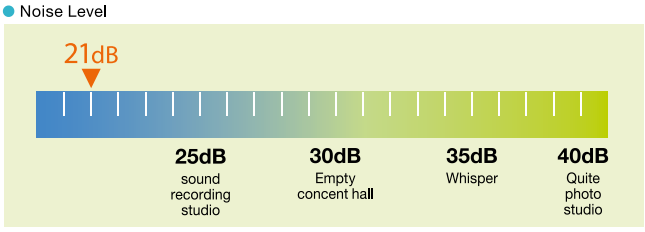

Nano Platinum Filter

This filter incorporates nanometre-sized platinum-ceramic particles that generate stable antibacterial and deodourising effects. The size of the three-dimensional surface has been increased as well, enlarging the filter capture area. These features give the Nano Platinum Filter better dust collection performance than conventional filters. The superior air-cleaning effectiveness raises room comfort yet another level.

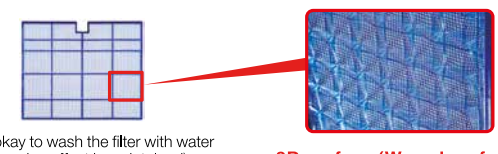

※ It is okay to wash the filter with water (air-cleaning effect is maintained)

3D surface (Waved surface)

Superior Exterior and Operating Design Concept

The indoor unit of the StarMEX ZEN keeps its amazingly thin form even during operation. The only physical change noticeable is the movement of the variable vent. As a result, a slim attractive look is maintained.

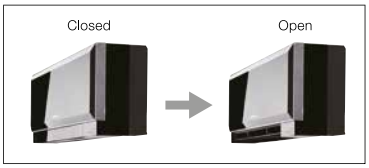

PLA Series

New 4-way Ceiling Cassette Provided with Radiation Temperature Sensor, "i-see sensor," Presents Advanced and Upgraded Thermal Comfort.





Fully Evolved New 4-way Ceiling Cassette

Wide Airflow

The new wide shape vane capable of wide angle air supply provides comfort even at the corners of a room regardless of cooling and heating operation. A reduction in the air speed by 20% compared to the conventional product eliminates uncomfortable draft sensation for friendly air conditioning.



Draft-less Air Distribution

The horizontal blow mode] newly employed supplies airflow horizontally not bringing cooled/warmed air directly to occupants thus preventing discomfort sensation due to excessive cooling or direct exposing of occupants to the air blow.

- Default
- The ceiling may be smudged at a spot where the supplied airflow is seriously disturbed.



Draft-less air distribution can be performed by horizontal blow.

Setting of Airflow Direction by Individual Vane

When the airflow direction at the outlet is desired to be changed for altering of your room layout or for switching over of cooling and heating operation at the applicable season, a troublesome work was required in the past. However, the new settings in 4-way Ceiling Cassette can changed by using the wired remote controller.



The New Swing Function Warms All Corners of the Room

The wave airflow system has 4 vanes where each vane runs independently. Repeating of horizontal and down blows with a time lag allows the conditioned warm air to be distributed evenly to room corners thus preventing uneven room temperature distribution.

- Operation image of "Wave Airflow"

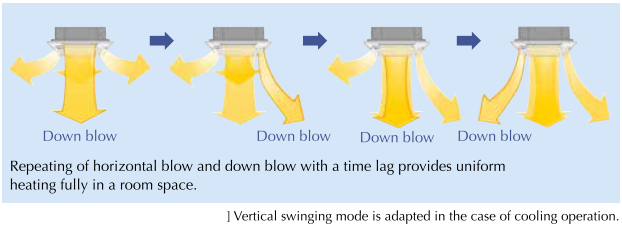

] Vertical swinging mode is adapted in the case of cooling operation.

- Thermograph of wave control effect

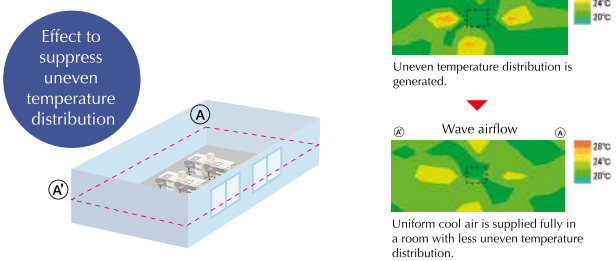

- Comparison was made at a time for about 20 minutes after starting of the 4-way Ceiling Cassette PLA-RP71BA. The measuring point for comparison located on a plain surface of 1.2m above the floor.

MLZ Series

Introducing a new ceiling cassette type in the Multi-Split Series, designed to streamline room interior dimensions and looks.



Ceiling Mounted Style

Ceiling mounted installation helps streamline room interiors. The overhead format is also an excellent solution when lighting equipment is installed at the center of the room and fixtures like bookshelves mounted on wall surfaces.



Slim Body

This new unit is designed with a slim body only 175mm in height, ensuring easy installation even when low ceiling cavities limit installation space. Also eliminates the need for ceiling cavity service space, further reducing the dimensions required for installation.



Air Volume Settings by Ceiling Height

Dual-level air volume selection is engineered to accommodate specific ceiling heights. This feature offers the key to effective adjustments when airflow is either too strong or too weak because of the mismatching of the ceiling height.

	25	35	50
Standard	2.4m	2.4m	2.4m
High ceiling	2.7m	2.7m	2.7m

Auto Vane Control

With remote controller, the air outlet can be controled left and right, and up and down. The draft problem can be solved by this improvred air outlet control.

Left and Right



Easy Installation

Parts for greater speed and ease in the installation process are equipped. For example, a built-in drainpump (built for 500mm lift), provides flexible drain joint for easy drain hose attachment in the ceiling cavity area. Besides these, this model eliminates the need to wrap heat-insulation tape after connecting the pipes at the drain cover, a step that boosts peace of mind in preventing dew drops.

• Drain Piping Supporters

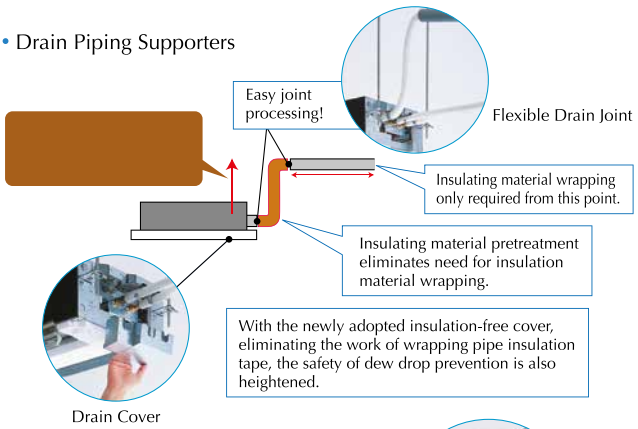

[Installation example]

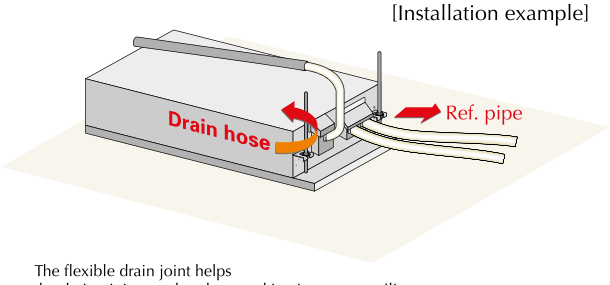

The flexible drain joint helps
the drain piping works when working in narrow ceiling areas.

• Easy Mounting Plate

The well-designed mounting plate makes the suspension work easier.





Secure one side into place



1. Push the unit over
2. Secure the other side into place



Position in the middle

PEAD Series

The thin, ceiling-concealed indoor units of this series are the perfect answer for the air conditioning needs of buildings with minimum ceiling installation space and wide-ranging external static pressure. Energy-saving efficiency has been improved, reducing electricity consumption and contributing to a further reduction in operating cost.



PEAD-RP50/60/71JA(L)

Compact Indoor Units

The height of the models from 35–140 has been unified to 250mm. Compared to the previous PEAD-RP EA model, the height has been reduced by as much as 75mm (models 100–140), making installation in low ceilings with minimal clearance space possible.



PEAD-RP JA (L)

Reduction of
75mm
(models 100–140)
compared to PEAD-EA

External Static Pressure

Five-stage external static pressure conversion is possible. Capable of being set to a maximum of 150Pa, units are applicable to a wide range of building types.

External static pressure setting

Series	35	50	60	71	100	125	140
PEAD-RP EA	30/70Pa			70/130 (with optional motor) Pa			
PEAD-RP GA	-	-	10/50/70Pa			-	-
PEAD-RP JA	35/50/70/100/150Pa						

External Static Pressure

The line-up consists of two types, models with or without a built-in drain pump.



PEAD-RP JA → Drain pump built-in



PEAD-RP JAL → No drain pump
*Units with an "L" included at the end of the model name are not equipped with a drain pump.

SEZ Series

Compact type fits neatly into lowered ceiling, achieving stringent economy in all aspects of air conditioning



SEZ-KD35/50/71VAL

Compact Ceiling Concealed Style

With our "ceiling concealed model," the air-conditioner unit itself is enclosed in the ceiling cavity, leaving only the outlet and inlet grille mounted on the ceiling surface. This greatly helps the air conditioning system to keep the quality of your interior decor.
Unit size has also been made more compact than the previous model (SEZ-KA), slashing installation space and also facilitating concealed use in buildings where exposed format units have been the rule in the past.

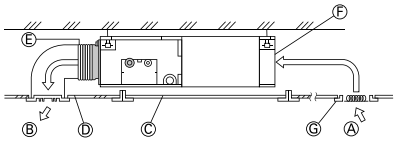

Ⓐ Air inlet
Ⓑ Air outlet
Ⓒ Access door
Ⓓ Ceiling surface
Ⓔ Canvas duct
Ⓕ Air filter
Ⓖ Inlet grille

[Dimension Comparison]

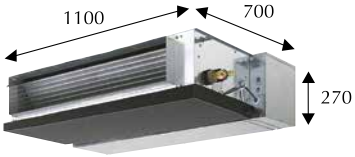

SEZ-KA35VAL

Width reduced by 110mm



Height reduced by 70mm

SEZ-KD35VAL

Wider Selection of Fan Speed and Static Pressure Level

Three fan speeds (Low-Mid-HIgh) and four static pressure levels (5-15-35-50Pa) are available by using the DC fan motor to meet various applications needs.

	External Static Pressure (Pa)
SEZ-KA35-71VA	30/50Pa
SEZ-KD35-71VAL	5/15/35/50Pa

Four Levels Installation Possible for all Models

With expansion of the minimum level of external static pressure, it is now possible to achieve low room noise by selecting the optimum static pressure.

	SPL (Low fan mode)	
	SEZ-KA	SEZ-KD
External static pressure	30Pa	15Pa
35	30dB	23dB
50	31dB	30dB

Maximum noise reduced by 7dB

Drain Pump Equipping Possible (optional)

Our drain pump (PAC-KE07DM-E) has been added to the lineup as an optional part.
Equipping this pump makes it possible to install drain hoses up to 550mm in length.

Mr.SLIM Inverter Single Split System

SAVE R410A OZONE

Our Inverter Technology adjusts capacity in response to conditions such as the difference between the outside and inside air temperatures, allowing our air conditioners to run more efficiently and reduce energy costs.



PLY Series

Indoor Unit





Dimensions (W X D X H) : 840 X 840 X 258 mm

PLY-P18BA
Cooling capacity: 5.3kW

PLY-P24BA
Cooling capacity: 7.1kW





Dimensions (W X D X H) : 840 X 840 X 298 mm

PLY-P30BA
Cooling capacity: 8.8kW

PLY-P36BA
Cooling capacity: 10.6kW

PLY-P42BA
Cooling Capacity: 12.3KW

DC Inverter | PAM Control | 24 | Weekly Timer | High Low | Multi-Language | SAVE R410A OZONE

Outdoor Unit



SUY-KA18VA
Dimensions (W X D X H) :
800 X 285 X 550 mm



SUY-KA24/30/36VA
Dimensions (W X D X H) :
840 X 330 X 880 mm



PUY-P42VKA
Dimensions (W X D X H):
1050 x 330 x 1338 mm

Mr Slim Inverter Ceiling Cassette Type PLY Series

Model							
Indoor			PLY-P18BA	PLY-P24BA	PLY-P30BA	PLY-P36BA	PLY-P42BA
Outdoor			SUY-KA18VA	SUY-KA24VA	SUY-KA30VA	SUY-KA36VA	PUY-P42VKA
Function & type			Cooling, Ceiling Cassette				
Capacity (Min-Max)		kW	5.30 (2.8-5.4)	7.1 (3.6-8.9)	8.80 (4.1-9.7)	10.6 (4.1-10.7)	12.3 (6.2-14.1)
Total power input		kW	1.47	2.02	2.36	3.13	3.68
Full load COP			3.69	3.54	3.82	3.45	3.39
Weighted COP**			4.43	4.28	4.51	4.25	4.34
Starting current		A	6.17	8.44	9.44	12.51	28.5
Running current		A	6.17	8.44	9.44	12.51	28.5
Airflow (High)		CMM(m³/min)	12-13-14-16	14-16-18-20	20-22-25-28	24-26-29-32	
Dimension (W x D x H)	Indoor	mm	840 X 840 X 258		840 X 840 X 298		
	Outdoor	mm	800 X 285 X 550		840 X 330 X 880		1050 X 330 X 1338
Net weight	Indoor	kg	19	22	24	26	
	Outdoor	kg	33	47	50	51	94
*Sound level (Low-High)	Indoor	dB(A)	28-29-30-32	28-30-32-34	33-35-38-41	37-39-41-44	
	Outdoor	dB(A)	51	54	56	58	55
Connection method	Indoor/Outdoor		Flared				
External Piping Diameter	Gas (ø)	mm	12.70	15.88			
	Liquid (ø)	mm	6.35	9.52			
Max. length		m	20	30			50
Max. height		m	12	15			30
Power supply		V, Phase, Hz	230V, Single Phase, 50Hz				
Energy labelling scheme							

*Note: Sound level is measured in anechoic chambers. ** Tested based on NEA energy labelling scheme.

Conversion formula: Btu/h=kW x 3412

Mr.SLIM
Inverter Single Split System

SAVE R410A OZONE

Our Inverter Technology adjusts capacity in response to conditions such as the difference between the outside and inside air temperatures, allowing our air conditioners to run more efficiently and reduce energy costs.



PEY Series

Indoor Unit





optional

Dimensions (W X D X H) : 900 x 732 x 250 mm

PEY-P18JA
Cooling capacity: 5.3kW

Dimensions (W X D X H) : 1100 x 732 x 250 mm

PEY-P24JA
Cooling capacity: 7.1kW





optional

Dimensions (W X D X H) : 1400 x 732 x 250 mm

PEY-P30JA
Cooling capacity: 8.8kW

PEY-P36JA
Cooling capacity: 10.6kW

PEY-P42JA
Cooling Capacity: 12.3KW

Outdoor Unit



SUY-KA18VA
Dimensions (W X D X H) :
800 X 285 X 550 mm



SUY-KA24/30/36VA
Dimensions (W X D X H) :
840 X 330 X 880 mm



PUY-P42VKA
Dimensions (W X D X H):
1050 x 330 x 1338 mm

DC Inverter | PAM Control | 24 | Weekly Timer | Multi-Language | SAVE R410A OZONE

Mr Slim Inverter Ceiling-Concealed Type PEY Series

Model							
Indoor			PEY-P18JA	PEY-P24JA	PEY-P30JA	PEY-P36JA	PEY-P42JA
Outdoor			SUY-KA18VA	SUY-KA24VA	SUY-KA30VA	SUY-KA36VA	PUY-P42VKA
Function & type			Cooling, Ceiling Concealed				
Capacity (Min-Max)		kW	5.30 (2.8-5.4)	7.1 (3.6-8.9)	8.80 (4.1-9.7)	10.6 (4.1-10.7)	12.3 (6.2-14.1)
Total power input		kW	1.57	2.02	2.5	3.33	3.84
Full load COP			3.69	3.54	3.82	3.45	3.39
Weighted COP**			4.43	4.28	4.51	4.52	4.34
Starting current		A	6.17	8.44	9.44	12.51	28.5
Running current		A	6.17	8.44	9.44	12.51	28.5
Airflow (High)		CMM(m³/min)	12-14.5-17	17.5-21-25	24-29-34	29.5-35.5-42	
Dimension (W x D x H)	Indoor	mm	900 X 732 X 250	1100 X 732 X 250	1400 X 732 X 250		
	Outdoor	mm	800 X 285 X 550		840 X 330 X 880		1050 X 330 X 1338
Net weight	Indoor	kg	27	29	38	39	
	Outdoor	kg	33	47	50	51	94
*Sound level (Low-High)	Indoor	dB(A)	30-35-39	30-34-39	33-38-42	36-40-44	
	Outdoor	dB(A)	51	54	56	58	55
Connection method	Indoor/Outdoor		Flared				
External Piping Diameter	Gas (ø)	mm	12.70	15.88			
	Liquid (ø)	mm	6.35	9.52			
Max. length		m	20	30			50
Max. height		m	12	15			30
Power supply		V, Phase, Hz	230V, Single Phase, 50Hz				

*Note: Sound level is measured in anechoic chambers. ** Tested based on NEA energy labelling scheme.

Conversion formula: Btu/h=kW x 3412

Mr.SLIM Inverter Single Split System

SAVE R410A OZONE

Our Inverter Technology adjusts capacity in response to conditions such as the difference between the outside and inside air temperatures, allowing our air conditioners to run more efficiently and reduce energy costs.



PCY Series

Indoor Unit





optional

Dimensions (W X D X H) : 1280 x 680 x 230 mm

PCY-P18KA
Cooling capacity: 5.3kW

PCY-P24KA
Cooling capacity: 7.1kW





optional

Dimensions (W X D X H) : 1600 x 680 x 230 mm

PCY-P30KA
Cooling capacity: 8.8kW

PCY-P36KA
Cooling capacity: 10.6kW

PCY-P42KA
Cooling Capacity: 12.3KW

Outdoor Unit



SUY-KA18VA
Dimensions (W X D X H) :
800 X 285 X 550 mm



SUY-KA24/30/36VA
Dimensions (W X D X H) :
840 X 330 X 880 mm



PUY-P42VKA
Dimensions (W X D X H):
1050 x 330 x 1338 mm

DC Inverter | PAM Control | 24 | Weekly Timer | High Low | Multi-Language | SAVE R410A OZONE

Mr Slim Inverter Ceiling-Suspended Type PCY Series

Model			EASY CLEAN, WIDE & LONG				
Indoor			PCY-P18KA	PCY-P24KA	PCY-P30KA	PCY-P36KA	PCY-P42KA
Outdoor			SUY-KA18VA	SUY-KA24VA	SUY-KA30VA	SUY-KA36VA	PUY-P42VKA
Function & type			Cooling, Ceiling Suspended				
Capacity (Min-Max)		kW	5.30 (2.8-5.4)	7.1 (3.6-8.9)	8.80 (4.1-9.7)	10.6 (4.1-10.7)	12.3 (6.2-14.1)
Total power input		kW	1.51	2.1	2.6	3.13	3.68
Full load COP			3.69	3.54	3.82	3.45	3.39
Weighted COP**			4.43	4.28	4.51	4.25	4.34
Starting current		A	6.17	8.44	9.44	12.51	28.5
Running current		A	6.17	8.44	9.44	12.51	28.5
Airflow (High)		CMM(m³/min)	16-17-18-20	16-18-20-22	24-26-28-30	27-29-32-34	
Dimension (W x D x H)	Indoor	mm	1280 X 680 X 230		1600 X 680 X 230		
	Outdoor	mm	800 X 285 X 550		840 X 330 X 880		1050 X 330 X 1338
Net weight	Indoor	kg	32	32	37	40	
	Outdoor	kg	33	47	50	51	94
*Sound level (Low-High)	Indoor	dB(A)	34-36-38-40	34-36-40-42	39-41-43-45	42-44-46-48	
	Outdoor	dB(A)	51	54	56	58	55
Connection method	Indoor/Outdoor		Flared				
External Piping Diameter	Gas (ø)	mm	12.70	15.88			
	Liquid (ø)	mm	6.35	9.52			
Max. length		m	20	30			50
Max. height		m	12	15			30
Power supply		V, Phase, Hz	230V, Single Phase, 50Hz				
Energy labelling scheme							

*Note: Sound level is measured in anechoic chambers. ** Tested based on NEA energy labelling scheme.

Conversion formula: Btu/h=kW x 3412

starMEX Plus Series



Indoor Unit



MSXY-FJ



PEFY-P VMA(L)-E



Branch Box

PAC-MK31BC
Dimension(W x D x H)
450 x 280 x 170

Outdoor Unit



MXY-4C100VA (4HP)
MXY-5C125VA (5HP)
MXY-6C140VA (6HP)

Dimension (W x D x H)
1050 x 330 x 1338 mm

starMEX Plus Series

MSXY-FJ Indoor specification

Model- Indoor Unit				MSXY-FJ05VE	MSXY-FJ07VE	MSXY-FJ10VE	MSXY-FJ13VE	MSXY-FJ18VE	MSXY-FJ24VE
Rated Capacity			kW	1.5	2	2.8	3.5	5	7.1
Power Input			kW	0.028		0.038		0.05	0.059
Running Current			A	0.28	0.28	0.35	0.35	0.45	0.52
Airflow Rate			m3/min	15.1	15.1	16.9	16.9	18.7	19.9
Sound Level			dB(A)	19-42	19-42	19-47	19-47	28-49	30-50
Dimension (W x D x H)			mm	923 x 250 x 305					
Net Weight			kg	13					
External Piping	Diameter	Gas (Φ)	mm	9.52	9.52	9.52	9.52	12.7	15.88
		Liquid (Φ)	mm	6.35	6.35	6.35	6.35	6.35	9.52

Model- Outdoor Unit				MXY-4C100VA	MXY-5C125VA	MXY-6C140VA
Capacity			kW	11.2	14	15.5
Total Power Input			kW	2.3	2.88	3.19
Full load COP				5.75	5.38	5.39
Weighted COP				6.1	6.11	6.05
Running Current			A	10.97	13.72	15.29
Dimension (W x D x H)			mm	1050 x 330 x 1338		
Net Weight			kg	122		
Sound Level			dB(A)	49	50	51
External Piping	Diameter	Gas (Φ)	mm	15.88		
		Liquid (Φ)	mm	9.52		
	Connectivity Range			50% - 130%		
Piping Length	PEFY (Per unit)		m	30	30	30
	MSXY-FJ / SEZ (Per unit)		m	25	25	25
	Outdoor unit to Branch Box		m	55	55	55
	* Total Length			150 ~ 240	150 ~ 270	150 ~ 300
Power Supply				230V, Single Phase, 50Hz		
Energy Labelling Scheme						

** Please refer to Service Handbook for detailed specification.*

FEATURES

For your convenience, leave this flap extended to check features.

Energy Saving

DC Inverter

Temperature Range Restriction

PAM Control

Econo Cool

New LEV Control

Fuzzy Logic "I Feel"

Comfort

The Quietest Air-Conditioner In The Market

3D i-see sensor

An infrared-ray sensor that measures the temperature at distant positions. While moving to the left and right, eight vertically arranged sensor elements analyze the room temperature in three dimensions. Making it possible to judge where people are in the room to create proper airflow.

Quiet Operation

Powerful Cool

Wide Control

Long Air-flow

Auto Mode

Computerised Dehumidification

Eliminate dampness for healthier and more comfortable air-conditioning, while enjoying great year-round economy.

5 Step Vane Control & Swing Mode

Five different airflow patterns & "Swing" mode match the interior layout and people in the room.

Fresh Air

Anti-Allergy Enzyme Filter

Electrostatic Anti-allergy Enzyme Filter

The filter is charged with static electricity, enable it to trap allergens such as molds and bacteria and decompose them using enzymes retained in the filter.

Catechin Plus Pre-Filter

Double Air Cleaning Filter

Traps dust and other small particles such as pollen, mould and dust mites which can cause allergic reactions. The filter removes particles as small as 0.01 microns.

Nano Platinum Filter

The filter has a large capture area and incorporates nanometre-sized platinum-ceramic particles that work to kill bacteria and deodourise the circulating air. Better dust collection than conventional filters is also ensured.

Plasma Quad

A plasma-based filter system that effectively removes four kinds of air pollutants; namely, bacteria,viruses, allergens and dust,which the air contains countless particles of.

Convenience

Operation Lock

Prevent Operation settings from being changed.

Multi-Language

Control panel operation in eight different languages.

24-Hour On/Off timer

On/Off operation can be set simultaneously in 10-minute increment for a 24-hour period.

Weekly Timer

Easily set desired temperatures and operation start/stop times to match lifestyle patterns.

Auto Restart

This function permits automatic return to previous operation conditions after a sudden power black-out. You can now sleep peacefully all through the night without having to get up and turn your air-conditioner back on.

Smart Control

Press the same button twice in repetition to immediately return to the previous temperture setting

I Save Mode

This is a simplified setting function that recalls the preferred (preset) temperature by pressing a single button on the remote controller.

Installation & Maintenance

R410A Refrigerant

The new HAB(hard alkyl benzene) refrigerant oil is a unique oil that degrades very slowly. In addition to this new oil, our exclusive cleaning-free technology incorporates a specially developed high-efficiency oil separator and heat exchangers that are optimally designed to prevent oil stagnation. These benefits make it possible to reuse existing piping even when installing a new model.

Cleaning-Free, Pipe Reuse Technology

Turning to our air-conditioner refrigerants, because the use of the Hydrochloro-fluorocarbon R22 is destructive to the ozone layer, we have switched to the new refrigerant R410A with zero ozone depletion potential.

Easy Clean Design

Durable Electronic Metal Housing Box

This special box protects the electronic circuitry from dust ensuring its reliable operation and preventing fire in the event of a short circuit.

Anti-Rust Treatment

Emergency Circuit Protection

In the event of sudden power surge, e.g. lightning, the circuits of 3 safety barriers (fuse, baristor, and surge absorber) are automatically broken first to protect the printed circuit board (PCB).

Self-Diagnostic Function

In the unlikely event of a malfunction, the LED on the indoor unit flashes to indicate the exact spot to be checked.

		Mitsubishi Electric starMEX		Mr.SLIM		Mitsubishi Electric starMEX Plus Series
		Inverter		Inverter		Inverter
		Indoor	Outdoor	Indoor	Outdoor	Outdoor
		MSY-GE10/13/15/18/24/26VA MSY-EF10/13/18VA MSY-FL10VE SEZ-KD35/50/60/71VAL	MXY-3A28/4A28VA MXY-4A38VA MXY-2E20VA MUY-GE10/13/15/18/24VA MUY-FL10VE MXY-5G48VA MXY-3G28VA / 4G28VA MXY- 4G38VA MXY-2G20VA	PLY-P18/24/30/36/42BA PCY-P18/24/30/36/42KA PFY-P18/24/30/36/42JA	SUY-KA18/24/30/36VA PUY-P42VKA	MXY-4c100VA MXY-5C125VA MXY-6C140VA
Cooling	Upper limit	32°C DB / 23°C WB	46°C DB	32°C DB / 23°C WB	46°C DB	46°C DB

Note

1. Rating conditions: Cooling – Indoor: 27°C DB / 19°C WB; Outdoor: 35°C DB.
   Refigerant piping length (one way): 5 meters / indoor unit (inverter)
2. Due to the compact high efficient design of heat exchanger, the use of wall mounted and cassette fan coil units are not recommended for hair saloon environment. Please contact our Dealers for recommendations of appropriate models.
3. Guaranteed operating range:

Mitsubishi Electric Quality

The best quality you can rely on.

Our quality assurance program guided by our stringent Quality Policy ensures confidence in all phases of the development process from design and manufacture, to the finished product.


Line test


Sound test


Performance test



Endurance test



Heat stress test



Saltwater spray rust test



Technical assistance within 24 hours.

At Mitsubishi Electric, customers are our priority, which is why we provide attentive after-sales service to respond to your needs within 24 hours. Our service records show that upon receipt of a customer service request, more than 90% of them were completed on the same day, or the next working day. That's the kind of service you can look forward to. Because that's our way of thanking you for putting your trust in Mitsubishi Electric.

MITSUBISHI ELECTRIC ASIA PTE LTD

307 Alexandra Road, #05-01/02, Mitsubishi Electric Building, Singapore 159943
TEL: (65) 6473 2308 FAX: (65) 6476 0590
Office Hours: Monday - Friday 8:30am - 5:30pm
Show Room Opening Hours:
Monday - Friday 8:30am - 5.30pm
Closed on Saturday, Sunday and Public Holidays
Tel: (65) 6470 2600

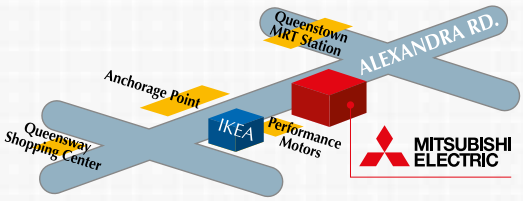

Mitsubishi Electric

starMEX

Air-Conditioner



eco Changes

for a greener tomorrow

Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.

MITSUBISHI ELECTRIC CORPORATION
HEAD OFFICE: TOKYO BLDG. 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN

MITSUBISHI ELECTRIC ASIA PTE LTD
307 Alexandra Road, Mitsubishi Electric Building, Singapore 159943.
Tel: (65) 6473 2308 **Fax**: (65) 6476 0590, Office Hours: Monday - Friday 8.30am - 5.30pm
Show Room Opening Hours: Monday - Friday 8:30am - 5.30pm, Closed on Saturday, Sunday and Public Holidays
(Showroom) **Tel**: (65) 6470 2600. **http://www.MitsubishiElectric.com.sg**

New publication effective January 2016

Specifications subject to change without notice. Due to printing consideration, the actual colors may vary slightly from those shown inside brochure.